

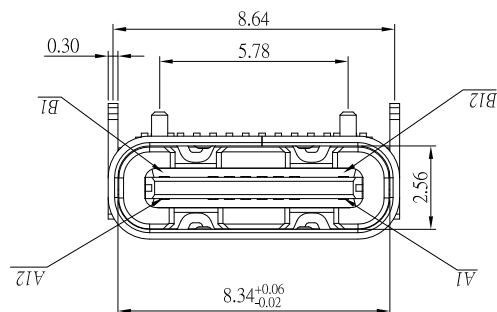
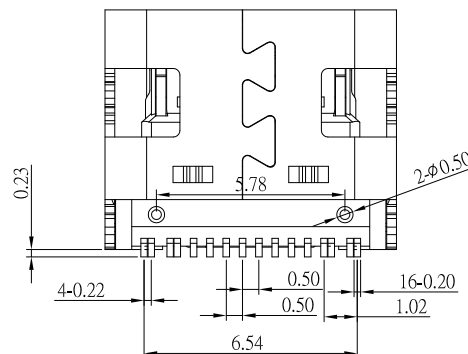
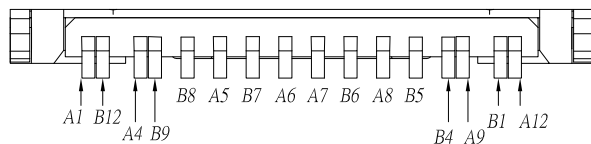
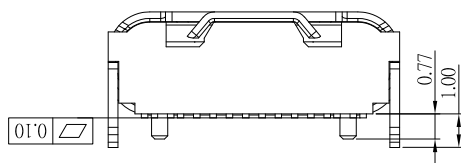
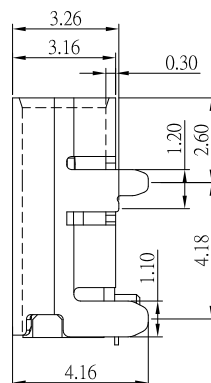
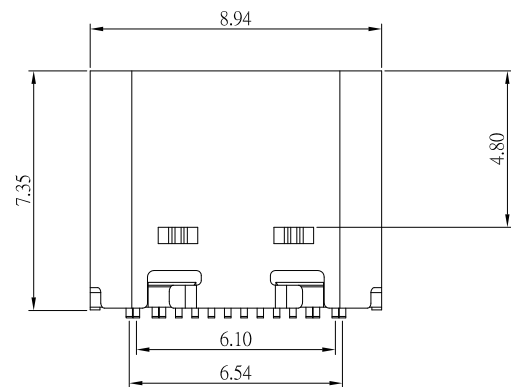




鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

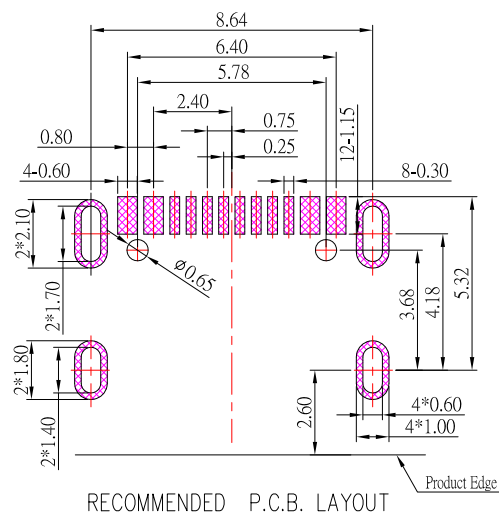

- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	11/14/1

CHECKED BY:	DATE
Jacky Chen	11/14/1

APPROVED BY:	DATE:
Tony Kao	11/14/1

DATE _____

11/14/1

DATE _____

DATE _____
PAGE _____

11/14/1

DATE _____

MAT'L

[illegible]

FINISH

SCALE

--	--

SHEET N

TITLE	CONNECTOR
-------	-----------

MODLE	USB TYPE C 2
-------	--------------

DWG NO	SBC-160S1A-2
--------	--------------

PART NO. SBC-160S1A-2

	SIZE
	A4
	VER
	R1