

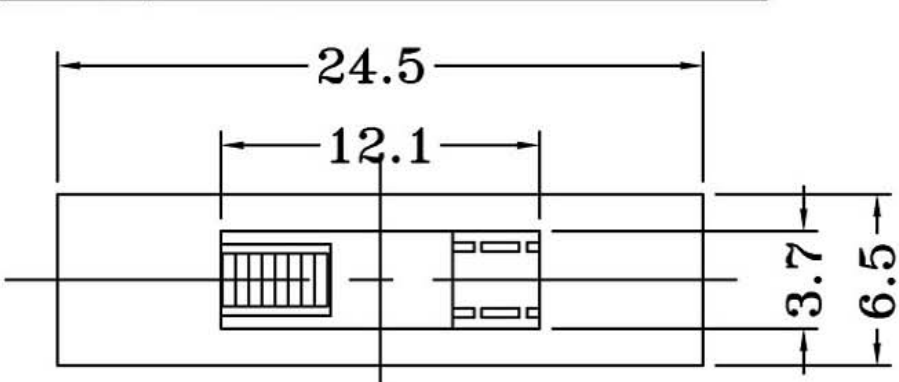
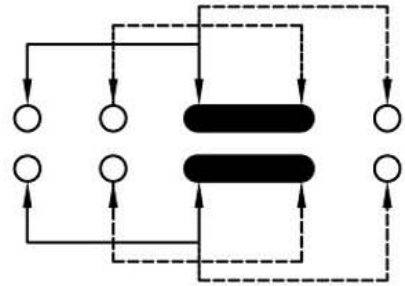


P.C.B LAYOUT
BOTTOM VIEW

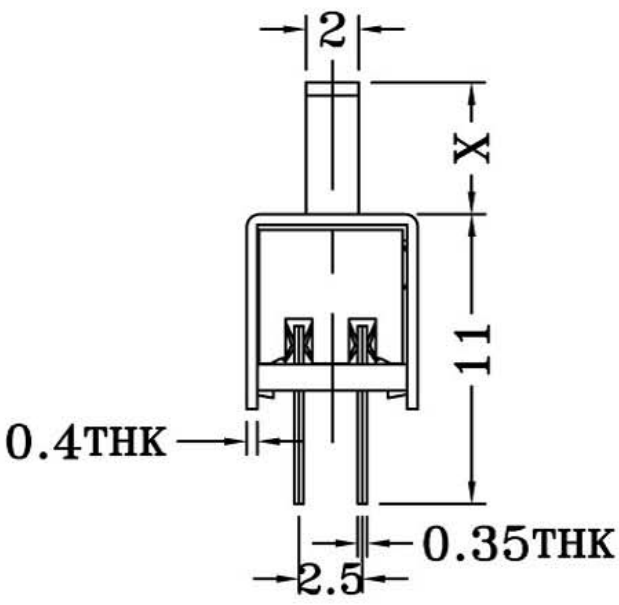

SCHEMATIC (NON-SHORTING)

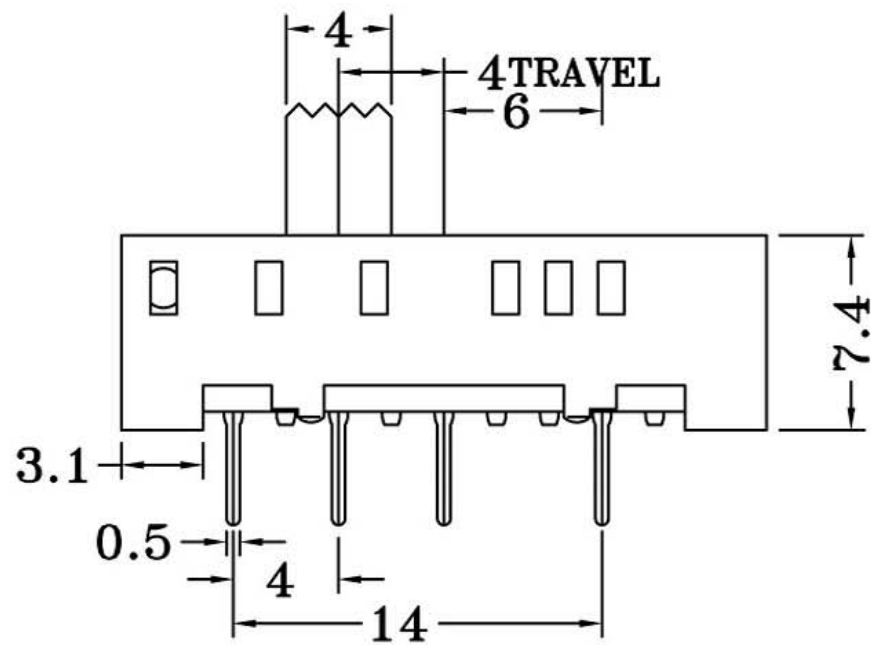

- 拨动开关立式技术参数:
- 1. 额定负荷: DC 30V 50V 0.3A 0.5A
 - 2. 接触阻抗: $\leq 50\text{m}\Omega$
 - 3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
 - 4. 耐焊温度: $250\pm 5^\circ$ 5s
 - 5. 使用寿命: 10,000 cycles
 - 6. 使用温度: -25°C to 80°C
 - 7. 使用湿度: $\leq 85\%\text{ RH}$
 - 8. 操作力 : 160gf 256gf 300gf 可定制
 - 9. 手柄长度: 2mm-10mm 可定制

注: "*"表示关键尺寸 (6个)

8					TOLERANCE				
7	STEEL BALL	STEEL	1	NATURAL	UNLESS SPECIFIED				
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN	A	2012-10-26	初版	
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	TERMINAL	BRASS STRIP	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.:	
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL:		SCALE: 3:1	DWN.	2012-10-26
2	FRAME	STEEL STRIP	1	Ni PLATED	东莞市高迪电子有限公司				CHK'D
1	KNOB	POM	1	BLACK					2012-10-26
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD.