



SBC-160S1-20x-S271

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

SPECIFICATIONS

Electrical:



- 1.Rating: 0.5A
- 2.Dielectric Withstand Voltage: 250V AC
- 3.Contact Resistance: 30 mΩ Max
- 4.Insulation Resistance: 100 MΩ Min

Material:




- 1.Housing: LCP
- 2.Contact: PHOSPHOR BRONZE
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

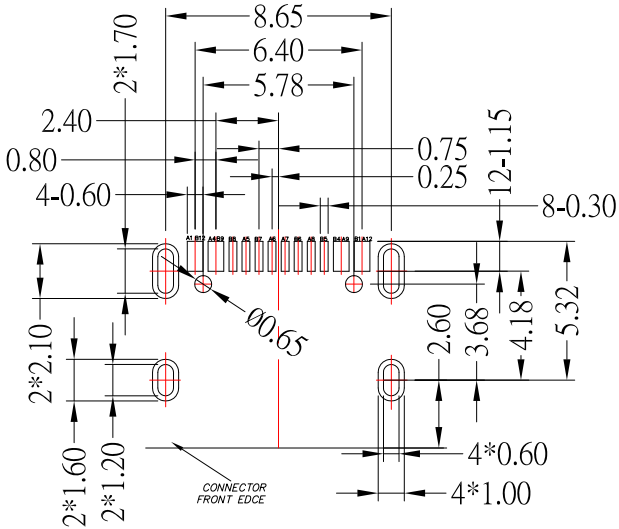

RECOMMENDED P.C.B. LAYOUT

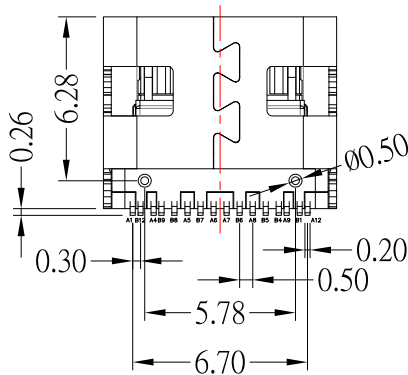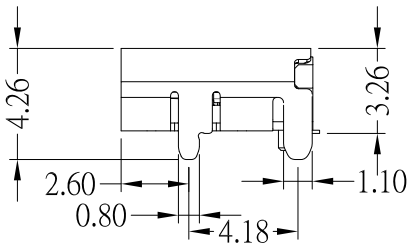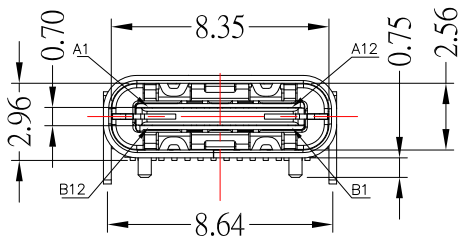

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	04/07/17
CHECKED BY:	DATE
Jacky Chen	04/07/17
APPROVED BY:	DATE
Tony Kao	04/07/17

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB TYPE C 2.0 板上型帶彈片
SCALE	1 : 1	DWG NO.	SBC-160S1-20x-S271
SHEET NO.	1 of 1	PART NO.	SBC-160S1-20x-S271

SIZE
A4
VER
R