
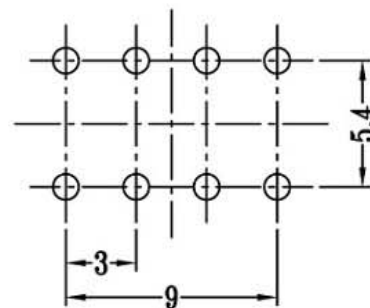
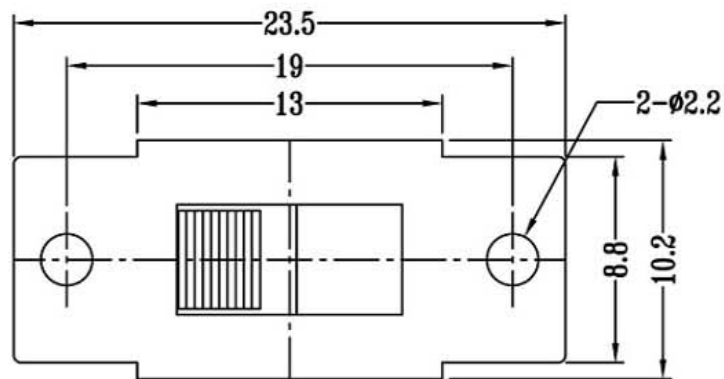
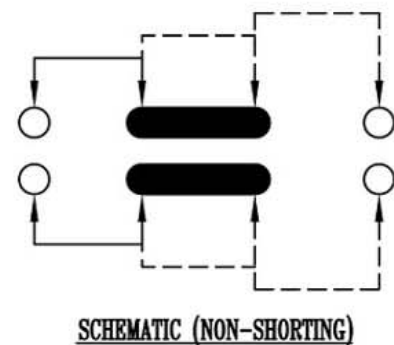
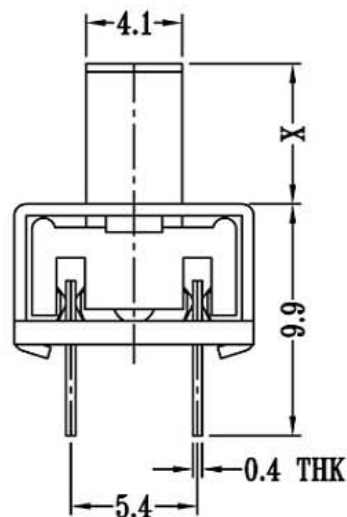


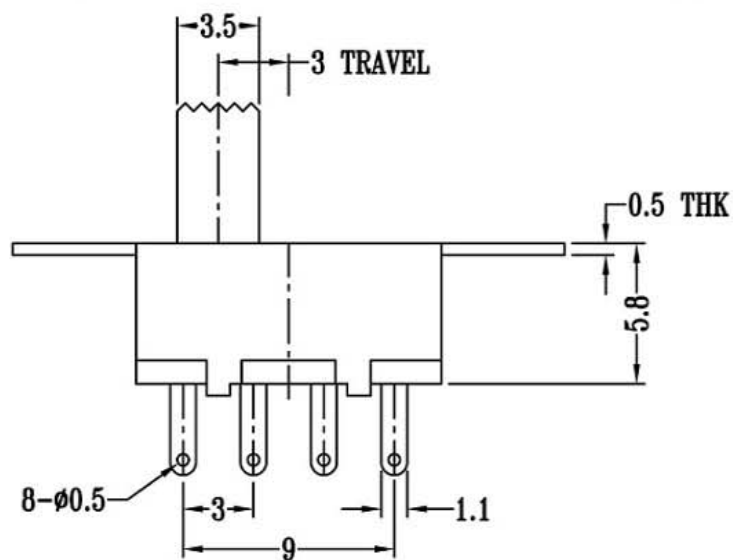

P.C.B LAYOUT
BOTTOM VIEW

- 拨动开关立式技术参数:
1. 额定负荷: DC 30V 50V 0.3A 0.5A
 2. 接触阻抗: $\leq 50m\Omega$
 3. 绝缘阻抗: $\geq 100m\Omega$ DC500V
 4. 耐焊温度: $250\pm 5^{\circ}$ 5s
 5. 使用寿命: 10,000 cycles
 6. 使用温度: -25°C to 80°C
 7. 使用湿度: $\leq 85\%$ RH
 8. 操作力 : 160gf 256gf 300gf 可定制
 9. 手柄长度: 2mm-10mm 可定制

注: "*"表示关键尺寸 (6个)

8					TOLERANCE UNLESS SPECIFIED							
7	STEEL BALL	STEEL	1	NATURAL	WITHIN OVER	A	2012-10-26	初 版				
6	SPRING	STEEL WIRE	1	NATURAL		ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.		
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH MODEL:			UNIT : mm SCALE: 3:1			DRWG NO.:	
4	TERMINAL	BRASS STRIP	8	Ag PLATED								
3	BASE	PHENOLIC RESIN	1	NATURAL	东莞市高迪电子有限公司			DWN.		2012-10-26		
2	FRAME	STEEL STRIP	1	Ni PLATED								
1	KNOB	POM	1	BLACK								
NO.	PARTS	MATERIALS	Q'TY	FINISH				CHK'D		2012-10-26		
							APPD.					