


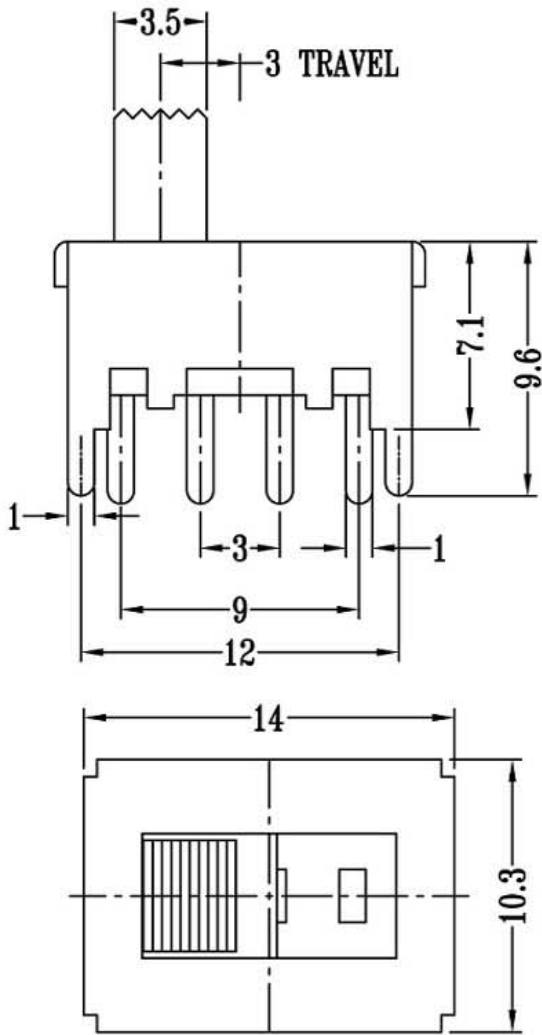


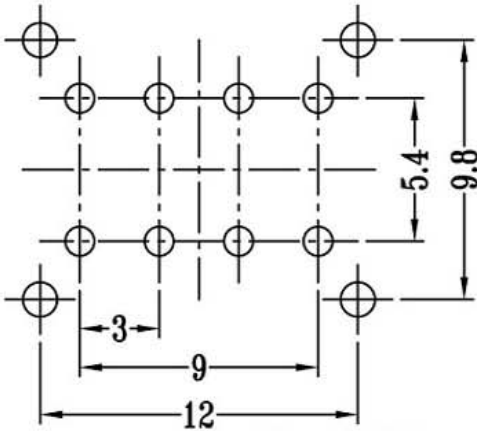

注: "*"表示关键尺寸(6个)

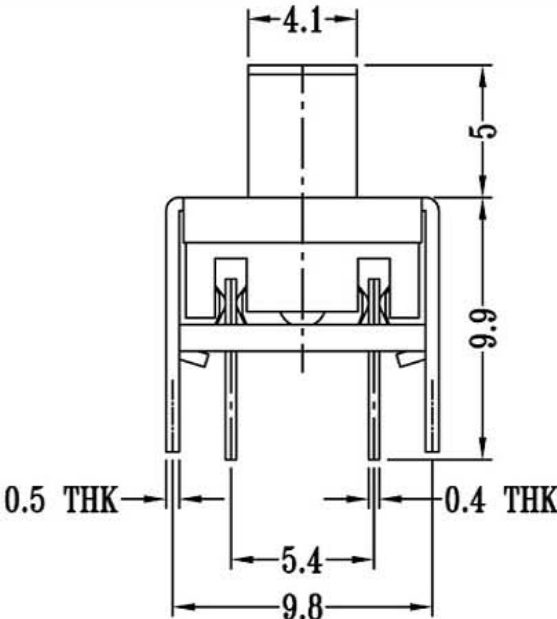

P.C.B LAYOUT
BOTTOM VIEW

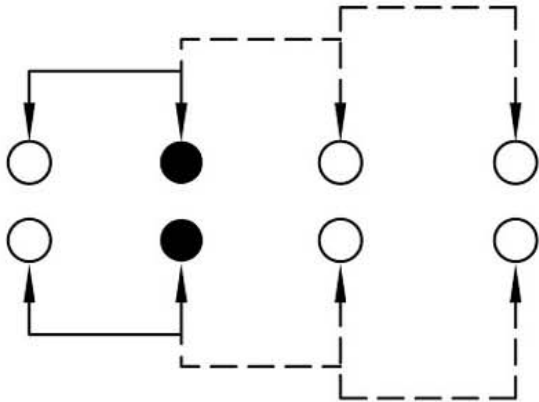

SCHEMATIC (NON-SHORTING)

- 拨动开关立式技术参数:
- 1. 额定负荷: DC 30V 50V 0.3A 0.5A
 - 2. 接触阻抗: $\leq 50\text{m}\Omega$
 - 3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
 - 4. 耐焊温度: $250\pm 5^{\circ}$ 5s
 - 5. 使用寿命: 10,000 cycles
 - 6. 使用温度: -25°C to 80°C
 - 7. 使用湿度: $\leq 85\%$ RH
 - 8. 操作力 : 160gf 256gf 300gf 可定制
 - 9. 手柄长度: 2mm-10mm 可定制

8					TOLERANCE							
7	STEEL BALL	STEEL	1	NATURAL	UNLESS SPECIFIED							
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN		A	2012-10-26	初 版			
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER		ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.		
4	TERMINAL	BRASS STRIP	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH			UNIT : mm		DRWG NO.:		
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL:			SCALE: 3:1		DWN.	2012-10-26	
2	FRAME	STEEL STRIP	1	Ni PLATED	东莞市高迪电子有限公司						CHK'D	2012-10-26
1	KNOB	POM	1	BLACK							APPD.	
NO.	PARTS	MATERIALS	Q'TY	FINISH								