
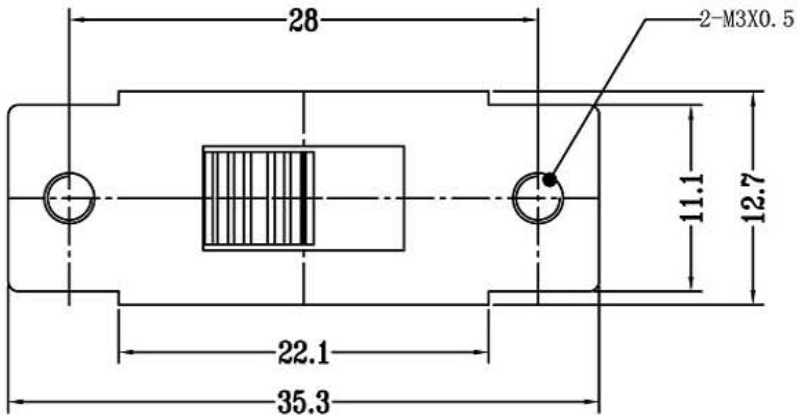
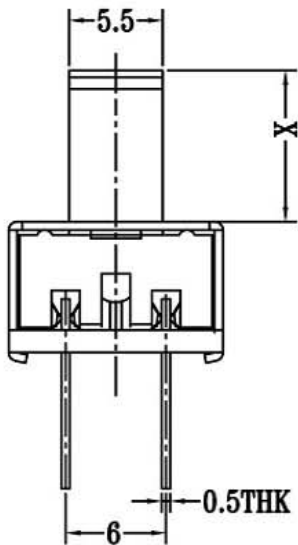
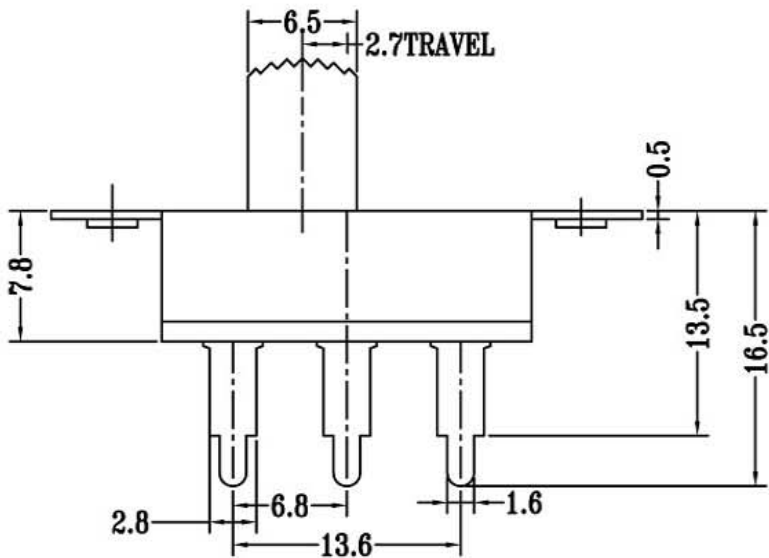


SCHEMATIC (NON-SHORTING)

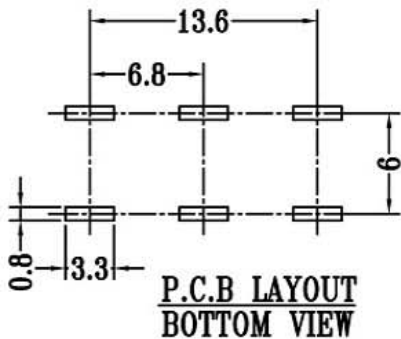

- 大电流拨动开关技术参数:
1. 额定负荷: AC 125V 250V 3A 6A 10A
 2. 接触阻抗: $\leq 50\text{m}\Omega$
 3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
 4. 耐焊温度: $250\pm 5^{\circ}\text{C}$ 5s
 5. 使用寿命: 10,000 cycles
 6. 使用温度: -25°C to 80°C
 7. 使用湿度: $\leq 85\%\text{RH}$
 8. 操作力: 160gf 256gf 300gf 可定制
 9. 手柄长度: 2mm-10mm 可定制

注: "*"表示关键尺寸 (6个)

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED						
8											
7	STEEL BALL	STEEL	1	NATURAL							
6	SPRING	STEEL WIRE	1	NATURAL							
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED							
4	TERMINAL	BRASS STRIP	8	Ag PLATED							
3	BASE	PHENOLIC RESIN	1	NATURAL							
2	FRAME	STEEL STRIP	1	Ni PLATED							
1	KNOB	POM	1	BLACK							
					TITLE : VERTICAL SLIDE SWITCH				UNIT : mm		
					MODEL:				SCALE: 3:1		
									DRWG NO.:		
									DWN.		
									2012-10-26		
									CHK'D		
									2012-10-26		
									APPD.		

东莞市高迪电子有限公司