

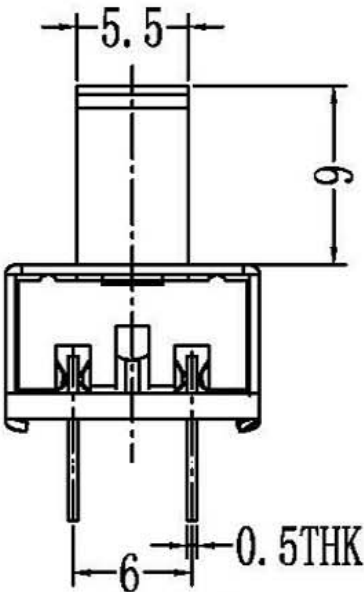
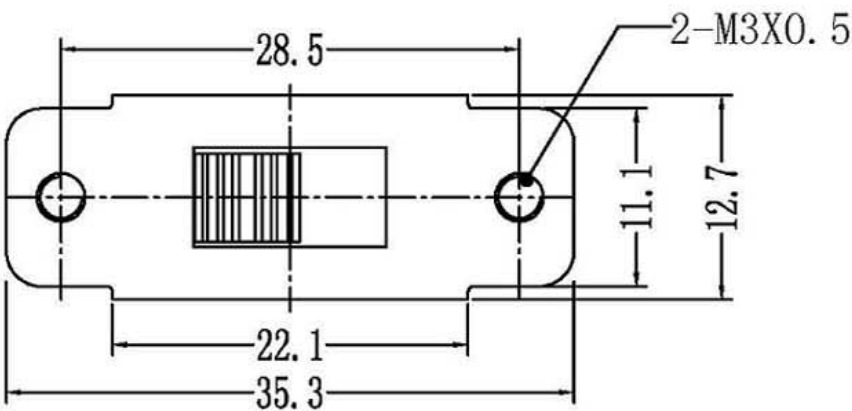


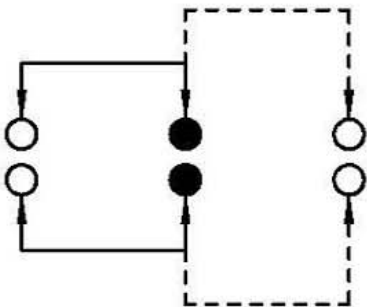


注:"*"表示关键尺寸(6个)

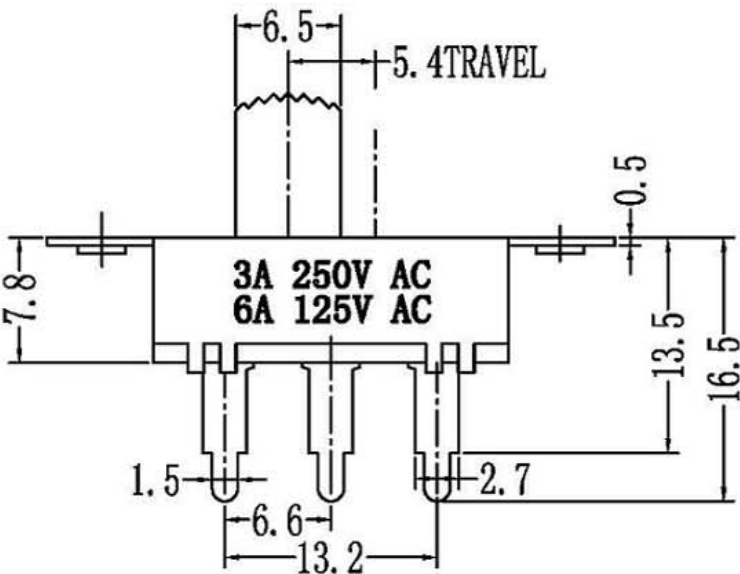

SCHEMATIC (NON-SHORTING)

- 大电流拨动开关技术参数:
1. 额定负荷: AC 125V 250V 3A 6A 10A
 2. 接触阻抗: $\leq 50\text{m}\Omega$
 3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
 4. 耐焊温度: $250\pm 5^{\circ}\text{C}$ 5s
 5. 使用寿命: 10,000 cycles
 6. 使用温度: -25°C to 80°C
 7. 使用湿度: $\leq 85\%\text{RH}$
 8. 操作力: 160gf 256gf 300gf 可定制
 9. 手柄长度: 2mm-10mm 可定制

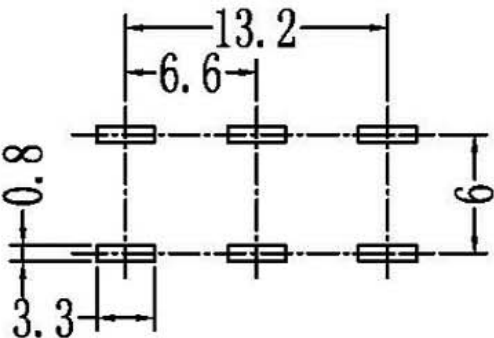

8					TOLERANCE									
7	STEEL BALL	STEEL	1	NATURAL	UNLESS SPECIFIED									
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN		A	2012-10-28	初 版					
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER		ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.		
4	TERMINAL	BRASS STRIP	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH				UNIT : mm		DRWG NO.:			
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL:				SCALE: 3:1		DWN.		2012-10-28	
2	FRAME	STEEL STRIP	1	Ni PLATED	东莞市高迪电子有限公司							CHK'D		2012-10-28
1	KNOB	POM	1	BLACK								APPD.		
NO.	PARTS	MATERIALS	Q'TY	FINISH										