

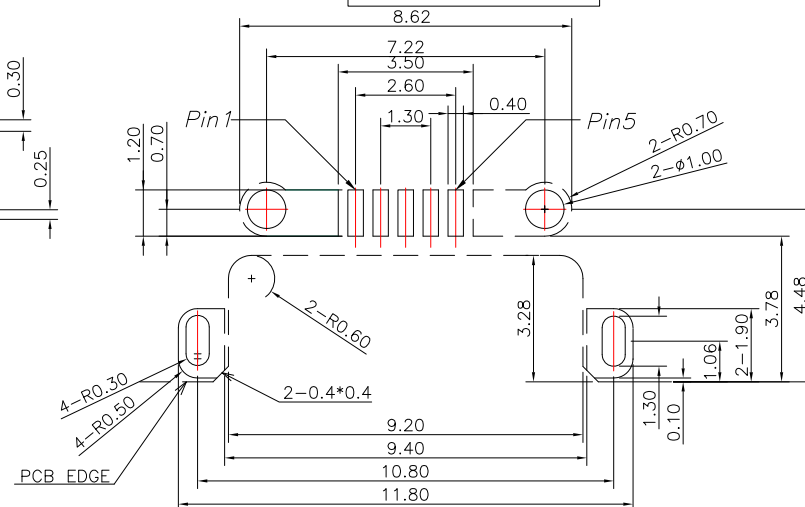
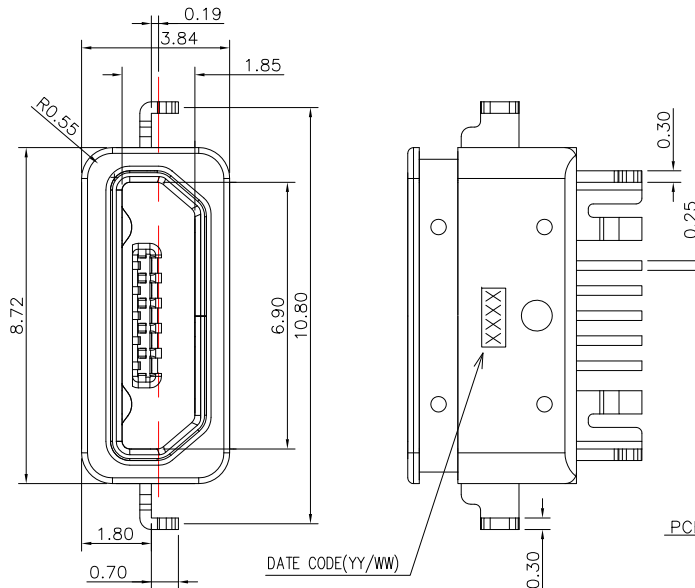


IP67

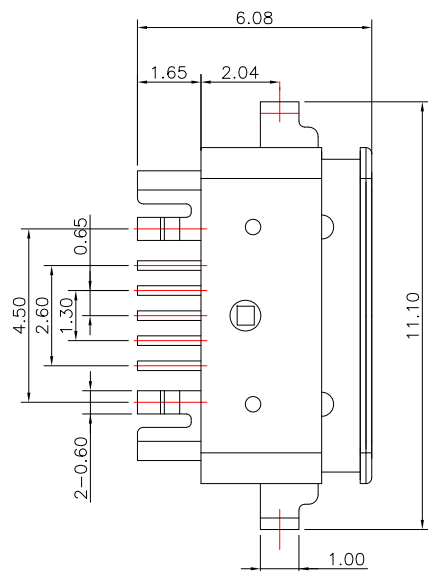

P.C.B LAYOUT MOUNTING PATTERN

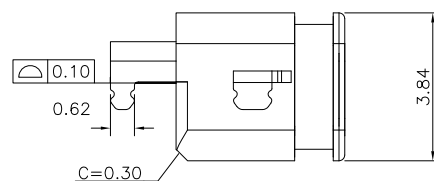

MRUSB-5B-WP13-x-S165

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

NOTES:

MATERIAL:

1.1 HOUSING: THERMOPLASTIC

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: SUS

1.4 O-RING: SILICON

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

GOLD PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 RATING: 1.0A

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 500 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 1000 MΩ MIN.



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 04/08/19
DATE: 04/08/19
DATE: 04/08/19

MAT'L
FINISH
SCALE

TITLE
MODLE
DWG NO.

CONNECTOR
MICRO USB 5PF B TYPE 沉板 板上 H 1.8 IP67
1 : 1

PART NO. MRUSB-5B-WP13-x-S165
SIZE A4
VER R5