


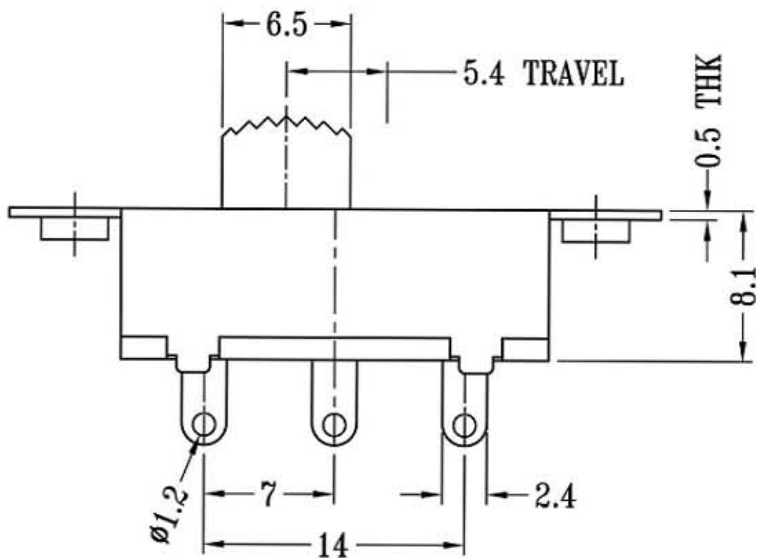


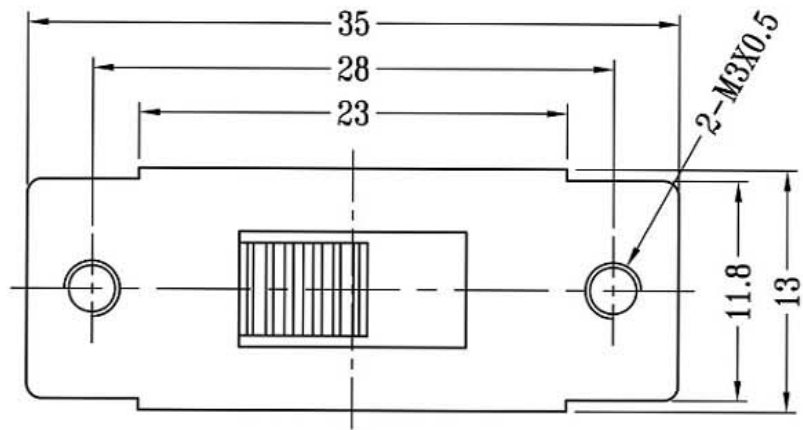


注: "*"表示关键尺寸(6个)

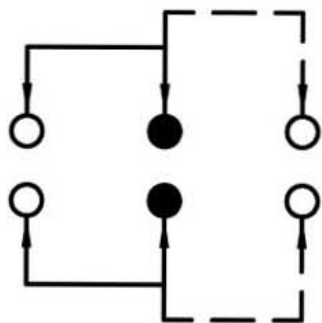

SCHEMATIC (NON-SHORTING)

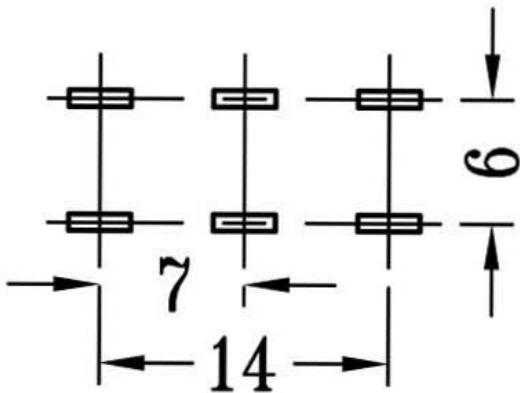

P.C.B LAYOUT
BOTTOM VIEW

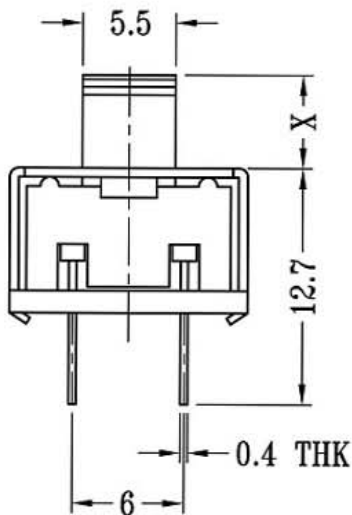

大电流拨动开关技术参数:

1. 额定负荷: AC 125V 250V 3A 6A 10A
2. 接触阻抗: ≤50mΩ
3. 绝缘阻抗: ≥100mΩ DC500V
4. 耐焊温度: 250±5° 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25 ℃ to 80 ℃
7. 使用湿度: ≤85% RH
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

8					TOLERANCE								
7	STEEL BALL	STEEL	1	NATURAL	UNLESS SPECIFIED								
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN		A	2012-10-26	初 版				
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER		ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.			
4	TERMINAL	BRASS STRIP	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH			UNIT : mm		DRWG NO.:			
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL:			SCALE: 3:1					
2	FRAME	STEEL STRIP	1	Ni PLATED	东莞市高迪电子有限公司						DWN.		2012-10-26
1	KNOB	POM	1	BLACK							CHK'D		2012-10-26
NO.	PARTS	MATERIALS	Q'TY	FINISH							APPD.		