


MRUSB-5B-WP9V-x-S382

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

IPX7

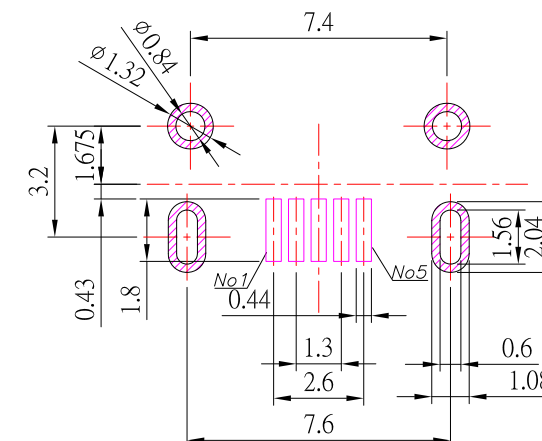

P.C.B LAYOUT MOUNTING PATTERN



NOTES:

MATERIAL:





- 1.1 HOUSING: HIGH-TEMP
- 1.2 CONTACT: COPPER ALLOY
- 1.3 SHELL: SUS

FINISH:

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER
- 3.SPECIFICATION:
 - 3.1 RATING: 1.8 A(PIN1,5) ; 1.0A(PIN2,3,4) , 30VAC
 - 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 1000 MΩ MIN.

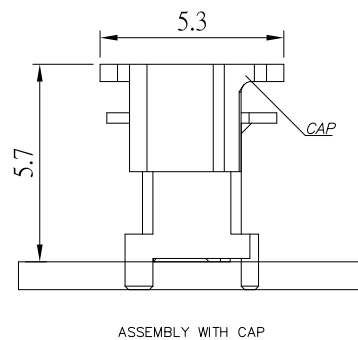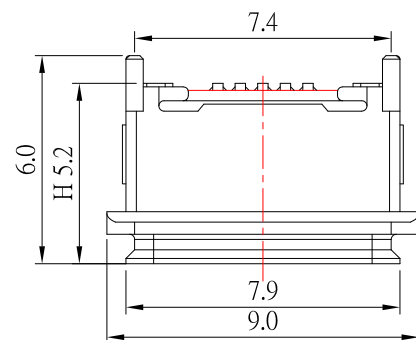

ASSEMBLY WITH CAP

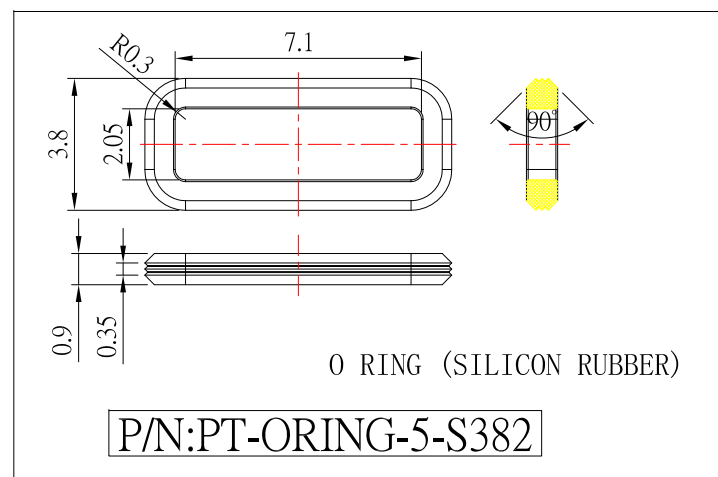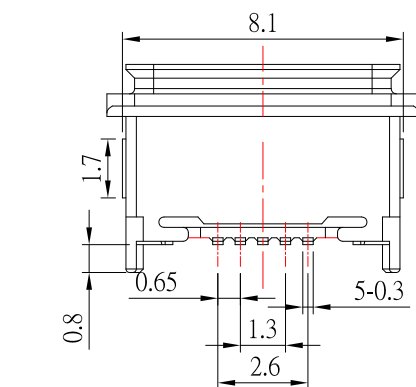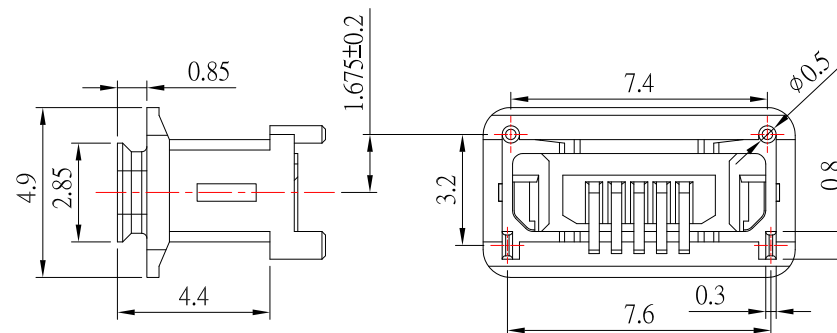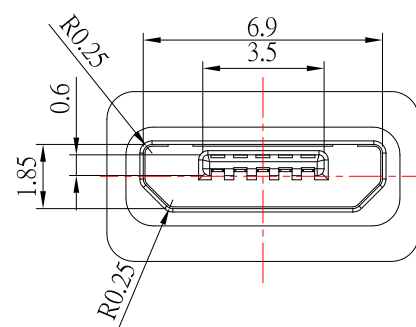

O RING (SILICON RUBBER)

P/N:PT-ORING-5-S382



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/11/19
DATE: 11/11/19
DATE: 11/11/19

MAT'L
FINISH
SCALE






TITLE
MODLE
DWG NO.

CONNECTOR
MICRO USB 5P B TYPE 直立式
防水型 IPX7

PART NO. MRUSB-5B-WP9V-x-S382

SIZE
A4
VER
R7

IPX7

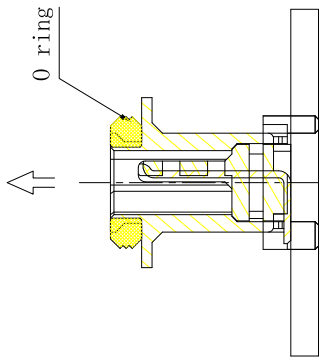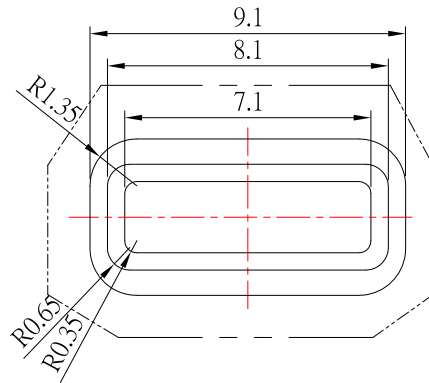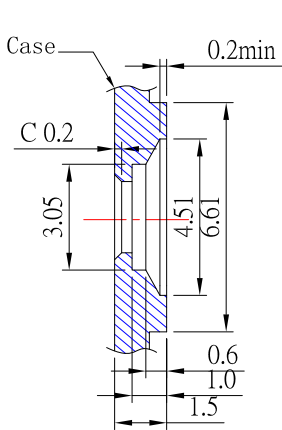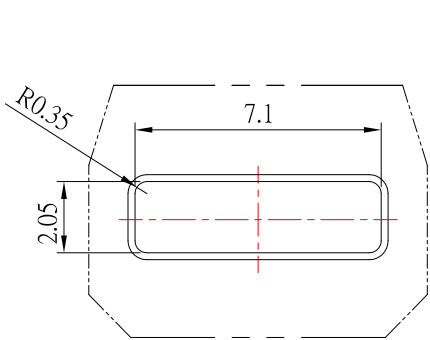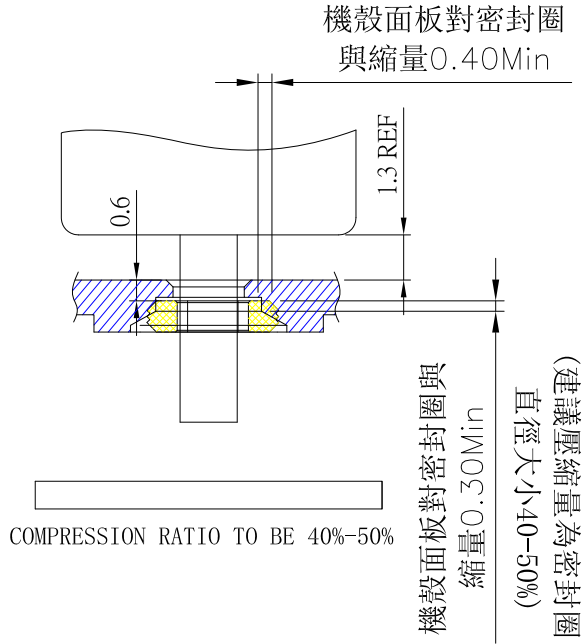

RECOMMENDED OPEN DIMENSION OF CASE

7	更新圖面	Jack	111119
6	更新Rating	Jack	042319
5	新增ORING料號	Jack	032819
4	更新樣式	Jack	121218
3	更新PCB LAYOUT尺寸	Jack	061318
2	更新尺寸	Jack	061218
1	更新圖面	Jack	052318
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/11/19			
CHECKED BY:	DATE	FINISH	MODLE	MICRO USB 5PF B TYPE 直立式 防水型 IPX7
Jacky Chen	11/11/19			
APPROVED BY:	DATE	SCALE	DWG NO.	MRUSB-5B-WP9V-x-S382
Tony Kao	11/11/19	1 : 1		
SHEET NO.	1 of 2	PART NO.	MRUSB-5B-WP9V-x-S382	SIZE A4
				VER R7