
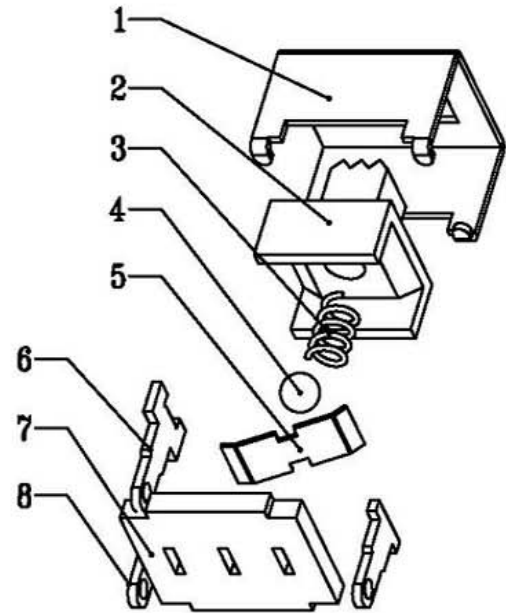
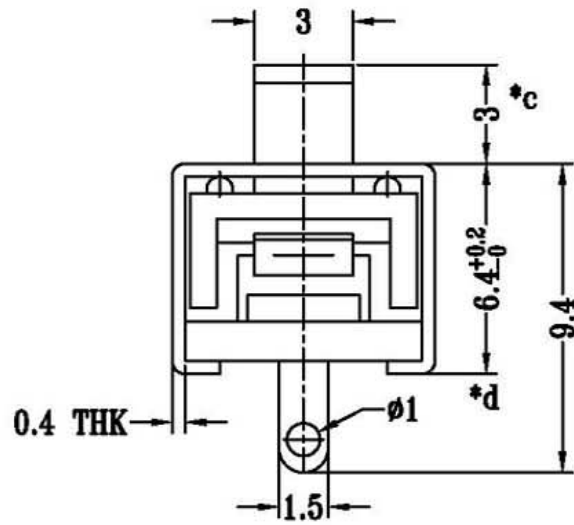
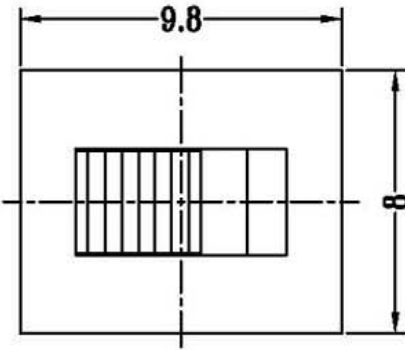
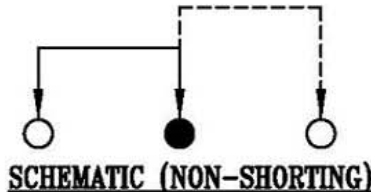


P.C.B LAYOUT
BOTTOM VIEW

产品结构示意图

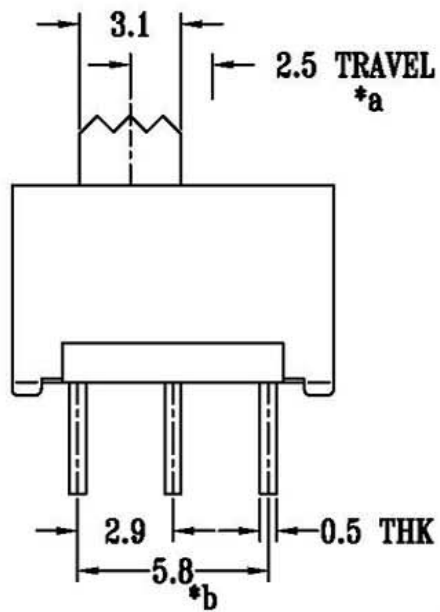

- 大电流拨动开关技术参数:
- 1. 额定负荷: AC 125V 250V 3A 6A 10A
 - 2. 接触阻抗: ≤50mΩ
 - 3. 绝缘阻抗: ≥100mΩ DC500V
 - 4. 耐焊温度: 250±5° 5s
 - 5. 使用寿命: 10,000 cycles
 - 6. 使用温度: -25 °C to 80 °C
 - 7. 使用湿度: ≤85% RH
 - 8. 操作力: 160gf 256gf 300gf 可定制
 - 9. 手柄长度: 2mm-10mm 可定制

注: "*"表示关键尺寸 (6个)

8				TOLERANCE UNLESS SPECIFIED							
7	STEEL BALL	STEEL	1		NATURAL						
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN OVER	A	2012-10-26	初 版			
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.		
4	TERMINAL	BRASS STRIP	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.:			
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL:		SCALE: 3:1	DWN.	2012-10-26		
2	FRAME	STEEL STRIP	1	Ni PLATED	东莞市高迪电子有限公司				CHK'D		
1	KNOB	POM	1	BLACK					APPD.		2012-10-26
NO.	PARTS	MATERIALS	Q'TY	FINISH							

东莞市高迪电子有限公司