


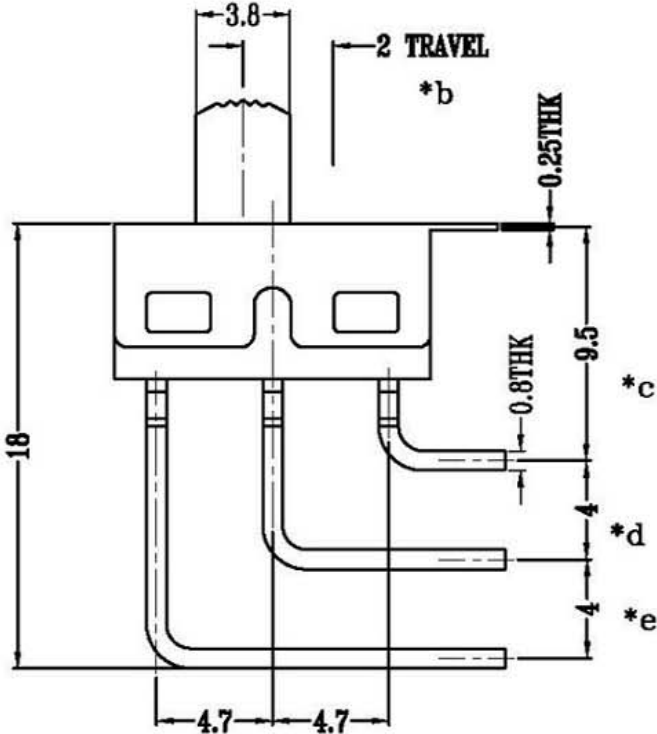
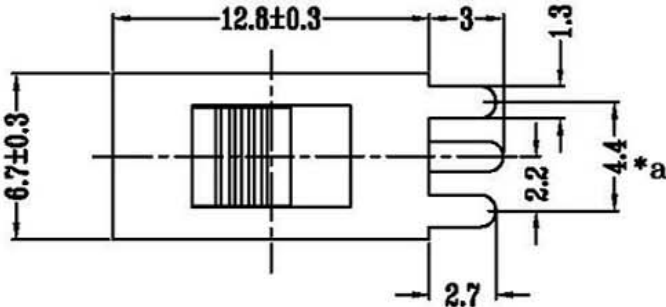


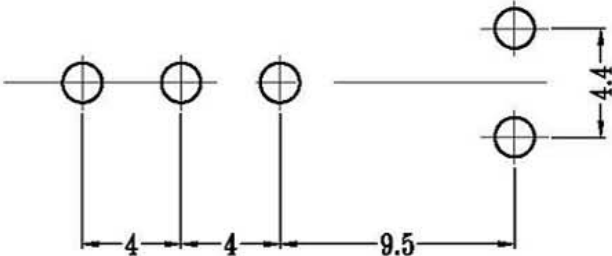

注: "*"表示关键尺寸(6个)

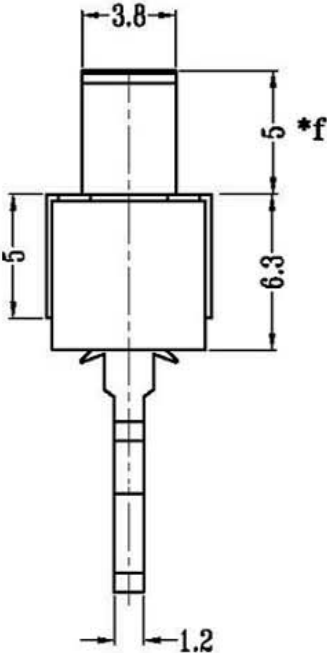

P.C.B LAYOUT
BOTTOM VIEW

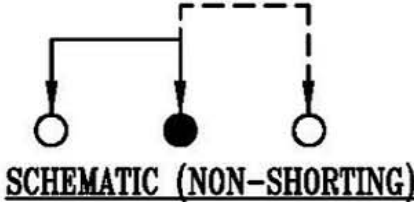

- 大电流拨动开关技术参数:
1. 额定负荷: AC 125V 250V 3A 6A 10A
 2. 接触阻抗: ≤50mΩ
 3. 绝缘阻抗: ≥100mΩ DC500V
 4. 耐焊温度: 250±5° 5s
 5. 使用寿命: 10,000 cycles
 6. 使用温度: -25 ℃ to 80 ℃
 7. 使用湿度: ≤85% RH
 8. 操作力: 160gf 256gf 300gf 可定制
 9. 手柄长度: 2mm-10mm 可定制

8					TOLERANCE							
7	STEEL BALL	STEEL	1	NATURAL	UNLESS SPECIFIED							
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN		A	2012-10-28	初 版			
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER		ISSUE	DATE	DESCRIPTIONS OF REVISION			
4	TERMINAL	BRASS STRIP	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH			UNIT : mm		DRWG NO.:		
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL:			SCALE: 3:1		DWN.	2012-10-28	
2	FRAME	STEEL STRIP	1	Ni PLATED	东莞市高迪电子有限公司						CHK'D	2012-10-28
1	KNOB	POM	1	BLACK							APPD.	
NO.	PARTS	MATERIALS	Q'TY	FINISH								