
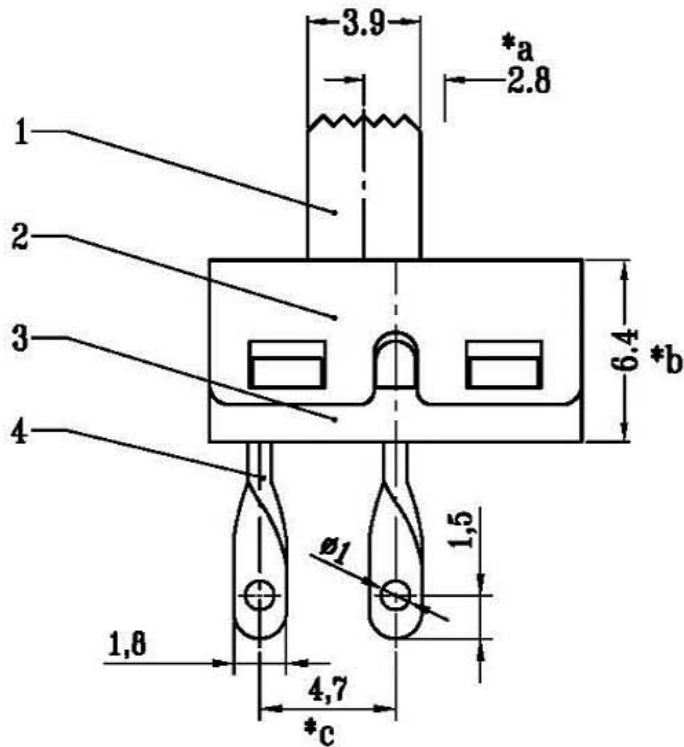
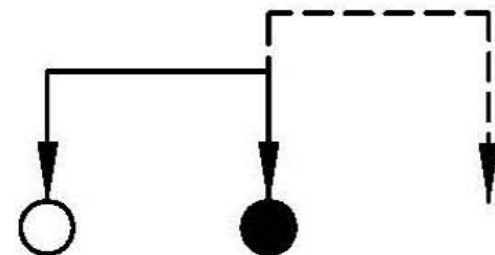
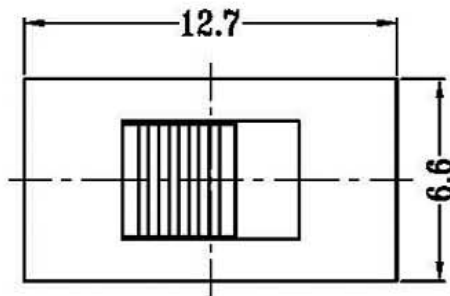


P.C.B LAYOUT
BOTTOM VIEW

注: "*"表示关键尺寸 (6个)

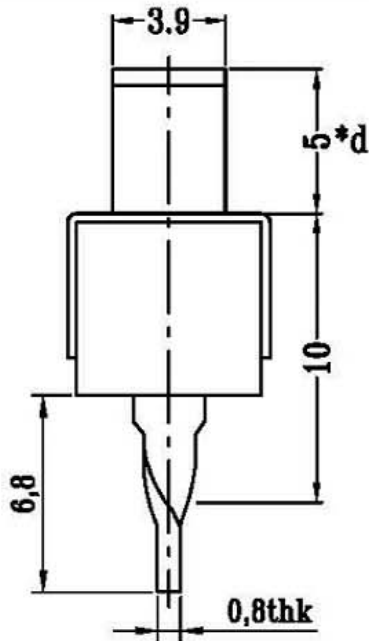

SCHEMATIC (NON-SHORTING)

大电流拨动开关技术参数:

1. 额定负荷: AC 125V 250V 3A 6A 10A
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250 \pm 5^\circ\text{C}$ 5s
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\%\text{RH}$
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

8				TOLERANCE UNLESS SPECIFIED										
7	STEEL BALL	STEEL	1		NATURAL									
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN OVER	A	2012-10-26	初 版						
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.				
4	TERMINAL	BRASS STRIP	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH			UNIT : mm	DRWG NO.:					
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL:			SCALE: 3:1	DWN.		2012-10-26			
2	FRAME	STEEL STRIP	1	Ni PLATED	东莞市高迪电子有限公司							CHK'D		2012-10-26
1	KNOB	POM	1	BLACK								APPD.		
NO.	PARTS	MATERIALS	Q'TY	FINISH										