


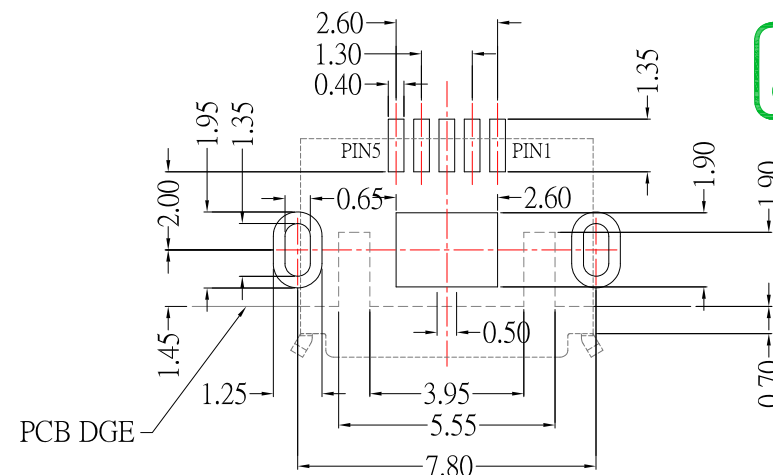

PCB LAYOUT MOUNTING PATTERN

MRUSB-5B-RV1x-S183

外殼鍍層:

Blank: Tin
NI: Ni

SPECIFICATIONS

Electrical:

- Current Rating: 1.8A(1&5PIN)
0.5A(2&3&4PIN)
- Contact Resistance: 60 mΩ Max
- Dielectric Withstanding Voltage:
100 V AC / 1 minute
- Insulation Resistance:
100 MΩ Min @ 500 VDC

Mechanical:

- Connector Mate and Unmate Force
Mate force: 3.57 kgf Max
Unmate force: 0.816 kgf Min
- Durability: 10,000 cycles Min
- Contact retention force: 0.214 kgf Min

Material:

- Housing:
High Temperature Thermal Plastics,
UL 94V-0, LCP, Black
 - Contact: Phosphor Bronze
 - Shell: Stainless Steel
- Finish:**
- Contact: Gold plated on the contact area
and Nickel under plated overall.
 - Shell: Tin under Plated surface layer
or Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	06/12/14				
CHECKED BY:	DATE	FINISH		MODLE	MICRO USB B TYPE REVERSE SHELLED DIP
Jacky Chen	06/12/14				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5B-RV1x-S183
Tony Kao	06/12/14	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-RV1x-S183
					SIZE A4
					VER R3

