



MRUSB-5B-M14xx-S347



Shell Material : SHELL 鍍層:

Blank : BRASS





TN

A : SUS

NI



SEC A-A

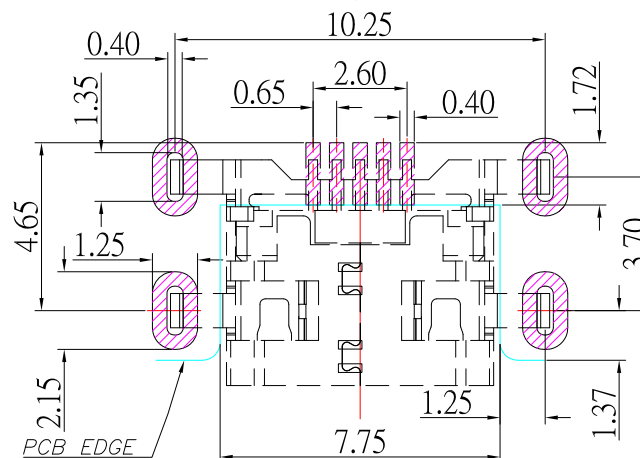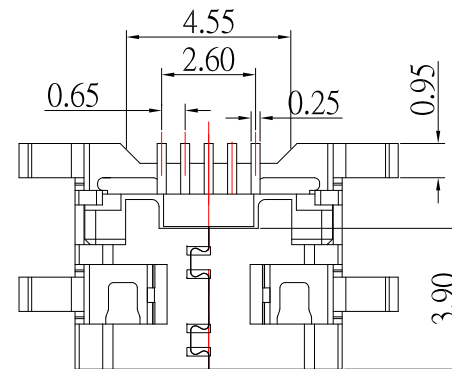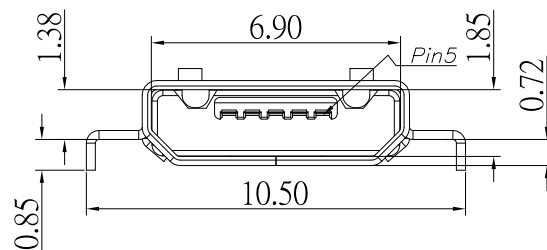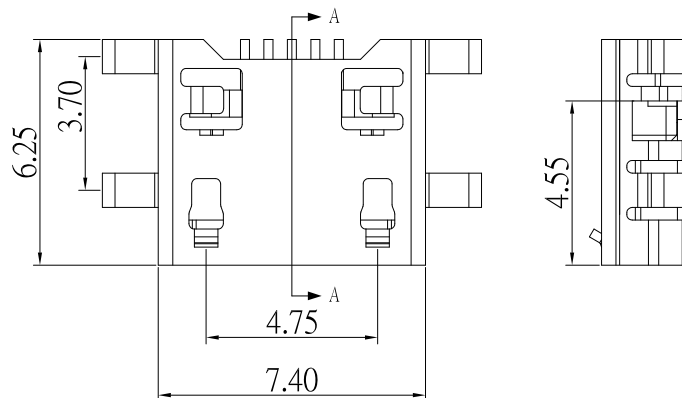

P.C.B LAYOUT MOUNTING PATTEN

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.8A(PIN1&5) ,1.0A(PIN2&3&4)
- 2.Contact Resistance: 30 mΩ Max
- 3.Dielectric Withstanding Voltage: 100 V for 1 min
- 4.Insulation Resistance: 100 MΩ Min

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: BRASS / SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer or
Tin under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
09/11/18

CHECKED BY:
Jacky Chen

DATE
09/11/18

APPROVED BY:
Tony Kao

DATE
09/11/18

MAT'L

FINISH

SCALE

1 : 1

TITLE

MODLE

DWG NO.

CONNECTOR

MICRO USB 四腳插 沉板0.8 腳長0.85
無捲邊 無接地腳

MRUSB-5B-M14xx-S347

SIZE

A4

VER

R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新PCB LAYOUT尺寸	Jack	091118
2	新增PCB LAYOUT尺寸	Jack	091018
1	新增尺寸	Jack	082818