

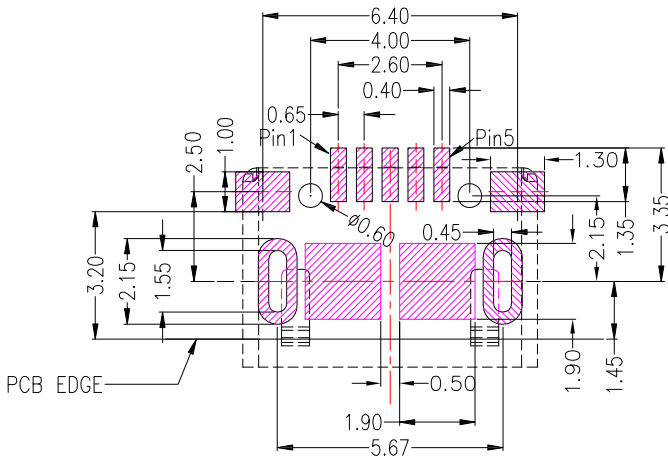
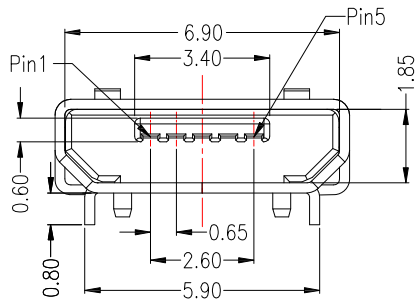
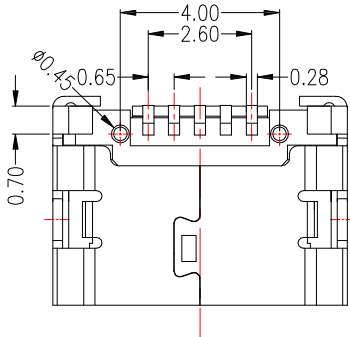

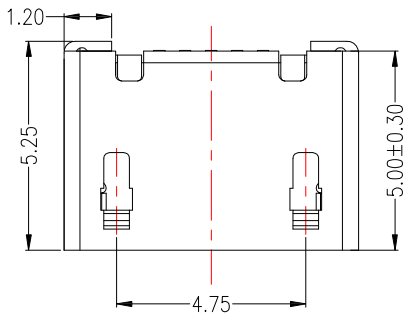


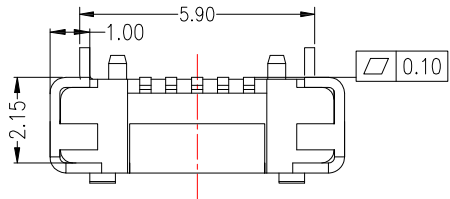

MRUSB-5B-ED8x-S347

SHELL鍍層:

TN
NI



P.C.B LAYOUT MOUNTING PATTERN

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: BRASS
- Finish:
- 2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls
Nickel under plated overall
- 3.SPECIFICATION:
- 3.1 CURRENT RATING: 1.0 A MAX
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE:
100 V(ac) FOR 1min
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
 - 3.5 TOTAL MATING FORCE: 3.57 KgF MAX.
 - 3.6 TOTAL UNMATING FORCE: 1.0 KgF MIN.
 - 3.7 LIFE: 5,000 CYCLES
 - 3.8 TEMPERATURE RANGE: -30°C ~ +80°C

5	更新PCB LAYOUT尺寸	Jack	121119
4	更新樣式	Lan	041519
3	新增PCB LAYOUT尺寸	Jack	112317
2	更新端子長度	Jack	060617
1	新增PCB LAYOUT尺寸	Jack	020317
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	12/11/19				
CHECKED BY:	DATE	FINISH		MODLE	MICRO USB B TYPE 前插5.67 後貼有柱 平口
Jacky Chen	12/11/19				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5B-ED8x-S347
Tony Kao	12/11/19	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-ED8x-S347
					SIZE A4
					VER R5