

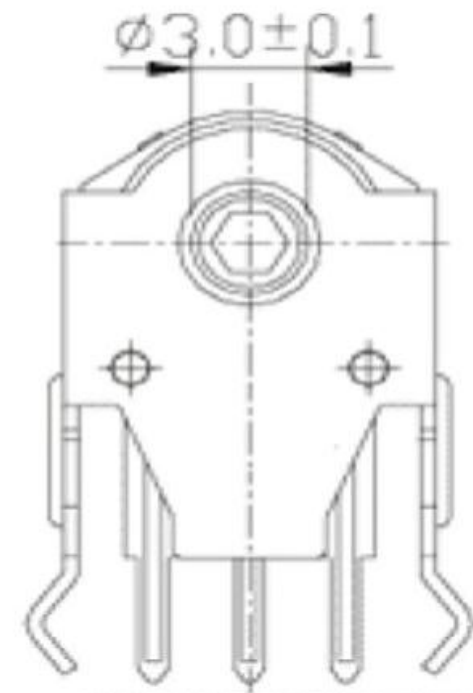


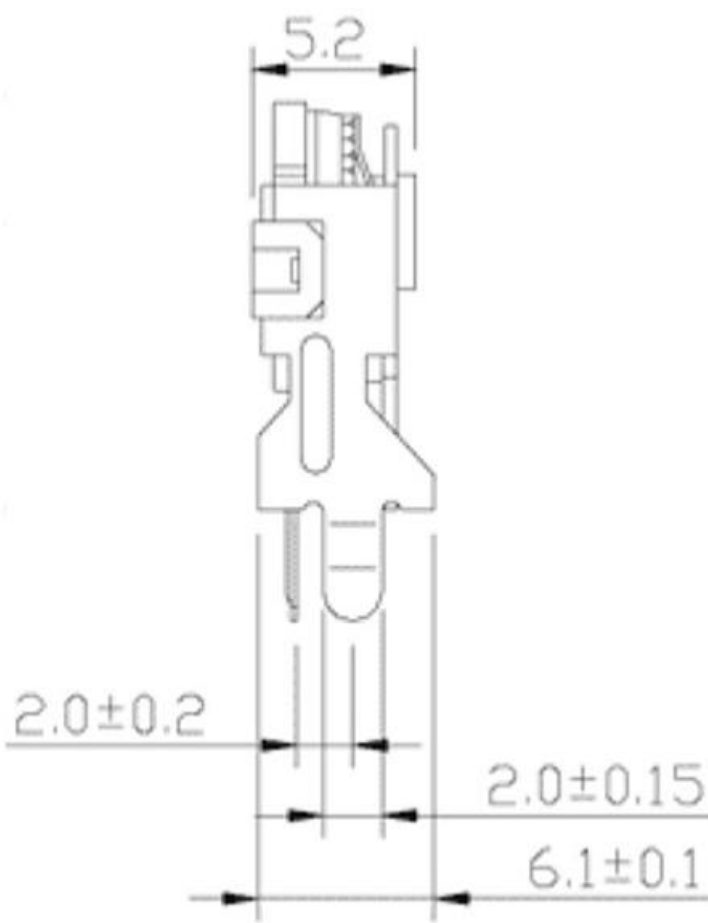

A: Output signal A
B: Output signal B

SPECIFICATIONS

1. Rating : DC 10V , 1 mA Max ;
2. Circuit : 1C - 1P ;
3. Operating force : 25 ±10 gf ;
4. Contact resistance : 100 mΩ Max ;
5. Travel : 0.25 ± 0.1 mm ;
6. Life : 150,000 Cycles Min °
(each upright and opposite roate)

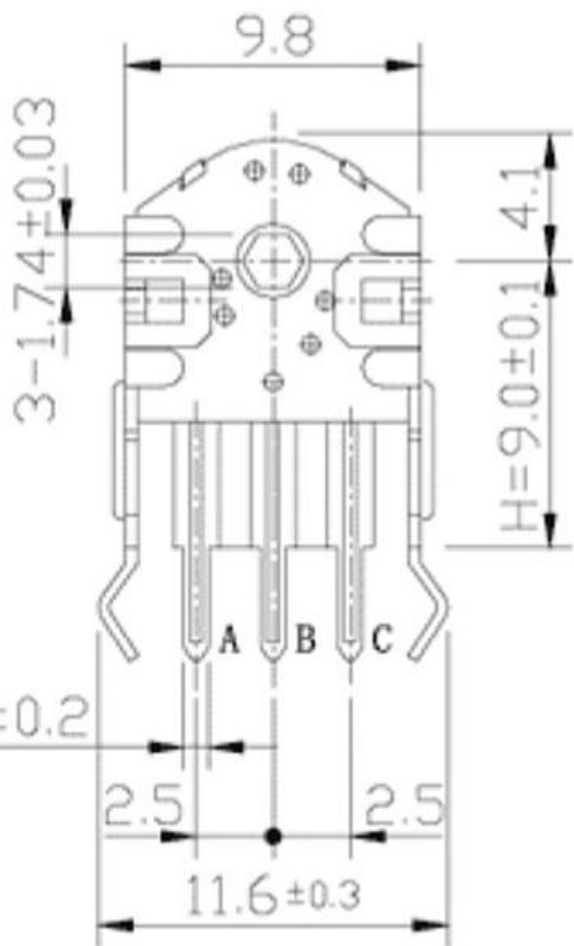

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch JacK Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Frank Wu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/17/11
DATE: 10/17/11
DATE: 10/17/11

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: ENCODER
MODLE: ENCODER
DWG NO. K50-A
PART NO. K50-A

SIZE: A4
VER: A

ITEM NO.	DESCRIPTION	DRAWN	DATE