










MRUSB-5B-D5x-S347

SHELL鍍層:

TN

NI

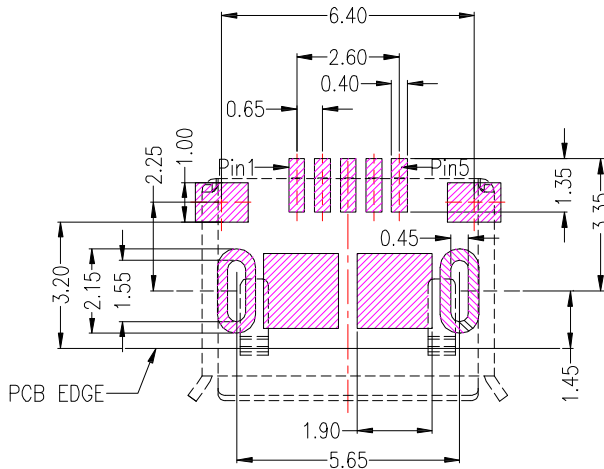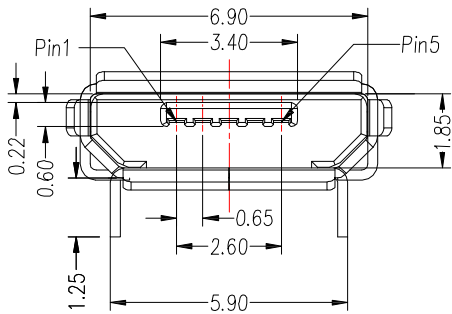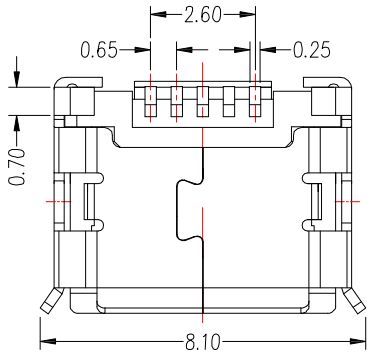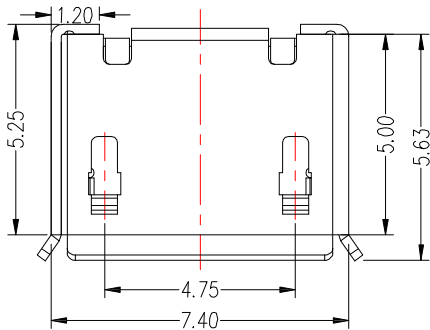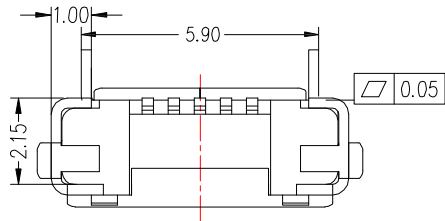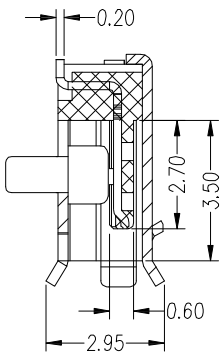

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

1.1 HOUSING: LCP,UL94V-0

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: COPPER ALLOY

Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls

Nickel under plated overall

2.2 Shell: Nickel or Tin under Plated surface layer

3.SPECIFICATION:

3.1 CURRENT RATING: 1.0 A

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min

3.3 CONTACT RESISTANCE: 50 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.

3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.

3.7 TEMPERATURE RANGE: -30°C ~ +80°C



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 02/27/19
DATE: 02/27/19
DATE: 02/27/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

MICRO USB 5BF 前插(5.65)後貼無柱

MRUSB-5B-D5x-S347

MRUSB-5B-D5x-S347

SIZE

A4

VER

R1

1	更新底部樣式	Jack	022719
ITEM NO.	DESCRIPTION	DRAWN	DATE