


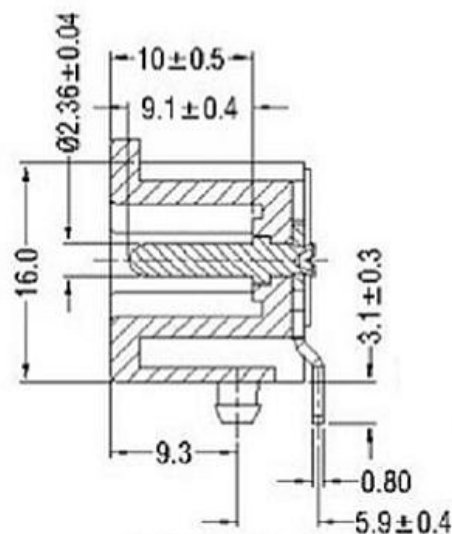


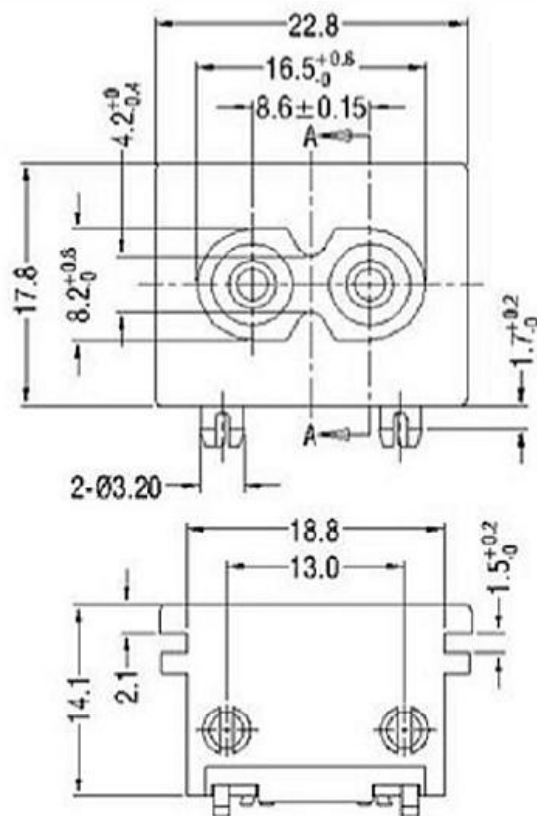



SECTION: A-A



MARK

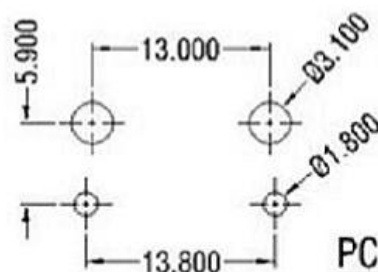

PCB LAYOUT

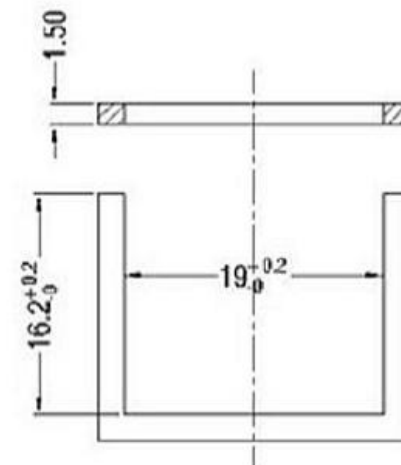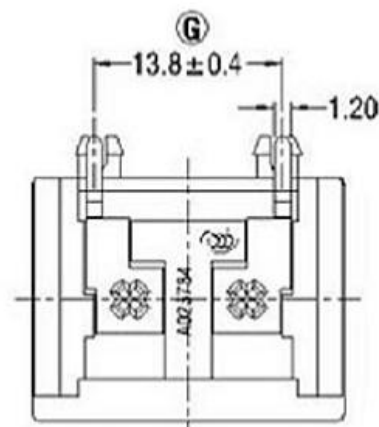

PANLE CUT-OUT

SPEC:

A. Material:

1. Housing: PA66

2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

1. Rating: 2.5A 250V~

(UL, CUL, CCC, VDE, SEMKO, NEMKO, FMKO, DEMKO)

2. Electric Strength: AC 2,000 V FOR ONE MINUTE

3. Insulation Resistance: 100MΩ MIN, AT 500VDC

C. Approvals:

UL, CUL, CCC, VDE, SEMKO, NEMKO, FMKO, DEMKO

普通公差

COMMON TOLERANCE:

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°

单位	mm
绘图	林晓良
日期	19. 08. 12



东莞市高迪电子有限公司

REV.	DATE	REVISION DESCRIPTION	ISSUE	品名	AC POWER JACK
				型号	
				料号	KD-AC电源插座