
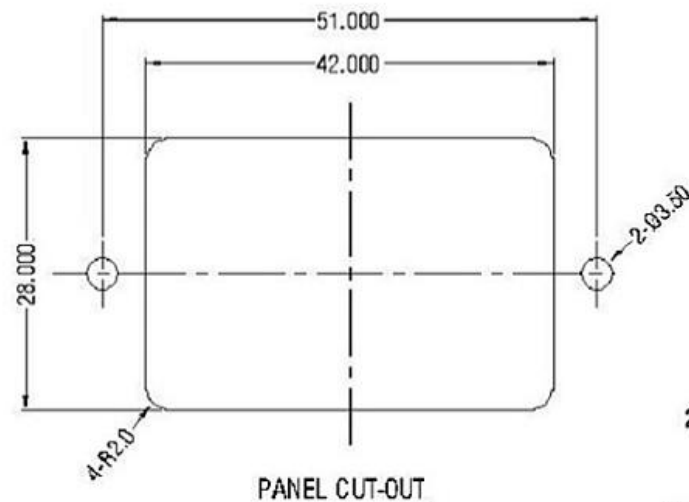


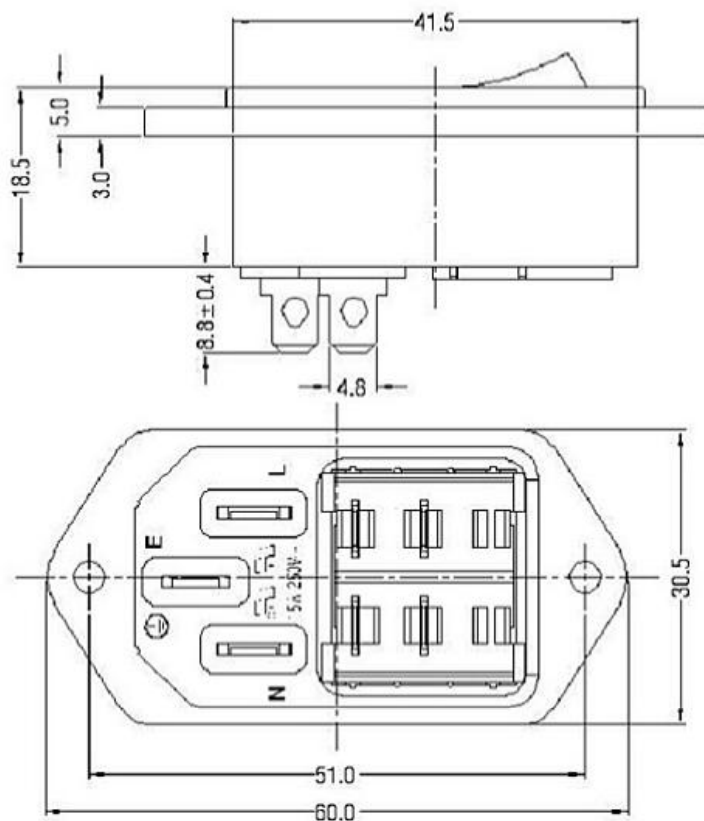

SPEC:

A. Material:

1. Housing: PA66

2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

1. Rating: 15A 250V~ (UL, CUL)



10A 250V~ (CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO)

2. Electric Strength: AC 2,000 V FOR ONE MINUTE

3. Insulation Resistance: 100MΩ MIN, AT 500V DC

C. Approvals:

UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO

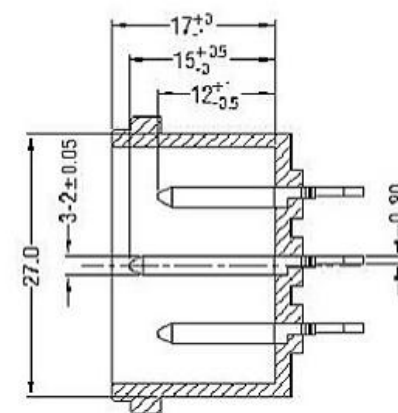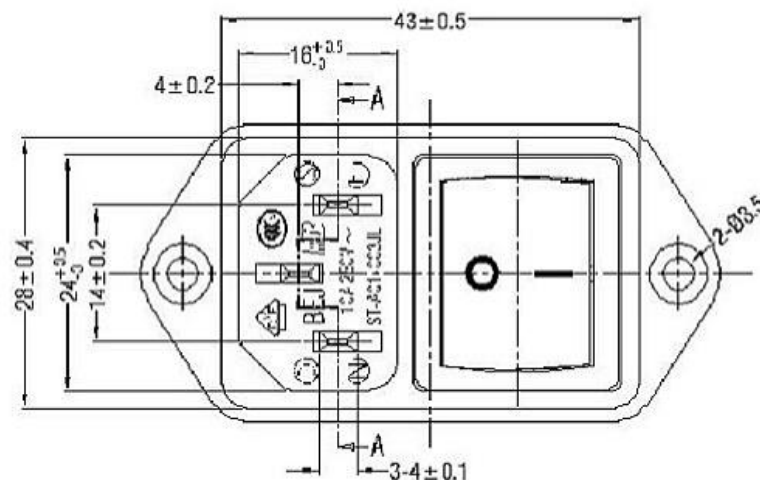

SECTION: A-A

普通公差

COMMON TOLERANCE :

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°



东莞市高迪电子有限公司

REV.	DATE	REVISION DESCRIPTION	ISSUE	UNIT	mm	投影	品名
				UNIT		PROJECTED	AC POWER JACK
				绘图	林晓良	核对应	型号
				DRAWN BY		CHECKED BY	MODEL NO.
				日期	19. 08. 12	核准	料号
				DATE		APPROVAL BY	PART NO.

KD-AC电源插座