

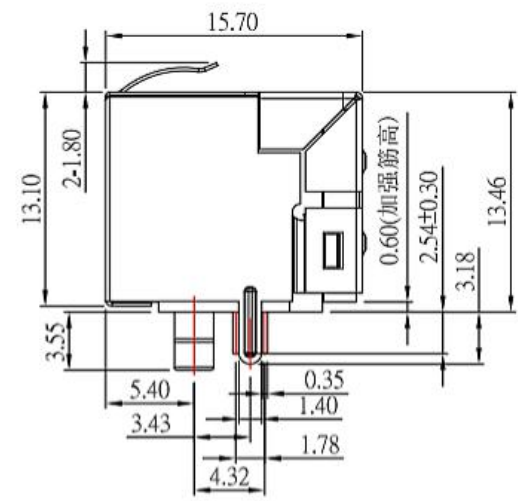


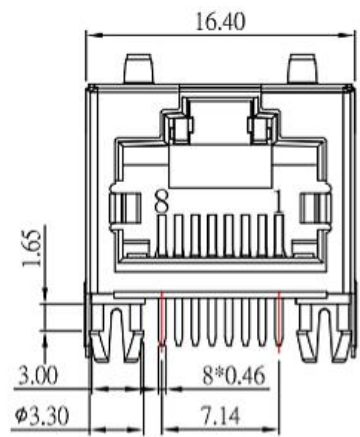



RJ45-41213-x-S118

鍍層厚度:

Blank	: 1u"
1	: 3u"
2	: 15u"
3	: 30u"
5	: 60u"
6	: 80u"

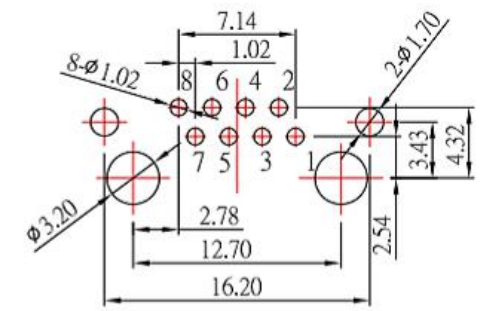

P.C.B LAYOUT

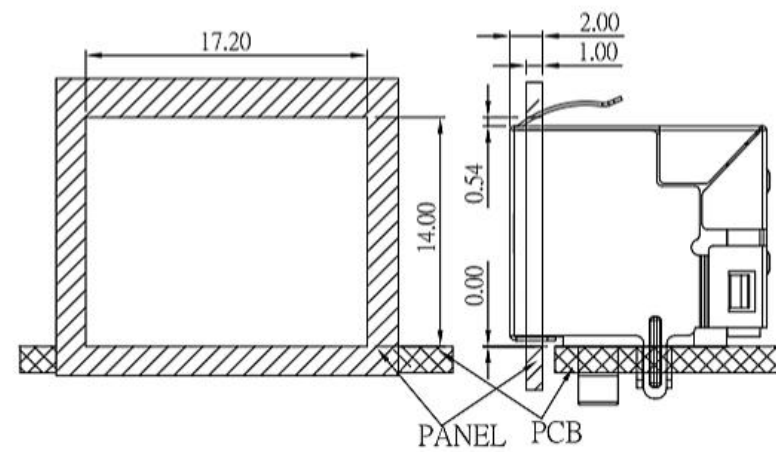

PANEL PCB
Recommended panel cutout

- NOTE:
- 1.Housing:PA46, Black
 - 2.Insert: PBT, Black
 - 3.Contact: Phosphor Bronze, Gold Plating Over Nickel
 - 4.Shielding: Brass,Nickel Plated



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2	Above 5 ~ 15 ±0.3	Above 15 ~ 30 ±0.4	Above 30 ~ 50 ±0.5	Angle ±0.3°
	3RD.	ANGEL'S	UNITS	MM	

DRAWN BY:	Jack Lu	DATE	10/13/21	MAT'L		TITLE	RJ45
CHECKED BY:	Jacky Chen	DATE	10/13/21	FINISH		MODLE	RJ45
APPROVED BY:	Tony Kao	DATE	10/13/21	SCALE	1 : 1	DWG NO.	RJ45-41213-x-S118
				SHEET NO.	2 of 1	PART NO.	RJ45-41213-x-S118
							SIZE A4
							VER R1