

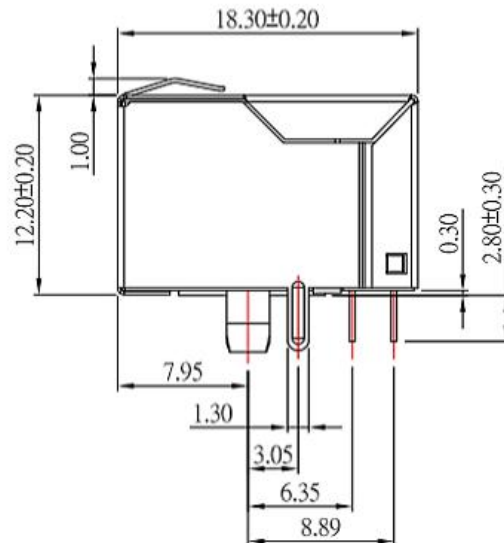
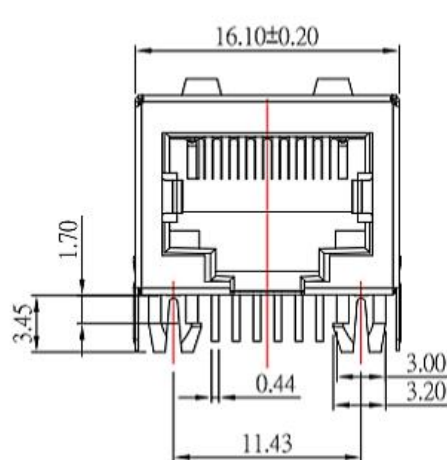
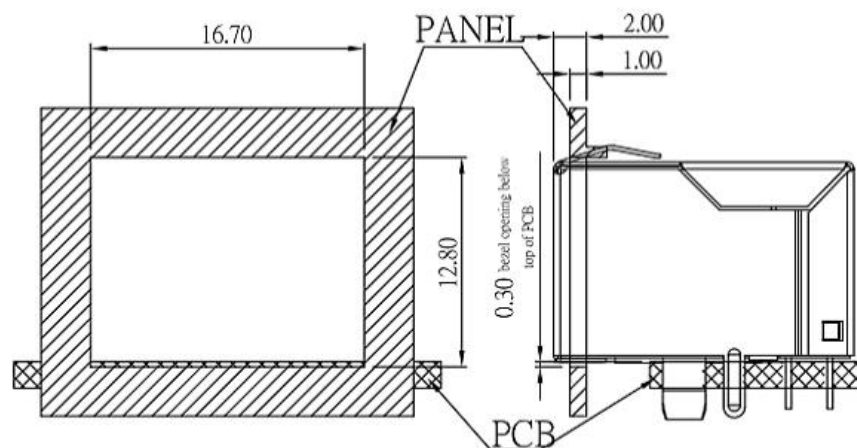


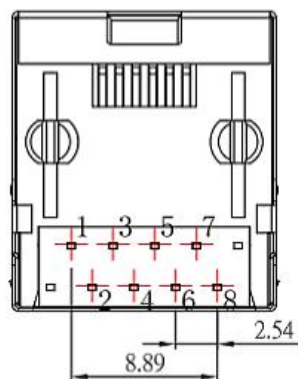

RJ45-41804-x-S118

鍍層厚度:

Blank	: 1u"
1	: 3u"
2	: 15u"
3	: 30u"
5	: 60u"
6	: 80u"

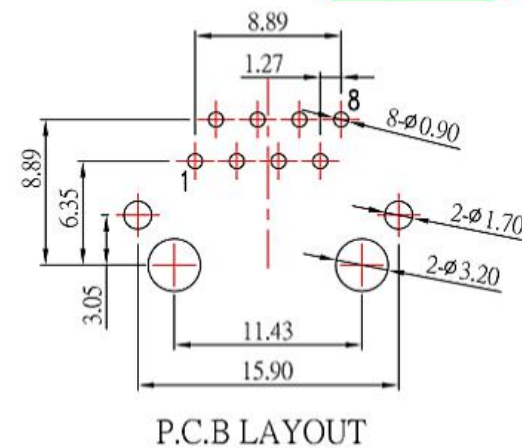

Recommended panel cutout

NOTE:

- 1.Housing:PA46, Black
- 2.Insert: PBT, Black
- 3.Contact: Phosphor Bronze, Gold Plating Over Nickel
- 4.Shielding: Copper Alloy,Nickel Plated



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
06/22/21

CHECKED BY:
Jacky Chen

DATE
06/22/21

APPROVED BY:
Tony Kao

DATE
06/22/21

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

RJ45

RJ45

RJ45-41804-x-S118

RJ45-41804-x-S118

SIZE

A4

VER

R

ITEM NO. DESCRIPTION DRAWN DATE