
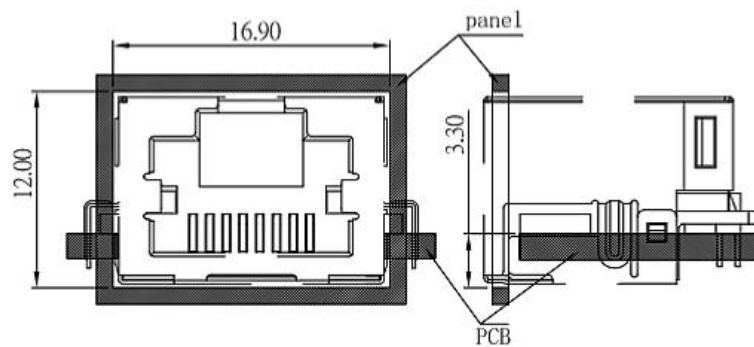

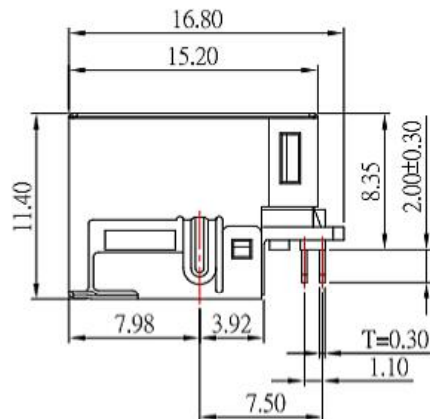
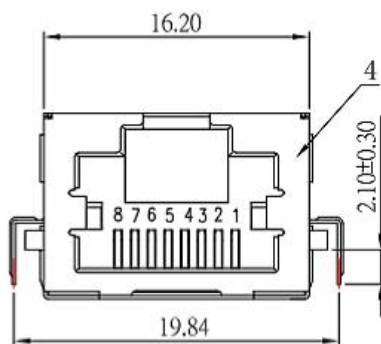



RJ45-41933-x-S118

鍍層厚度:

Blank:	1u"
1:	30"
2:	15u"
3:	30u"
5:	6u"



Recommended panel cutout.

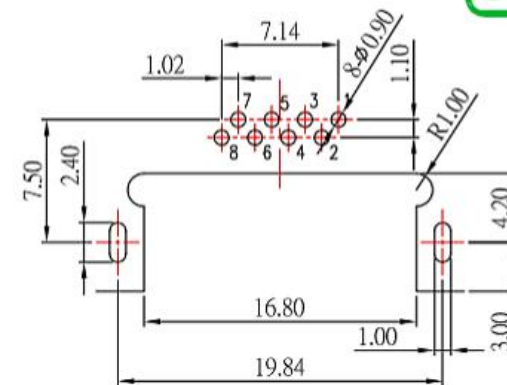

P.C.B LAYOUT
TOP VIEW

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
6. OPERATING: 750 CYCLES MIN.

MATERIALS:

1. Housing: LCP BLACK
2. Cover: LCP BLACK
3. Shielding: Copper Alloy with Nickel Plated.
4. Contact: Phosphor Bronze gold Plating Over Nickel.

ENVIRONMENTAL:

1. STORAGE: -40° C TO +85° C.
2. OPERATION : -40° C TO +85° C.



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.5°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	07/08/21
CHECKED BY:	DATE
Jacky Chen	07/08/21
APPROVED BY:	DATE
Tony Kao	07/08/21

MAT'L		TITLE	RJ45
FINISH		MODLE	RJ45
SCALE	1 : 1	DWG NO.	RJ45-41933-x-S118
SHEET NO.	2 of 1	PART NO.	RJ45-41933-x-S118

SIZE	A4
VER	R