









MRUSB-5AB-x-S347

SHELL鍍層:



TN

NI

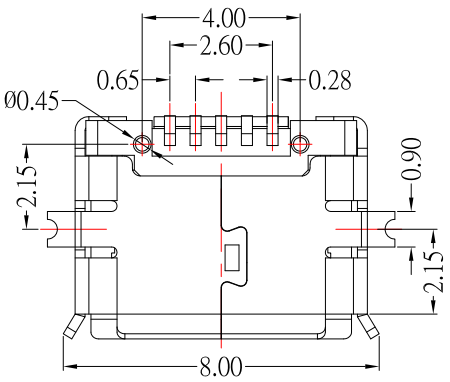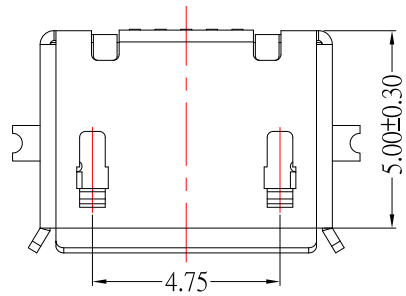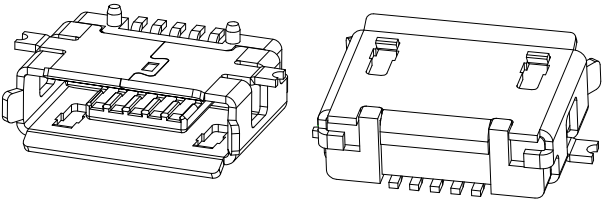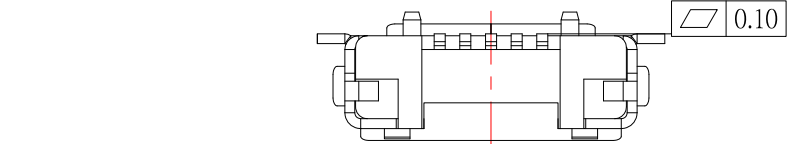

- NOTES:
- MATERIAL:
- 1.1 HOUSING: LCP,
 - 1.2 CONTACT: PHOSPHOR BRONZE
 - 1.3 SHELL: BRASS
- Finish:
- 2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls
Nickel under plated overall
 - 2.2 Shell: Nickel or Tin under Plated surface layer

- 3.SPECIFICATION:
- 3.1 CURRENT RATING: 1.8A(PIN1&5) , 1.0 A(PIN2&3&4) MAX
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min
 - 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
 - 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
 - 3.5 TOTAL MATING FORCE: 3.57 KgF MAX.
 - 3.6 TOTAL UNMATING FORCE: 1.0 KgF MIN.
 - 3.7 TEMPERATURE RANGE: -30°C ~ +80°C

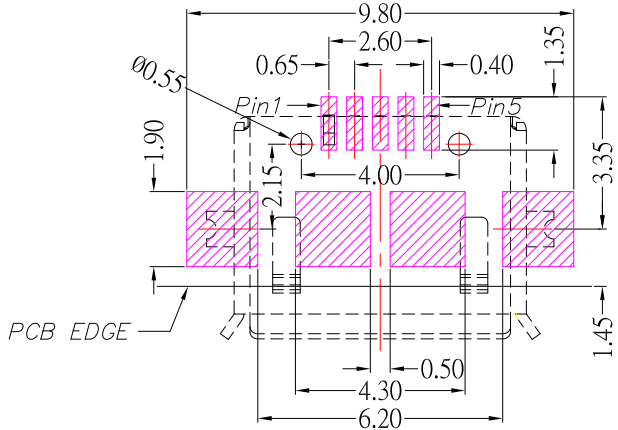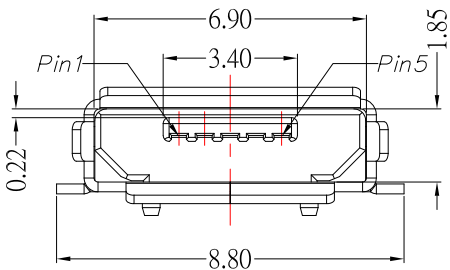

P.C.B LAYOUT MOUNTING PATTERN



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/07/16
DATE: 11/07/16
DATE: 11/07/16

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	MICRO USB 5PIN AB TYPE 全帖有柱
SCALE	1 : 1	DWG NO. MRUSB-5AB-x-S347
SHEET NO.	1 of 1	PART NO. MRUSB-5AB-x-S347

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	110716