


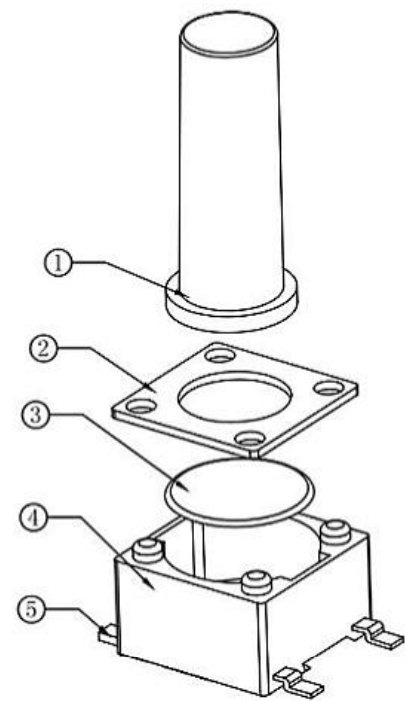
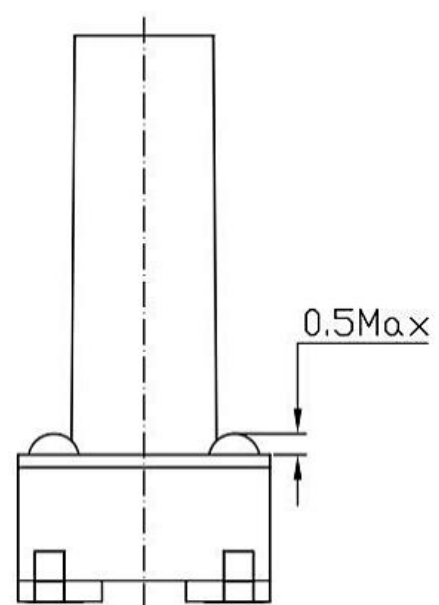
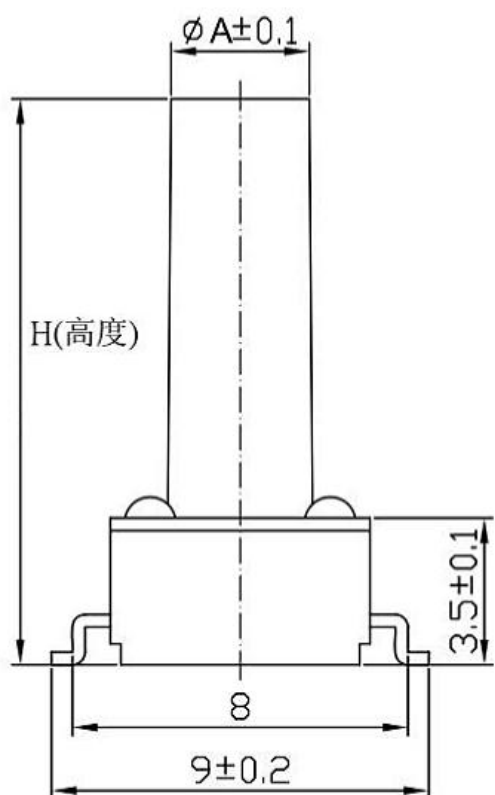




A	H(高度)
$\phi 3.5$	4.3
$\phi 3.5$	5.0
$\phi 3.3$	6.5
$\phi 3.3$	8.0
$\phi 3.2$	9.5
$\phi 3.0$	13
$\phi 3.0$	20.5

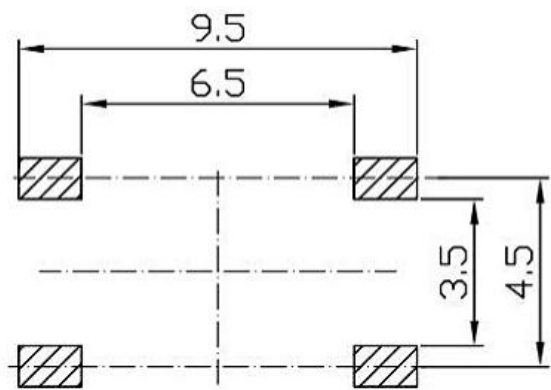

电路图

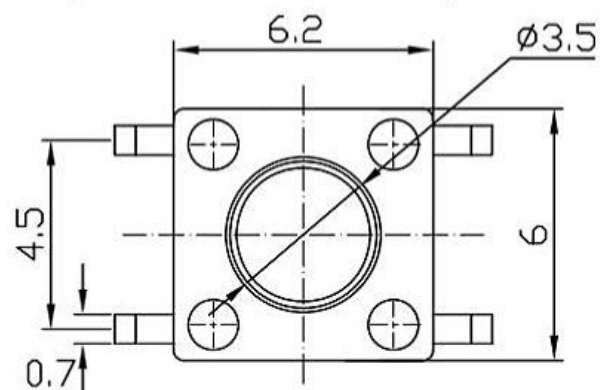

PCB线路板安装图(±0.1)

SPECIFICATIONS

Rating	DC 12V 50mA.
Insulation Resistance	50 MΩ Min.
Contact Resistance	100 mΩ Max.
Operating Force	2 160 ± 50gf 3 260 ± 50gf
Operating Life (cycles)	50,000

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	PA6T	Black
A	STEM	1	PPA	White
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

7	新增尺寸	Jack	010318
6	更新画面尺寸	Jack	112317
5	更新PCB LAYOUT模式及尺寸	Jack	020317
4	更新PCB LAYOUT模式	Jack	011717
3	更新SPEC及材質	Jack	061515
2	更新尺寸標示	Jack	050615
1	新增PIN編號	Jack	020315
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 01/03/18
DATE: 01/03/18
DATE: 01/03/18

MAT'L
FINISH
SCALE
SHEET NO.

TITLE: SWITCH
MODE: TACT SWITCH
DWG NO.
PART NO.
SIZE: A4
VER: R7