

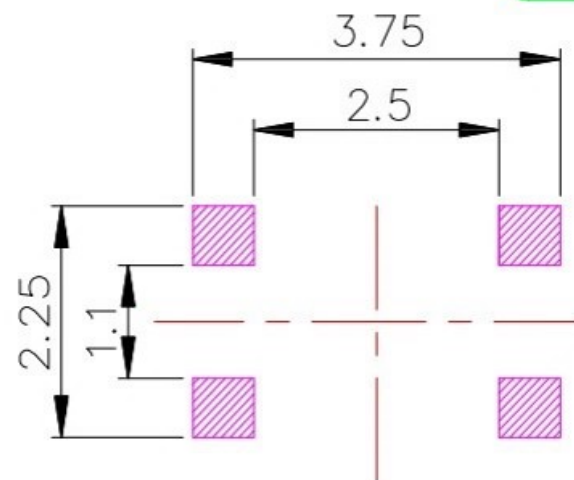

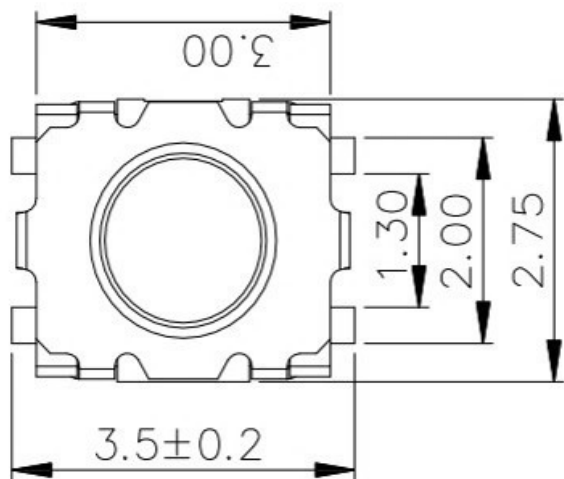




PCB LAYOUT

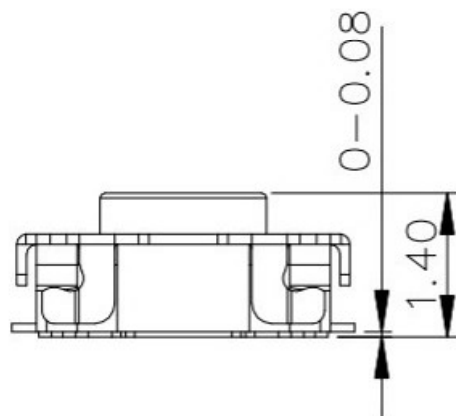

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 15V 20mA.		
Contact Resistance	500 mΩ Max.		
Operating Force	2	160 ± 50gf	3 260 ± 50gf
Operating Life (cycles)	100,000		

E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	BASE	1	LCP	
C	CONTACT	1	SUS	Ag plated
B	COVER	1	SUS	
A	STEM	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

06/15/18

CHECKED BY:

Jacky Chen

DATE

06/15/18

APPROVED BY:

Tony Kao

DATE

06/15/18

MAT'L

FINISH

SCALE

1 : 1

SHEET NO.

1 of 1

TITLE

SWITCH

MODLE

TACT SWITCH

DWG NO.

TS-A82-x-S138

PART NO.

TS-A82-x-S138

SIZE

A4

VER

R