

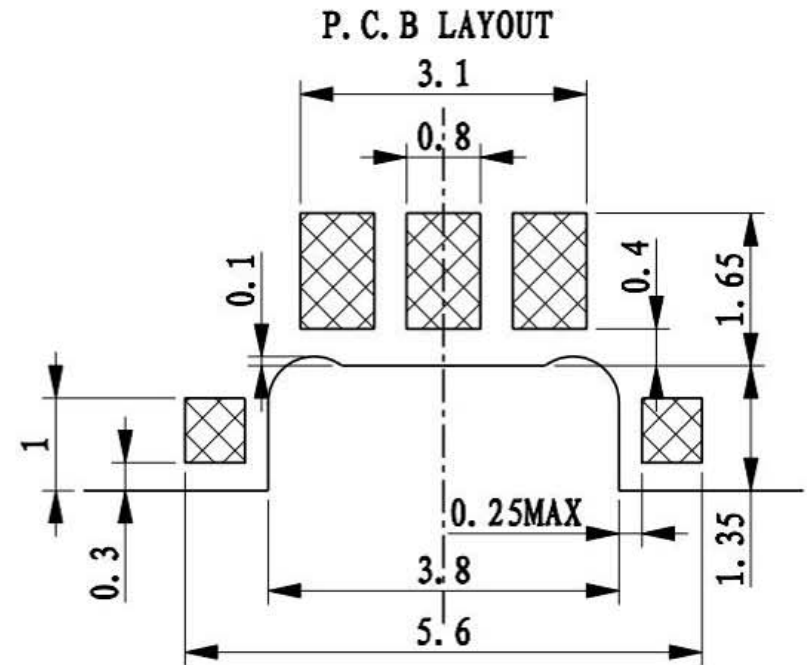
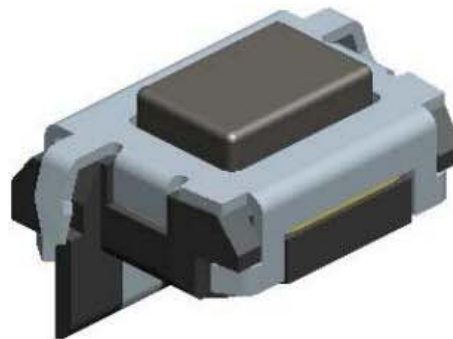

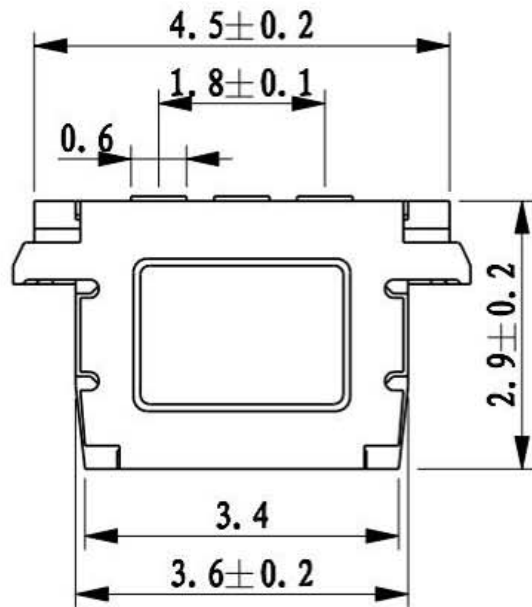


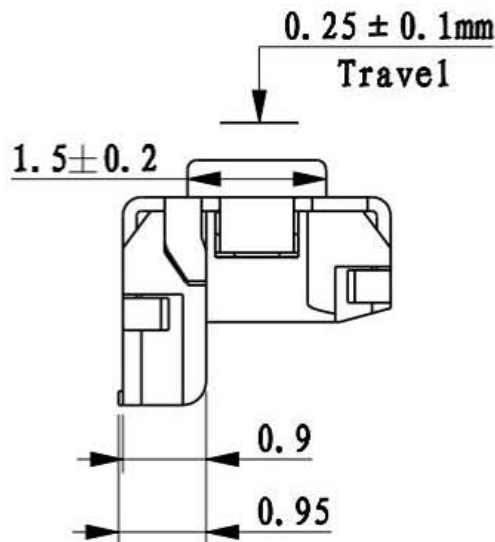

SPECIFICATIONS

Rating	DC 12V 50mA.		
Insulation Resistance	50 MΩ Min.		
Contact Resistance	100 mΩ Max.		
Operating Force	2	160 ± 50gf	3 260 ± 50gf
Operating Life (cycles)	50,000		

7	新增尺寸	Jack	010918
6	更新侧面尺寸	Jack	112317
5	更新PCB LAYOUT模式及尺寸	Jack	020917
4	更新PCB LAYOUT模式	Jack	011717
3	更新SPEC及材质	Jack	061515
2	更新尺寸标示	Jack	050615
1	新增PIN编号	Jack	020915
ITEM NO.	DESCRIPTION	DRAWN	DATE

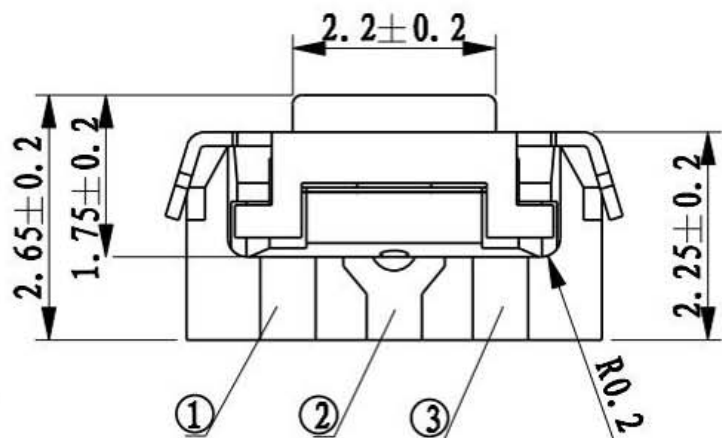

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

01/03/18

CHECKED BY:

Jacky Chen

DATE

01/03/18

APPROVED BY:

Tony Kao

DATE

01/03/18

MAT'L

FINISH

SCALE

1 : 1

TITLE

SWITCH

MODLE

TACT SWITCH

DWG NO.


PART NO.

SIZE


A4

VER


R7

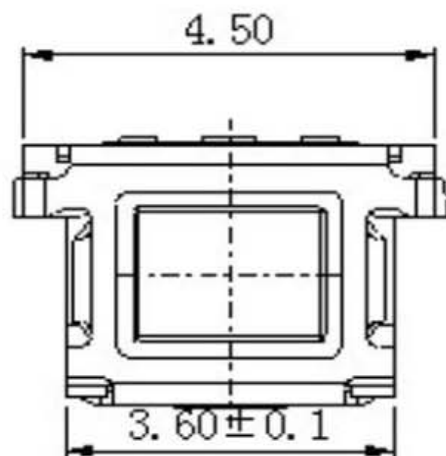

CIRCUIT DIAGRAM

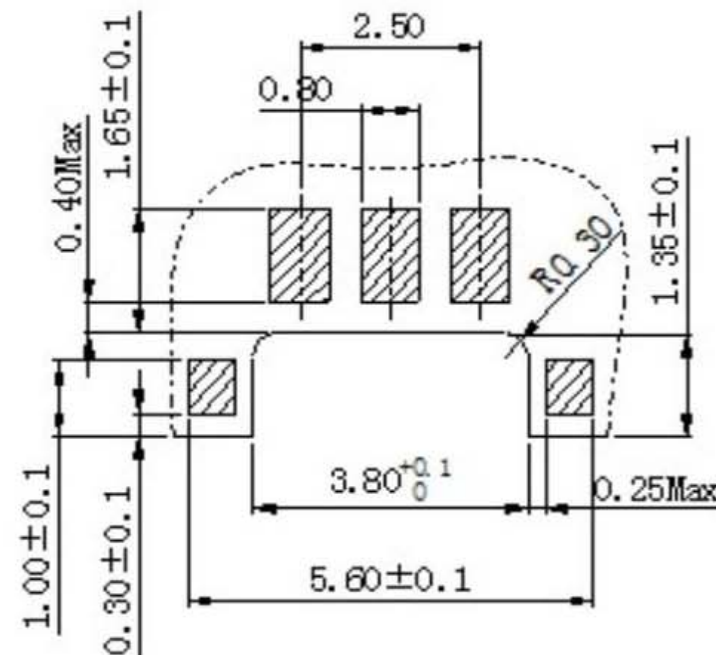

P.C.B LAND DIMENSION

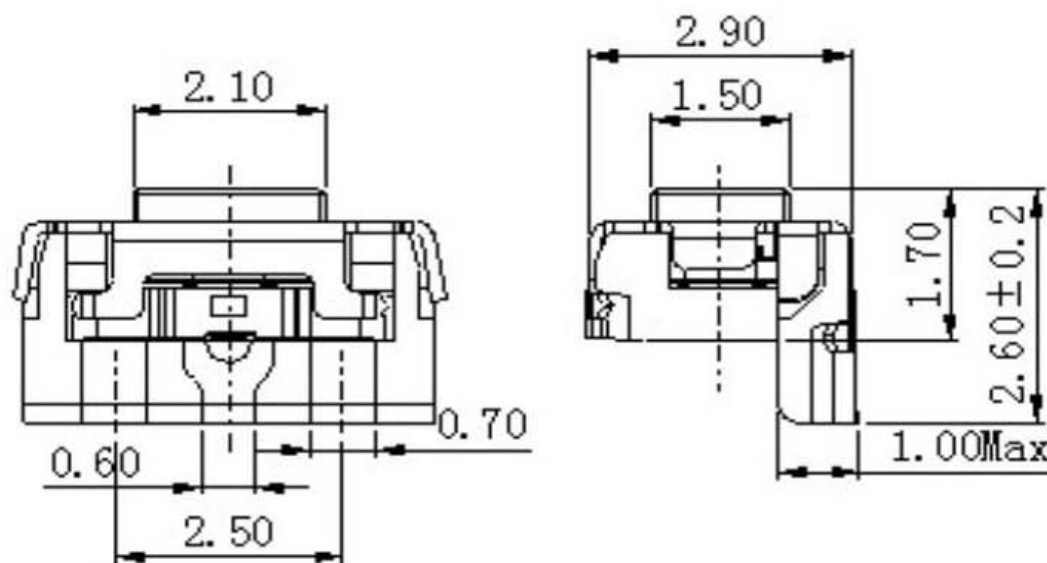

SPECIFICATIONS

Rating	DC 12V 50mA.		
Insulation Resistance	50 MΩ Min.		
Contact Resistance	100 mΩ Max.		
Operating Force	2	160 ± 50gf	3 260 ± 50gf
Operating Life (cycles)	50,000		

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	PA6T	Black
A	STEM	1	PPA	White
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

7	新增尺寸	Jack	010918
6	更新画面尺寸	Jack	112317
5	更新PCB LAYOUT模式及尺寸	Jack	020917
4	更新PCB LAYOUT模式	Jack	011717
3	更新SPEC及材質	Jack	061515
2	更新尺寸標示	Jack	050615
1	新增PIN編號	Jack	020915
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	01/03/18			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	01/03/18			
APPROVED BY:	DATE	SCALE	DWG NO.	
Tony Kao	01/03/18	1 : 1		
		SHEET NO.	PART NO.	
		1 of 1		
				SIZE A4 VER R7