
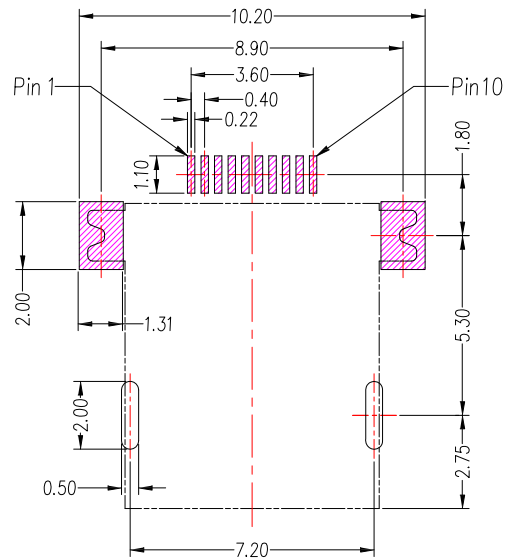


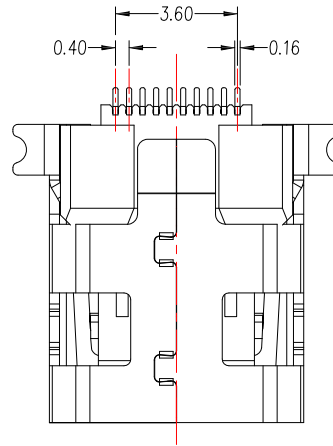



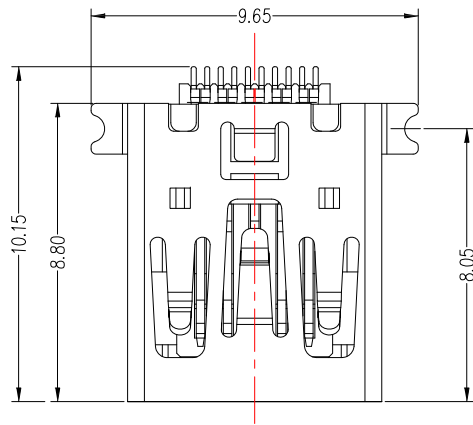

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Current Rating: 0.5 Amperes
- 2.Contact Resistance: 50 mΩ Max
- 3.Dielectric Withstanding Voltage: AC 100 V
- 4.Insulation Resistance: 100 MΩ Min
- 5.Operating Temperature: -25°C ~ 65°C

Material:

- 1.Housing: High Temperature Thermal Plastics,UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: Phosphor Bronze

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 06/23/15
DATE: 06/23/15
DATE: 06/23/15

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	MINI USB AB 型 前插後貼無柱
SCALE	DWG NO.	MUSB-10P-SD1-S165
SHEET NO.	PART NO.	MUSB-10P-SD1-S165

SIZE
A4
VER
R