


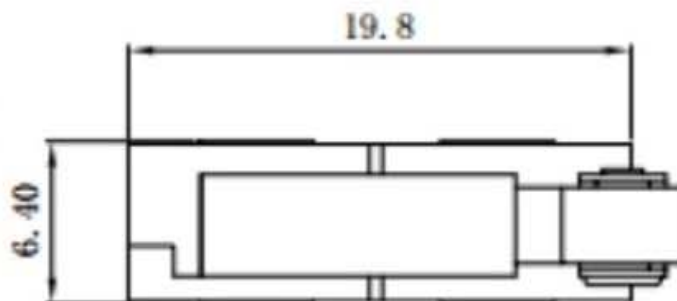


CAD FILE:

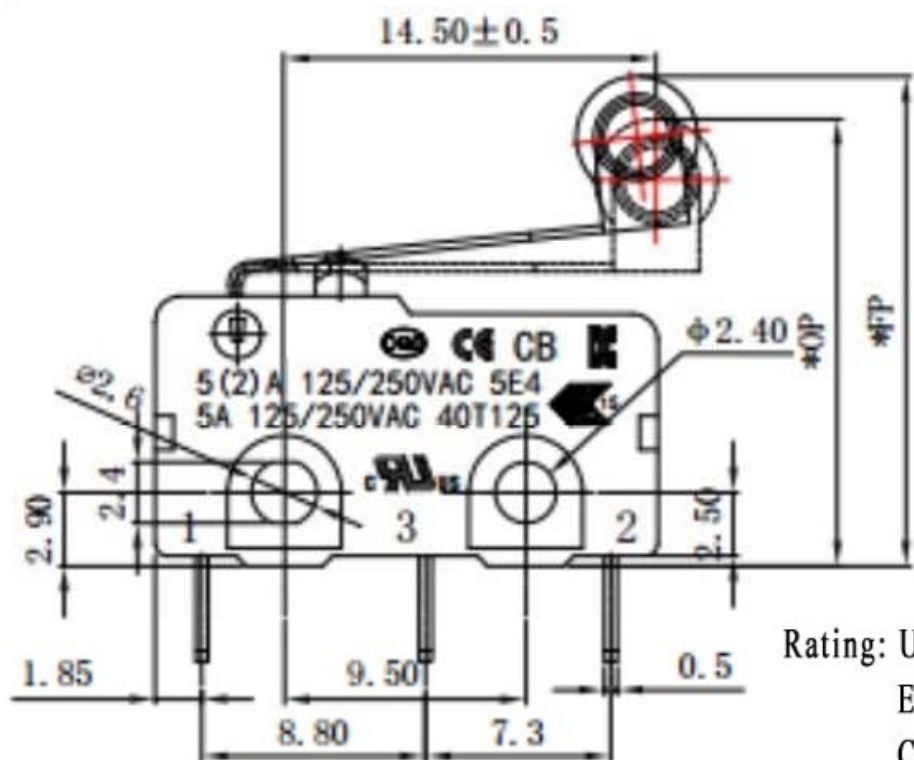

SCHEMATIC (NON-SHORTING)

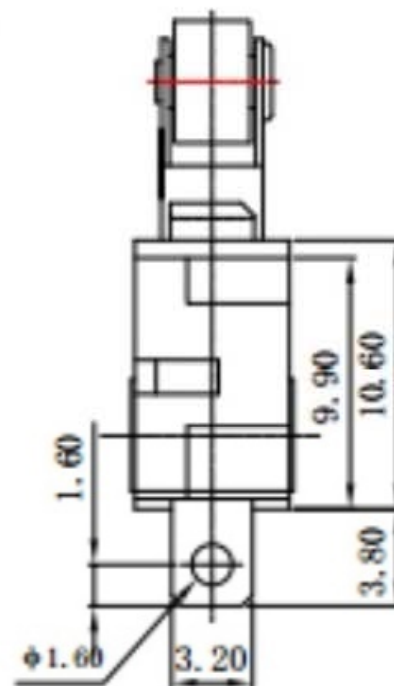

Rating: UL/CUL: 5A 125/250VAC 1/2 HP 40T125
 ENEC, KC: 5(2)A 125/250VAC 40T125
 CQC: 5(2)A 125/250VAC 40T125 PTI175

Electrial life: 50000 cycles

Mechanical life: 1000000 cycles

IP code: IP40

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : ±0.1mm	A		初版	
6	CONTACT	AG	1	NATURAL	OVER 1.5mm : ±0.2mm				
5	SHRAPNEL	PBS	1	NATURAL					
4	KNOB	PA9T	1	BLACK					
3	COVER	PA66	1	BLACK					
2	BASE	PA9T	1	BLACK					
1	TERMINAL	BRASS STRIP	3	Ag PLATED					
					TITLE : MICRO SWITCH			UNIT : mm	DRWG NO.:
					MODEL:			SCALE: 3:1	
					東莞市高迪電子有限公司			DWN. 刘工	2008.6.8
								CHK'D 戴海明	2008.6.8
								APPD. 林小姐	2008.6.8