

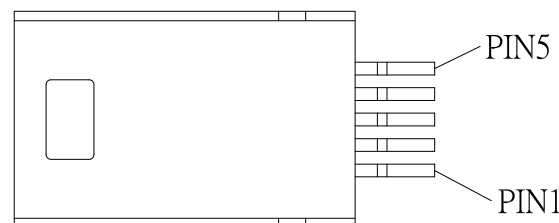
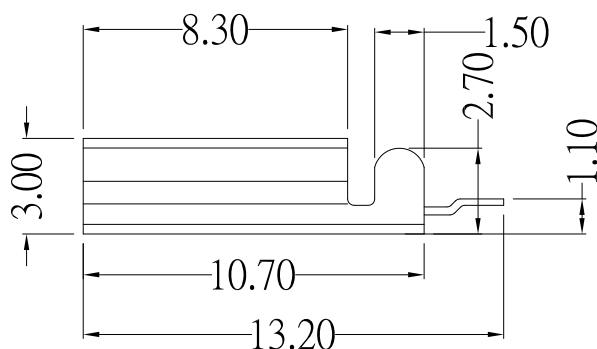


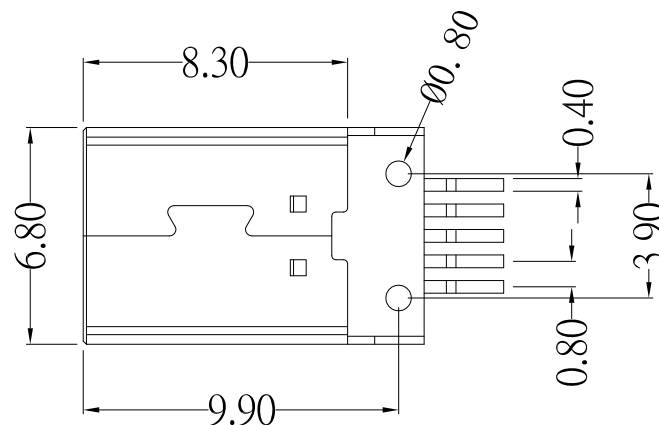


MUSB-5PLM1-x-S235

鍍層厚度:

Blank : 1u"
3 : 30u"

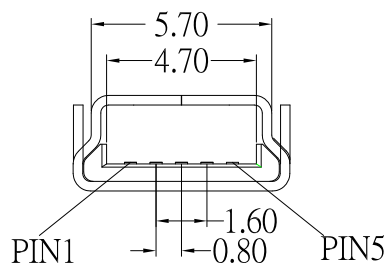

PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	ID
PIN5	GND

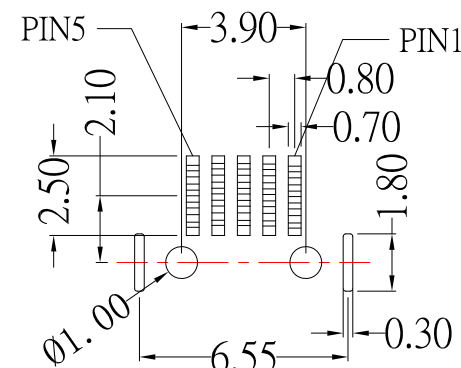

PCB LAYOUT

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.0A
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 50 mΩ Max
- 4.Dielectric Withstanding Voltage: 100 V DC / minute
- 5.Insulation Resistance: 100 MΩ Min

MATERIAL:

- 1.1 Housing: LCP ,UL94V-0
- 1.2 Contact: BRASS
- 1.3 Shell: SPCC

Finish:

- 2.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.2 Shell: Nickel under Plated surface layer

8	更新PCB LAYOUT尺寸	Jack	042018
7	新增尺寸	Jack	032918
6	新增PIN編號及定義	Jack	050217
5	更新外型樣式及新增PCB LAYOUT尺寸	Jack	040517
4	新增尺寸	Jack	031717
3	新增鍍層厚度選項	Jack	031317
2	更新圖面	Jack	121216
1	新增PCB LAYOUT	Jack	040816
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	04/20/18				
CHECKED BY:	DATE	FINISH		MODLE	MINI USB 5P
Jacky Chen	04/20/18				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	MUSB-5PLM1-x-S235
Tony Kao	04/20/18	SHEET NO.	1 of 1	PART NO.	MUSB-5PLM1-x-S235
					SIZE A4
					VER R8