

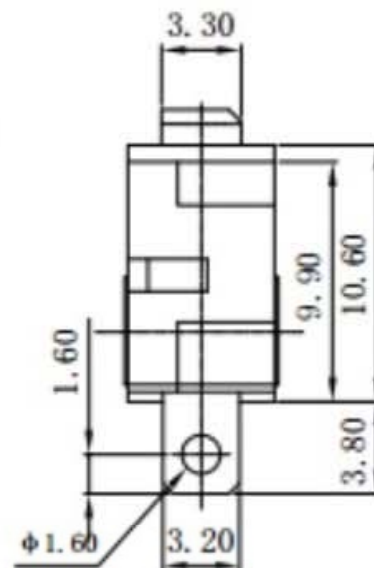
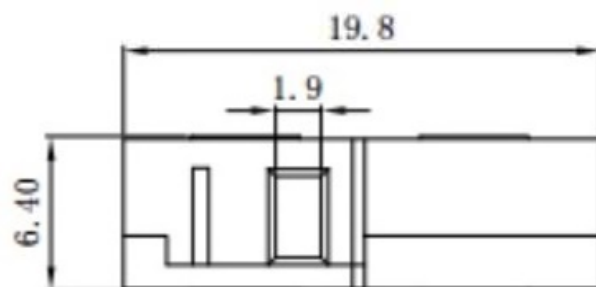


CAD FILE:

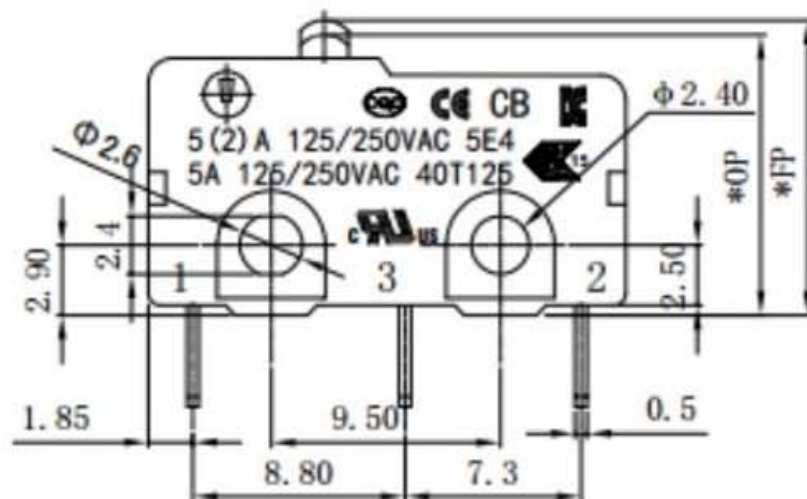

SCHEMATIC (NON-SHORTING)

Rating: UL/CUL: 5A 125/250VAC 1/2 HP 40T125

ENEC, KC: 5(2)A 125/250VAC 40T125

CQC: 5(2)A 125/250VAC 40T125 PTI175

Electrical life: 50000 cycles

Mechanical life: 1000000 cycles

IP code: IP40

注: "*"口表示关键尺寸(4个).

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED				
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : ±0.1mm	A			
6	CONTACT	AG	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE	初版	
5	SHRAPNEL	PBS	1	NATURAL	DESCRIPTIONS OF REVISION				
4	KNOB	PA9T	1	BLACK	APPD.				
3	COVER	PA66	1	BLACK	TITLE : MICRO SWITCH				
2	BASE	PA9T	1	BLACK	MODEL:				
1	TERMINAL	BRASS STRIP	3	Ag PLATED	UNIT : mm				
					SCALE: 3:1				
					DRWG NO.:				
					DWN. 刘工 2008.6.8				
					CHK'D 戴海明 2008.6.8				
					APPD. 林小姐 2008.6.8				

东莞市高迪电子有限公司