

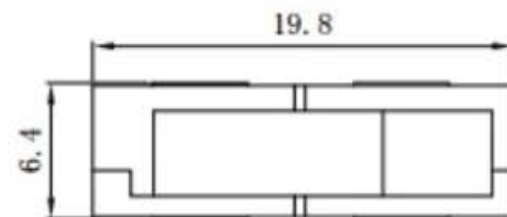
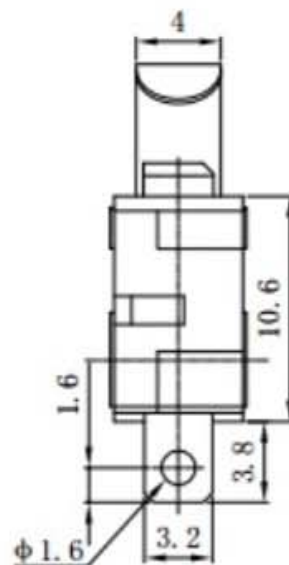


CAD FILE:

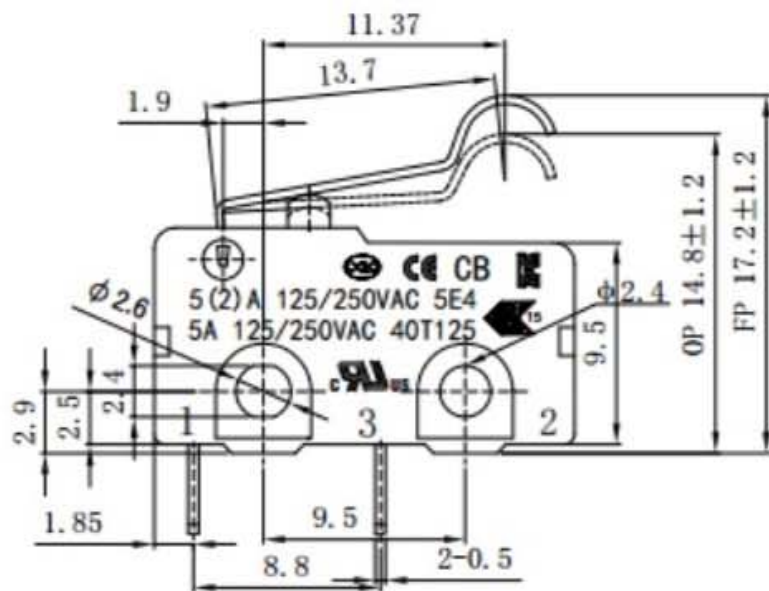

SCHEMATIC (NON-SHORTING)

Rating: UL/CUL: 5A 125/250VAC 1/2 HP 40T125
 ENEC, KC: 5(2)A 125/250VAC 40T125
 CQC: 5(2)A 125/250VAC 40T125 PTI175

Electrical life: 50000 cycles

Mechanical life: 1000000 cycles

IP code: IP40

注: "*"□表示关键尺寸(4个).

					TOLERANCE UNLESS SPECIFIED									
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A		初 版						
6	CONTACT	AG	1	NATURAL		ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.			
5	SHRAPNEL	PBS	1	NATURAL										
4	KNOE	PA9T	1	BLACK	TITLE : MICRO SWITCH			UNIT : mm	DRWG NO.:					
3	COVER	PA66	1	BLACK	MODEL:			SCALE: 3:1						
2	BASE	PA9T	1	BLACK	東莞市高迪電子有限公司							DWN.	刘工	2008.6.8
1	TERMINAL	BRASS STRIP	3	Ag PLATED								CHK'D	戴海明	2008.6.8
NO.	PARTS	MATERIALS	Q'TY	FINISH								APPD.	林小姐	2008.6.8