

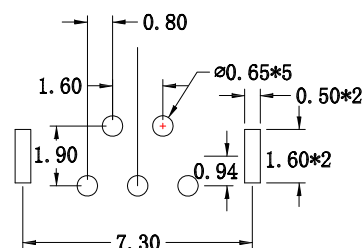
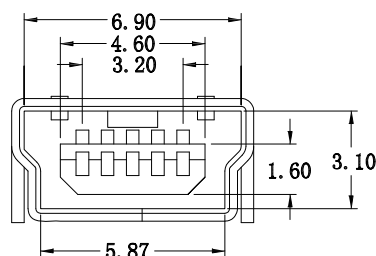
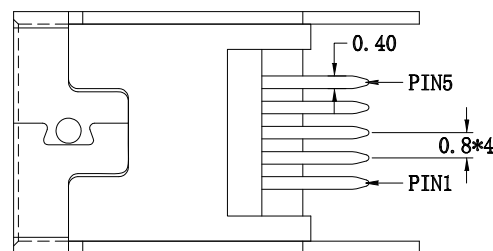


3 : 30u"

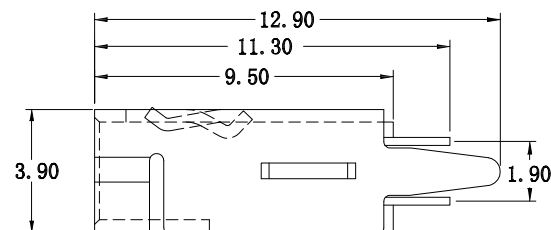

P.C.B LAYOUT MOUNTING PATTERN

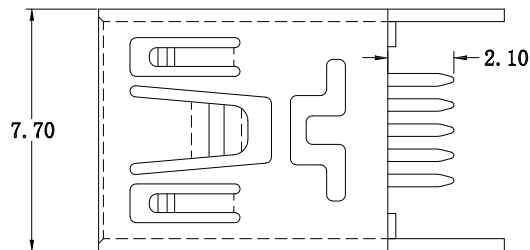

Electrical :

- 1.Current Rating : 1.0A / contact terminal
- 2.Voltage Rating : 30V DC
- 3.Contact Resistance : 50 mΩ Max
- 4.Dielectric Withstanding Voltage :
300 V AC AT Sec Level
- 5.Insulation Resistance : 100 MΩ Min

Mechanical :

- 1.Connector Mate and Unmate Force
Mate force : 3.0 kgf (Max)
Unmate force : 0.7 kgf (Min)
- 2.Terminal Retention : 0.5 kgf (Min)

Material :

- 1.Housing :
High Temperature Thermal Plastics,
UL 94V-0 , LCP , Black
- 2.Contact : PHOSPHOR BRONZE / BRASS
- 3.Shell : BRASS

Finish :

- 1.Contact : Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell : Nickel under Plated surface layer



Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.



UNITS

MM

DRAWN BY:	DATE
Jack Lu	11/04/13

CHECKED BY:	DATE
Jacky Chen	11/04/13

APPROVED BY:	DATE
Tony Kao	11/04/13

MATL.

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG N°

PART N

CONNECTOR

MINI USB 5B/F 180 度 DIP 直插腳

D. MUSB-5B-VD-x-S175

0 MUISC 5P VD_r S175

	SIZE
	A4
	VER
	D