



SUA-210H-x-S175

Color
White : W
Black : B





NOTE:

1.MATERIAL:

- a.HOUSING:PBT GLASS FIBRE UL94 V-0 ;
b.CONTACT: PHOSPHOR BRONZE ;
(SURFACE PLATING: Au + Sn + Ni)
c.SHEEL: SPCC ;
(SURFACE PLATING: Cu / Ni)

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1,000 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE MIN LEVEL
d.OPERATING TEMPERATURE: -55°C~ 85°C

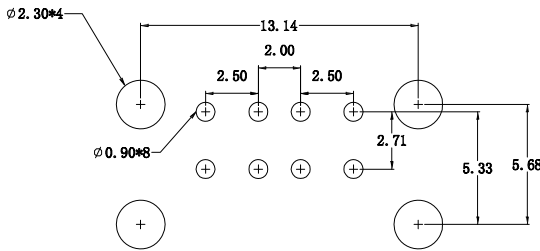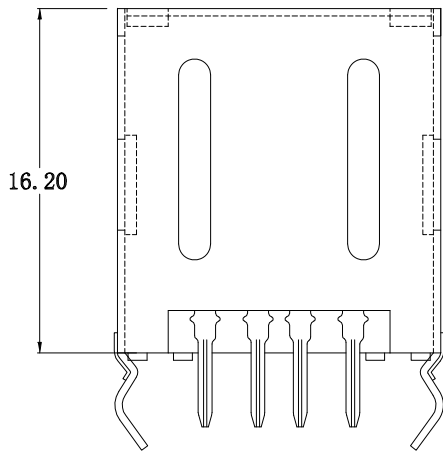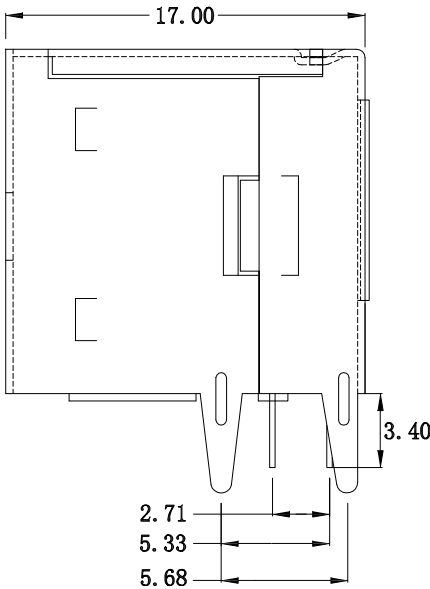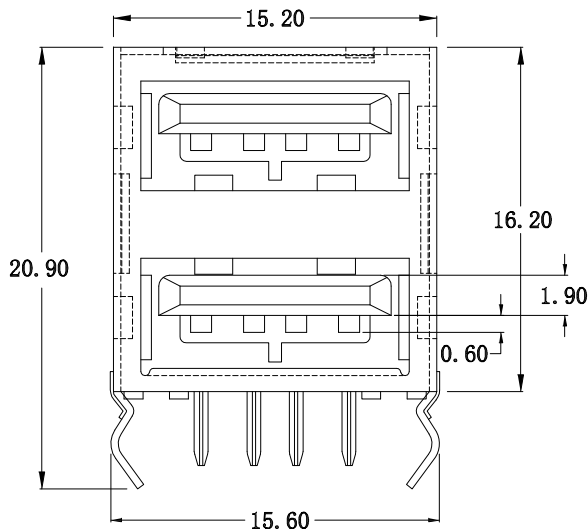

P.C.B LAYOUT MOUNTING PATTERN



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

10/11/12

CHECKED BY:

Jacky Chen

DATE

10/11/12

APPROVED BY:

Tony Kao

DATE

10/11/12

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB AF 雙層全包

SUA-210H-x-S175

SUA-210H-x-S175

SIZE

A4

VER

R