



SUA-110V16x-x-S235

SHELL :

Blank : Brass

I : SPCC

COLOR :

Black: B

White : W

SPECIFICATIONS

Electrical:





- 1.Rating: 30V DC, 1.5A
- 2.Contact Resistance: 30 mΩ Max
- 3.Dielectric Withstanding Voltage: 500 V AC / 1 minute
- 4.Insulation Resistance: 1,000 MΩ Min

Material:

- 1.Housing: PBT, UL 94V-0
- 2.Contact: Brass
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

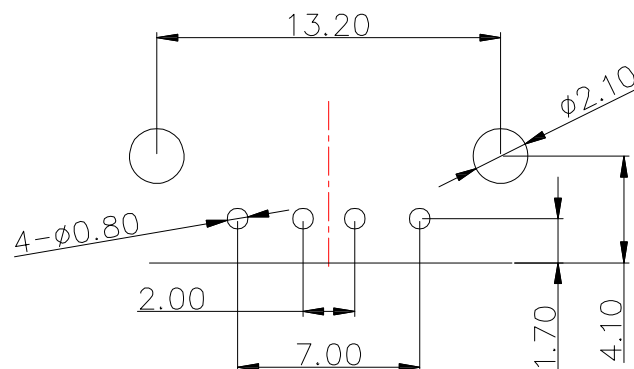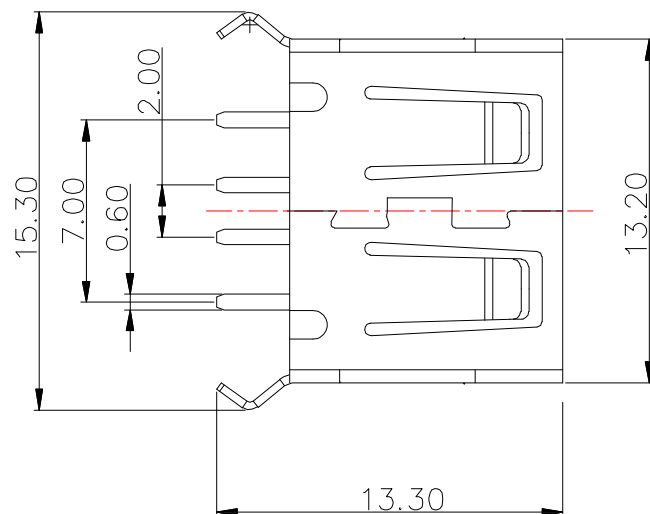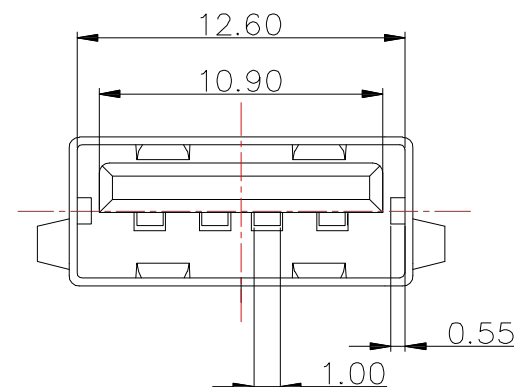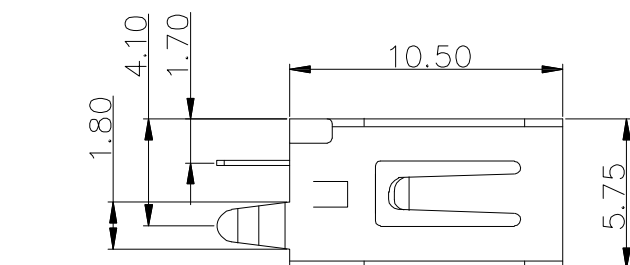

P.C.B LAYOUT MOUNTING PATTERN



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
05/07/19
DATE
05/07/19
DATE
05/07/19

MATL
FINISH
SCALE
SHEET NO.

1 : 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
USB A/F 180度直立式 H:10.5, 無捲邊
SUA-110V16x-x-S235
SUA-110V16x-x-S235

SIZE
A4
VER
R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新樣式	Jack	050719
1	更新為A0版	Jack	030217