

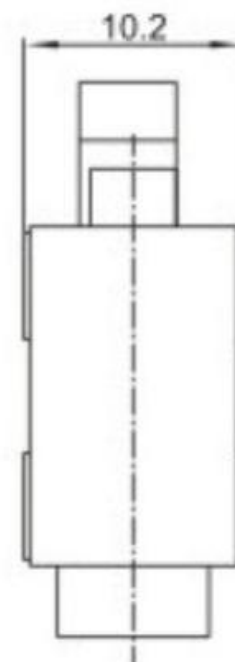


CAD FILE:

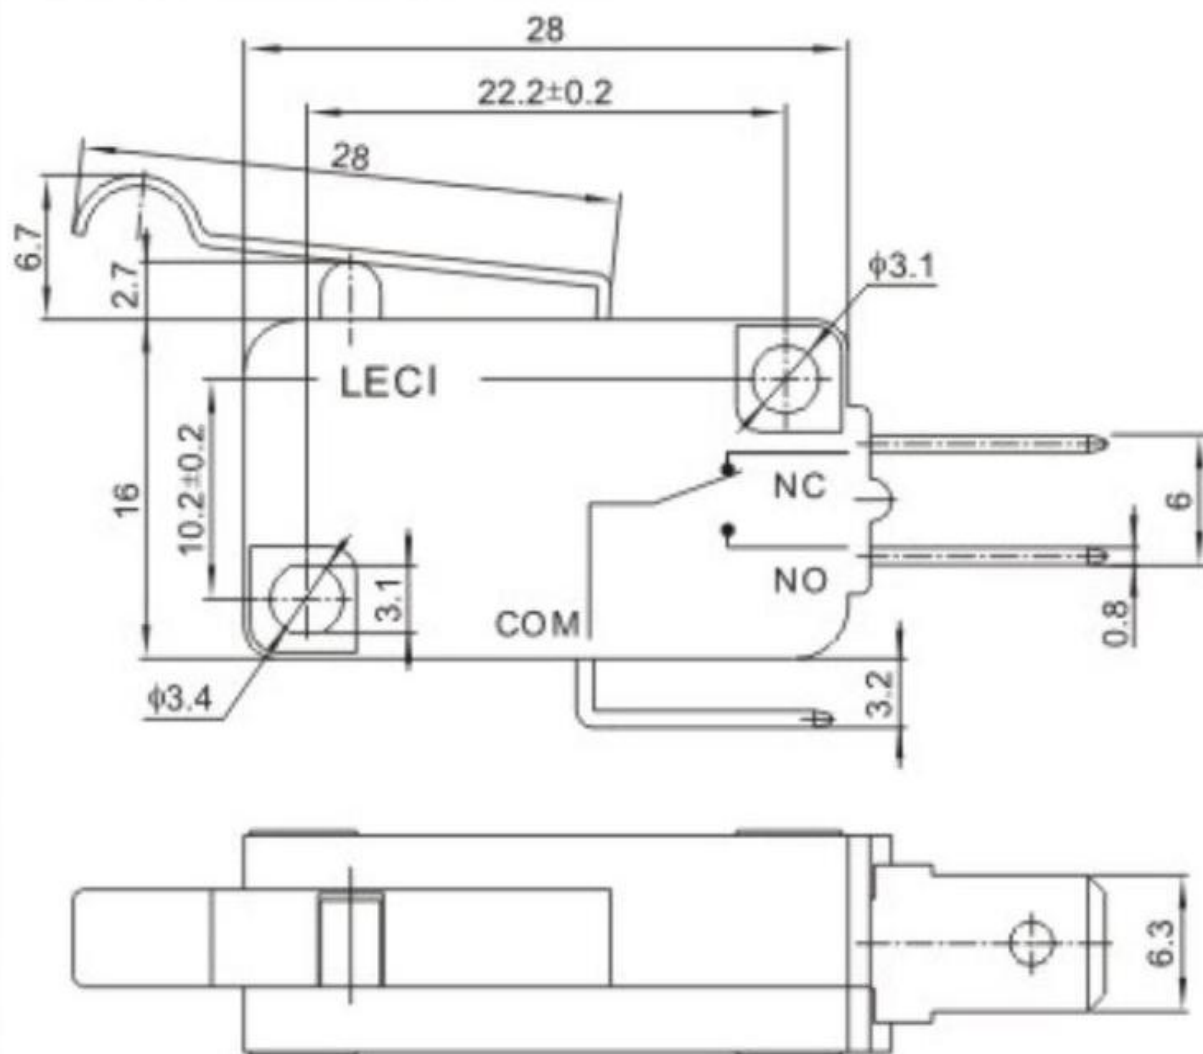

SCHEMATIC (NON-SHORTING)

額定電流、電壓 RATING

16A 250VAC μ 1E4 T85

12A 250VAC/15A 125VAC

接觸電阻 CONTACT RESISTANCE $\leq 20\text{m}\Omega$

 $\leq 20\text{m}\Omega$ 絶縁電阻 INSULATION RESISTANCE $\geq 100\text{M}\Omega$ $\geq 100\text{M}\Omega$

介電強度 DIELECTRIC INTENSITY $\geq 1250\text{VAC}/3\text{S}$

 $\geq 1250\text{VAC}/3\text{S}$

電器壽命 ELECTRICAL LIFE $\geq 10,000$ Cycles

≥ 10,000 Cycles

注：“*”□表示关键尺寸(4个).

				TOLERANCE UNLESS SPECIFIED							
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : ±0.1mm	A		初版			
6	CONTACT	AG	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
5	SHRAPNEL	PBS	1	NATURAL							
4	KNOE	PA9T	1	BLACK	TITLE :	MICRO SWITCH	UNIT :	mm	DRWG NO.:		
3	COVER	PA66	1	BLACK	MODEL:		SCALE:	3:1	DWN.	刘工	2008.6.8
2	BASE	PA9T	1	BLACK					CHK'D	戴海明	2008.6.8
1	TERMINAL	BRASS STRIP	3	Ag PLATED	東莞市高迪電子有限公司				APPD.	林小姐	2008.6.8
NO.	PARTS	MATERIALS	Q'TY	FINISH							