
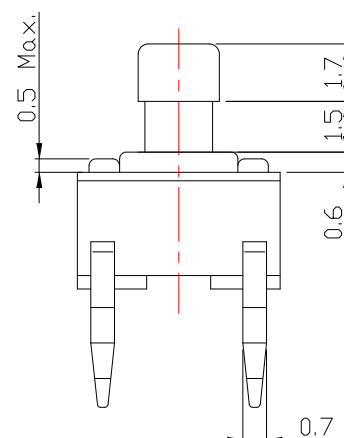
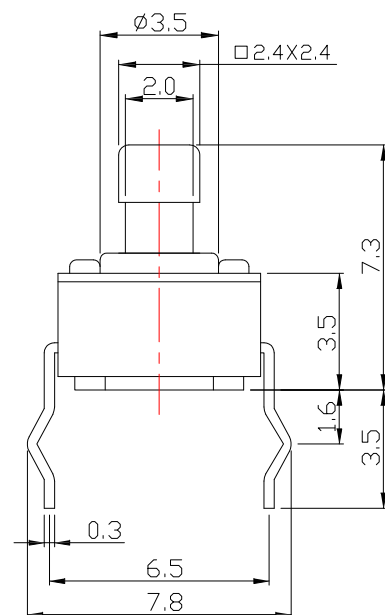
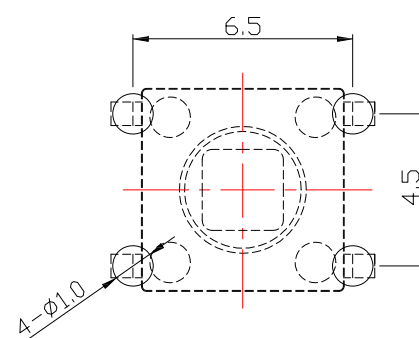


CIRCUIT DIAGRAM

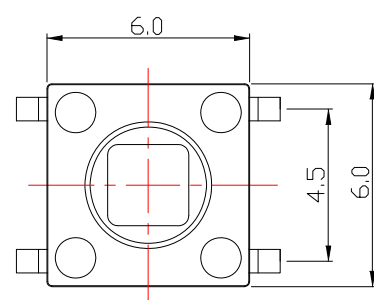

P.C.B LAYOUT
MOUNTING PATTERN

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	100mΩ Max.		
Travel	0.25 ± 0.1mm		
Operating Force	2	160 ± 50gf	3 250 ± 50gf
Operating Life (cycle)	100,000 cycles		



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
Jack Lu	01/12/15					
CHECKED BY:	DATE	FINISH		MODLE	TACT SWITCH	
Jacky Chen	01/12/15					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	TS-A02T-x-S126	SIZE A4
Tony Kao	01/12/15	SHEET NO.	1 of 1	PART NO.	TS-A02T-x-S126	VER R