




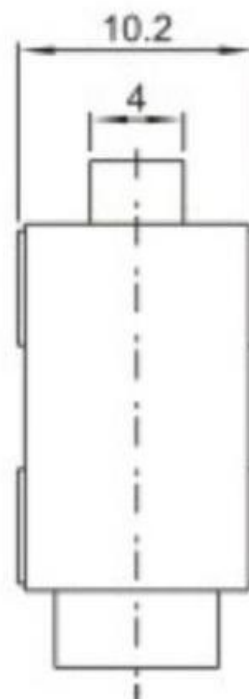

CAD FILE:

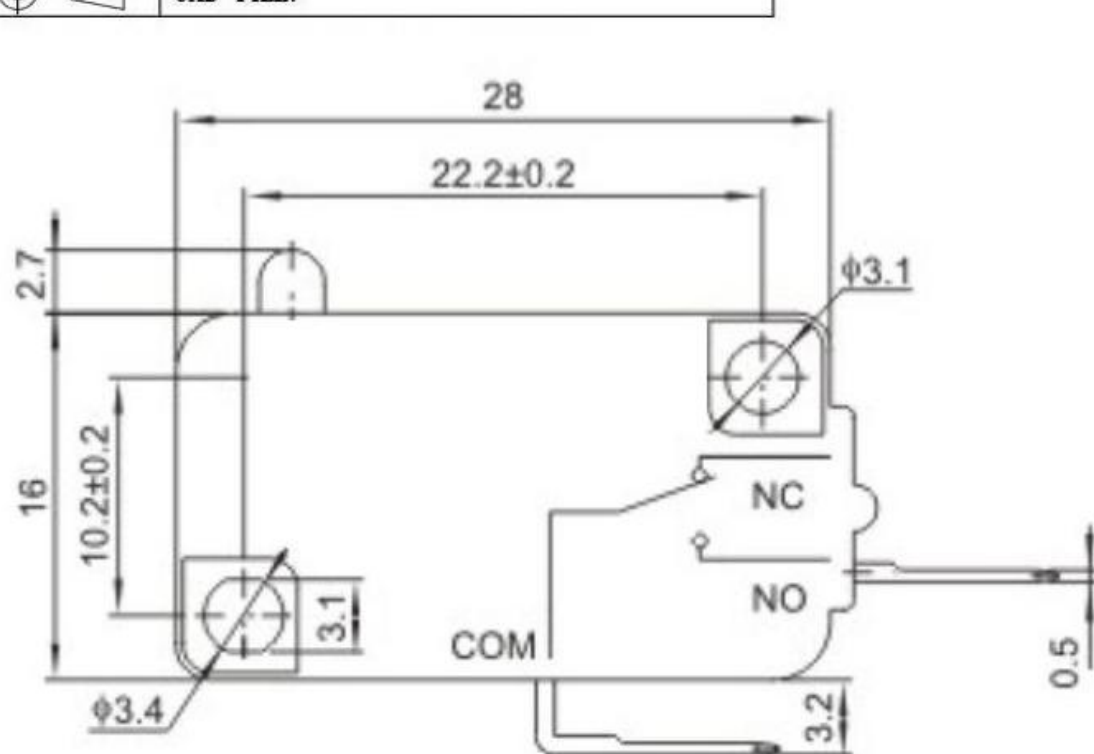

SCHEMATIC (NON-SHORTING)

額定電流、電壓 RATING

16A 250VAC μ 1E4 T85
12A 250VAC/15A 125VAC

接觸電阻 CONTACT RESISTANCE

 $\leq 20\text{m}\Omega$

絕緣電阻 INSULATION RESISTANCE

 $\geq 100\text{M}\Omega$

介電強度 DIELECTRIC INTENSITY

 $\geq 1250\text{VAC}/3\text{S}$

電器壽命 ELECTRICAL LIFE

 $\geq 10,000$ Cycles

注：“*”口表示关键尺寸(4个).

					TOLERANCE UNLESS SPECIFIED						
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A		初 版			
6	CONTACT	AG	1	NATURAL							
5	SHRAPNEL	PBS	1	NATURAL		ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
4	KNOE	PA9T	1	BLACK	TITLE : MICRO SWITCH			UNIT : mm	DRWG NO.:		
3	COVER	PA66	1	BLACK	MODEL:			SCALE: 3:1	DWN.	刘 工	2008.6.8
2	BASE	PA9T	1	BLACK	東莞市高迪電子有限公司			CHK'D	戴海明	2008.6.8	
1	TERMINAL	BRASS STRIP	3	Ag PLATED				APPD.	林小姐	2008.6.8	
NO.	PARTS	MATERIALS	Q'TY	FINISH							

東莞市高迪電子有限公司

2008.6.8

2008.6.8

2008.6.8