



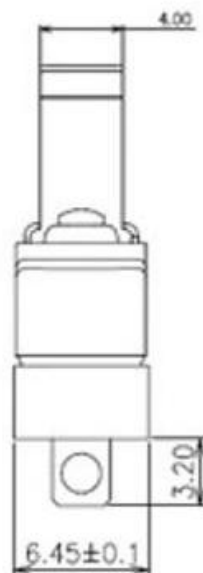


CAD FILE:

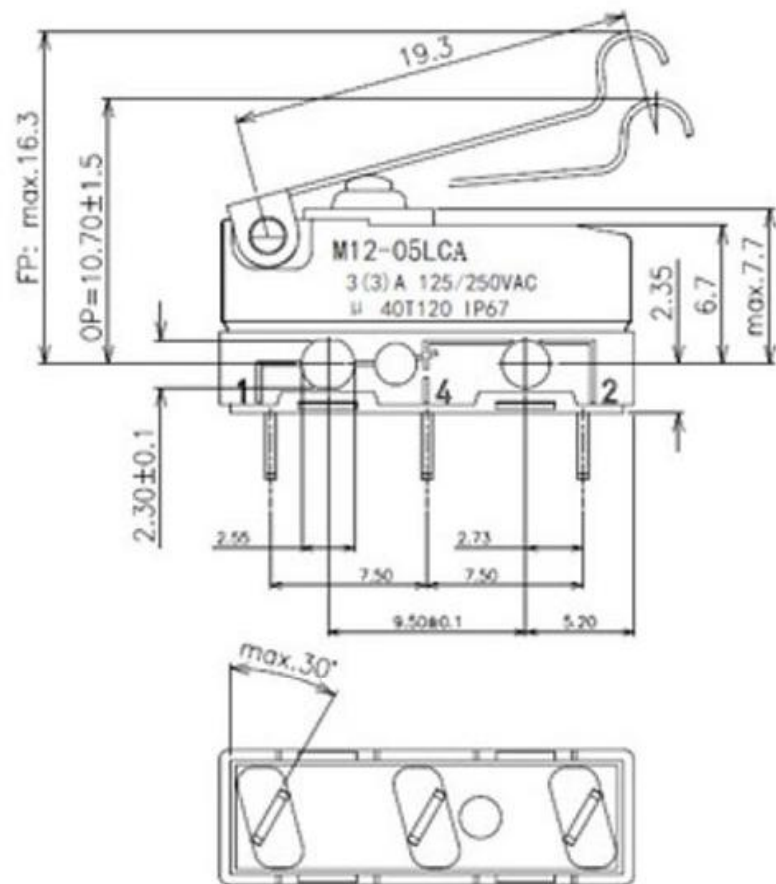

SCHEMATIC (NON-SHORTING)

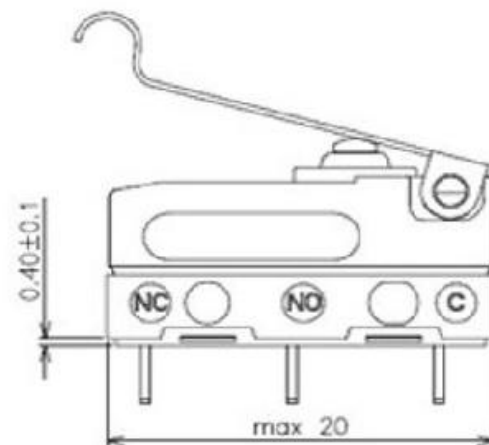

額定電流、電壓 RATING

16A 250VAC μ 1E4 T85
12A 250VAC/15A 125VAC

接觸電阻 CONTACT RESISTANCE

≤ 20mΩ

絕緣電阻 INSULATION RESISTANCE

≥ 100MΩ

介電強度 DIELECTRIC INTENSITY

≥ 1250VAC/3S

電器壽命 ELECTRICAL LIFE

≥ 10,000 Cycles

注：“*”口表示关键尺寸(4个).

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED		DATE	DESCRIPTIONS OF REVISION	APPD.
					WITHIN 1.5mm : ±0.1mm	A			
7	PLASTIC HANDLE	PA66	1	BLACK	OVER 1.5mm : ±0.2mm	ISSUE		初版	
6	CONTACT	AG	1	NATURAL	TITLE : MICRO SWITCH				
5	SHRAPNEL	PBS	1	NATURAL	MODEL:				
4	KNOB	PA9T	1	BLACK	UNIT : mm				
3	COVER	PA66	1	BLACK	SCALE: 3:1				
2	BASE	PA9T	1	BLACK	DRWG NO.:				
1	TERMINAL	BRASS STRIP	3	Ag PLATED	DWN. 刘工 2008.6.8				
					CHK'D 戴海明 2008.6.8				
					APPD. 林小姐 2008.6.8				

東莞市高迪電子有限公司