
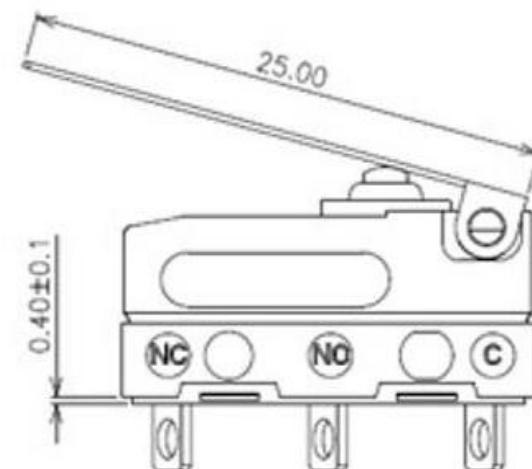


OF	RF	PT	DT	OT
340cN max.	80cN min.	1mm max.	0.1mm max.	0.6 mm min.

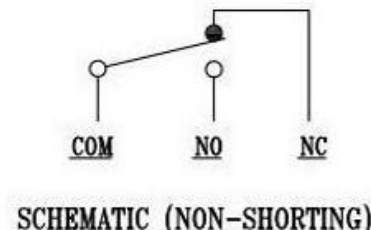

額定電流、電壓 RATING

16A 250VAC μ 1E4 T85
12A 250VAC/15A 125VAC

接觸電阻 CONTACT RESISTANCE

 $\leq 20\text{m}\Omega$

絕緣電阻 INSULATION RESISTANCE

 $\geq 100\text{M}\Omega$

介電強度 DIELECTRIC INTENSITY

 $\geq 1250\text{VAC}/3\text{S}$

電器壽命 ELECTRICAL LIFE

≥ 10,000 Cycles

注：“*”□表示关键尺寸(4个)。

					TOLERANCE UNLESS SPECIFIED							
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm		A		初 版			
6	CONTACT	AG	1	NATURAL			ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
5	SHRAPNEL	PBS	1	NATURAL								
4	KNOE	PA9T	1	BLACK	TITLE : MICRO SWITCH				UNIT : mm	DRWG NO.:		
3	COVER	PA66	1	BLACK	MODEL:				SCALE: 3:1	DWN.	刘工	2008.6.8
2	BASE	PA9T	1	BLACK	東莞市高迪電子有限公司				CHK'D	戴海明	2008.6.8	
1	TERMINAL	BRASS STRIP	3	Ag PLATED					APPD.	林小姐	2008.6.8	
NO.	PARTS	MATERIALS	Q'TY	FINISH								