



SUA-110V5x-x-S235

SHELL : _____






Color :

Blank : Phosphor Bronze

Black : B

I : SPCC

White : W

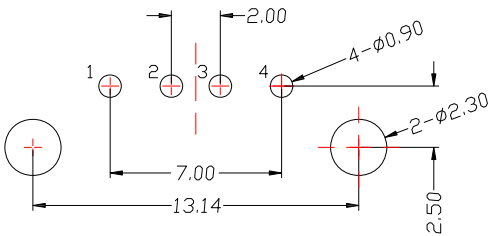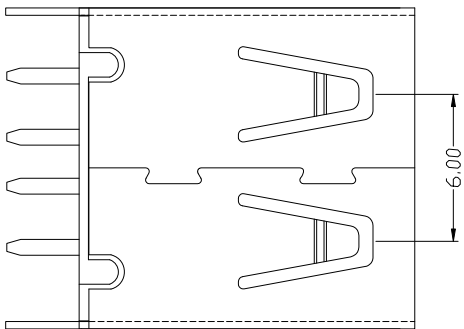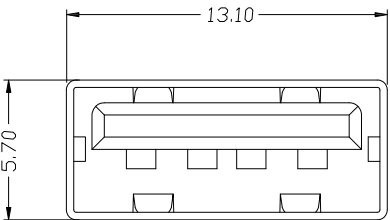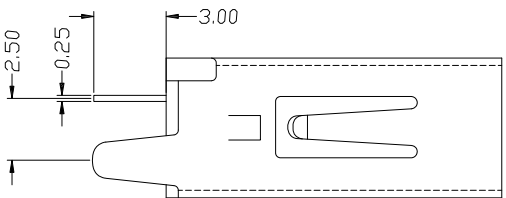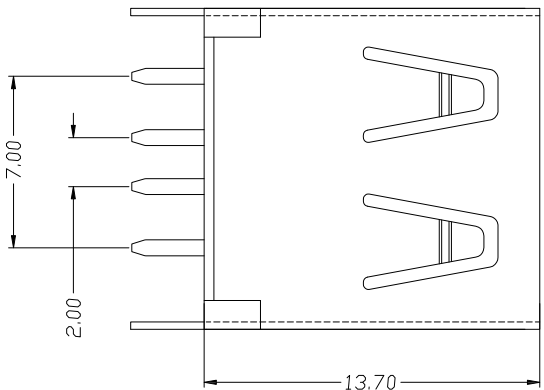

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 mΩ Max
- 2.Dielectric Withstanding Voltage: 500 V AC
- 3.Insulation Resistance: 1,000 MΩ Min

Mechanical:

- 1.Insertion Force: 35N (3.57 kgf) Max
- 2.Extraction Force: 10~35N (1.02~3.57 kgf) Min
- 3.Operating Temperature: -55°C ~ 85°C



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 05/04/15
DATE: 05/04/15
DATE: 05/04/15

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB AF 直插脚 180度 L:13.7 平口
SCALE	1 : 1	DWG NO.	SUA-110V5x-x-S235
SHEET NO.	1 of 1	PART NO.	SUA-110V5x-x-S235

SIZE
A4
VER
R