
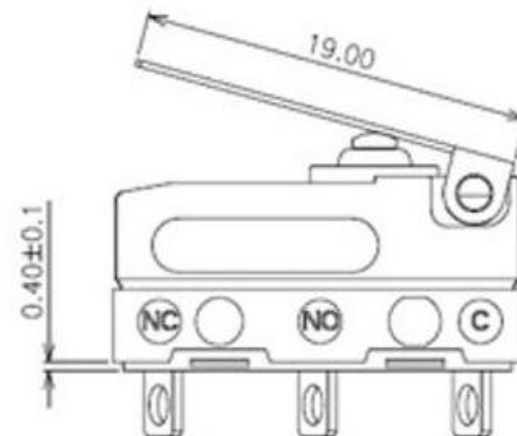
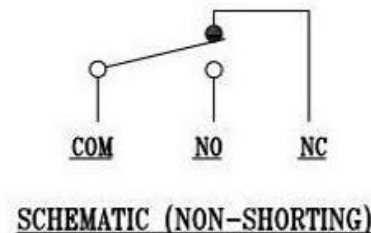


OF	RF	PT	DT	OT
340°C max.	80°C min.	1mm max.	0.1mm max.	0.6 mm min.

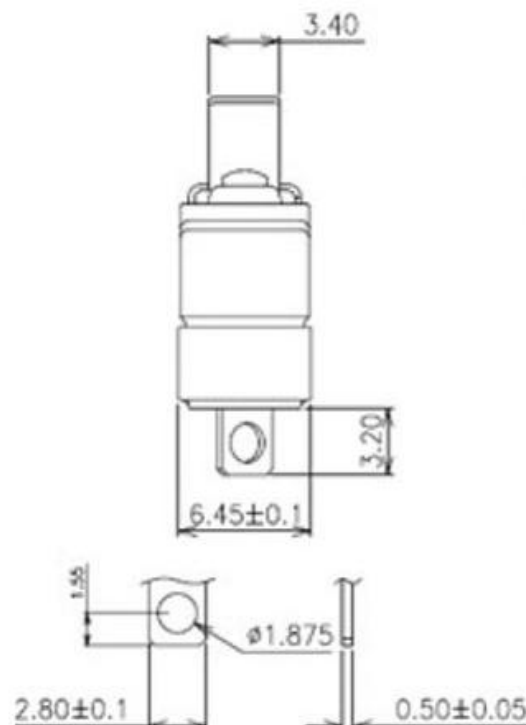

額定電流、電壓 RATING

16A 250VAC μ 1E4 T85
12A 250VAC/15A 125VAC

接觸電阻 CONTACT RESISTANCE

 $\approx 20\text{m}\Omega$ 絶縁電阻 INSULATION RESISTANCE $\geq 100\text{M}\Omega$ $\geq 100\text{M}\Omega$

介電強度 DIELECTRIC INTENSITY

≥ 1250VAC/3S

電器壽命 ELECTRICAL LIFE

≥ 10,000 Cycles

注：“*”□表示关键尺寸(4个).

					TOLERANCE UNLESS SPECIFIED					
7	PLASTIC HANDLE	PA66	1	BLACK						
6	CONTACT	AG	1	NATURAL	WITHIN 1.5mm : ±0.1mm	A		初 版		
5	SHRAPNEL	PBS	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	KNOE	PA9T	1	BLACK	TITLE : MICRO SWITCH			UNIT : mm	DRWG NO.:	
3	COVER	PA66	1	BLACK	MODEL:			SCALE: 3:1	DWN.	刘 工
2	BASE	PA9T	1	BLACK					CHK'D	戴海明
1	TERMINAL	BRASS STRIP	3	Ag PLATED					APPD.	林小姐
NO.	PARTS	MATERIALS	Q'TY	FINISH	東莞市高迪電子有限公司					