

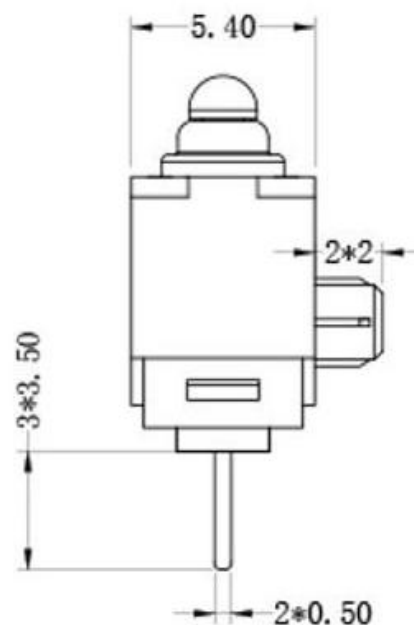


CAD FILE:

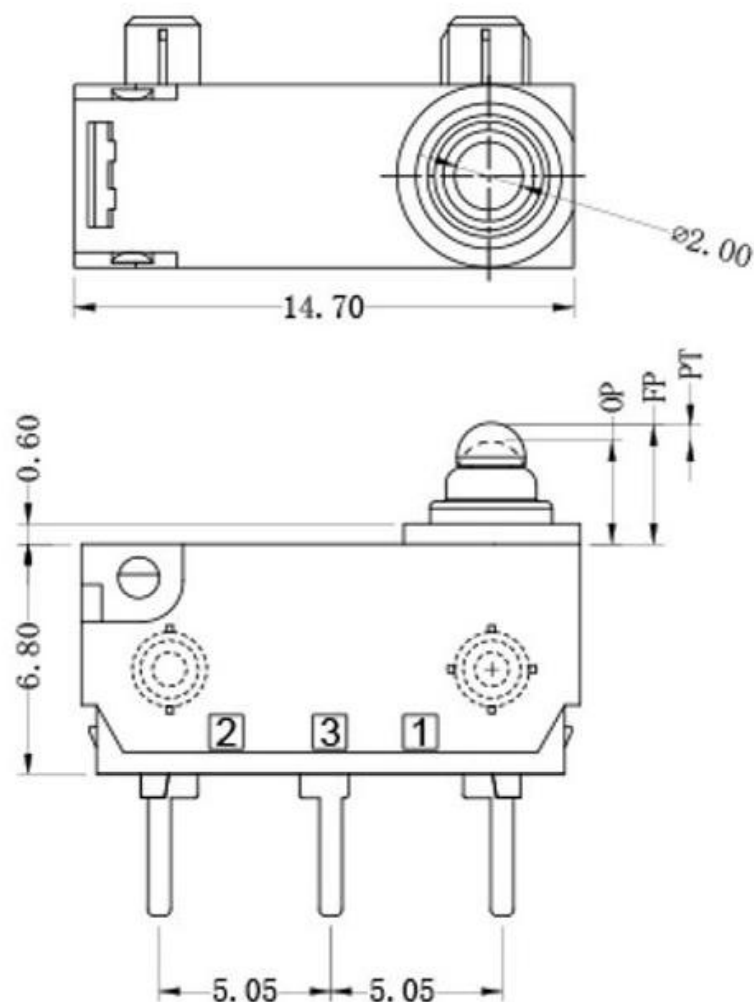

SCHEMATIC (NON-SHORTING)

額定電流、電壓 RATING

16A 250VAC μ 1E4 T85
12A 250VAC/15A 125VAC

接觸電阻 CONTACT RESISTANCE

 $\leq 20\text{m}\Omega$

絕緣電阻 INSULATION RESISTANCE

 $\geq 100\text{M}\Omega$

介電強度 DIELECTRIC INTENSITY

 $\geq 1250\text{VAC}/3\text{S}$

電器壽命 ELECTRICAL LIFE

 $\geq 10,000$ Cycles

注：“*”口表示关键尺寸(4个).

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED				
						A	DATE	DESCRIPTIONS OF REVISION	APPD.
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : $\pm 0.1\text{mm}$ OVER 1.5mm : $\pm 0.2\text{mm}$	A	DATE	初版	
6	CONTACT	AG	1	NATURAL					
5	SHRAPNEL	PBS	1	NATURAL	TITLE : MICRO SWITCH	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	KNOB	PA9T	1	BLACK					
3	COVER	PA66	1	BLACK	MODEL:	SCALE: 3:1	UNIT : mm	DRWG NO.:	
2	BASE	PA9T	1	BLACK					
1	TERMINAL	BRASS STRIP	3	Ag PLATED	東莞市高迪電子有限公司			DWN. 刘工	2008.6.8
								CHK'D 戴海明	2008.6.8
								APPD. 林小姐	2008.6.8