




SUA-110PCxx-x-S175

SHELL : Blank : BRASS I : SPCC COLOR : Black: B White : W

鍍層厚度 : Blank : 1u" 2 : 15u" 3 : 30u"

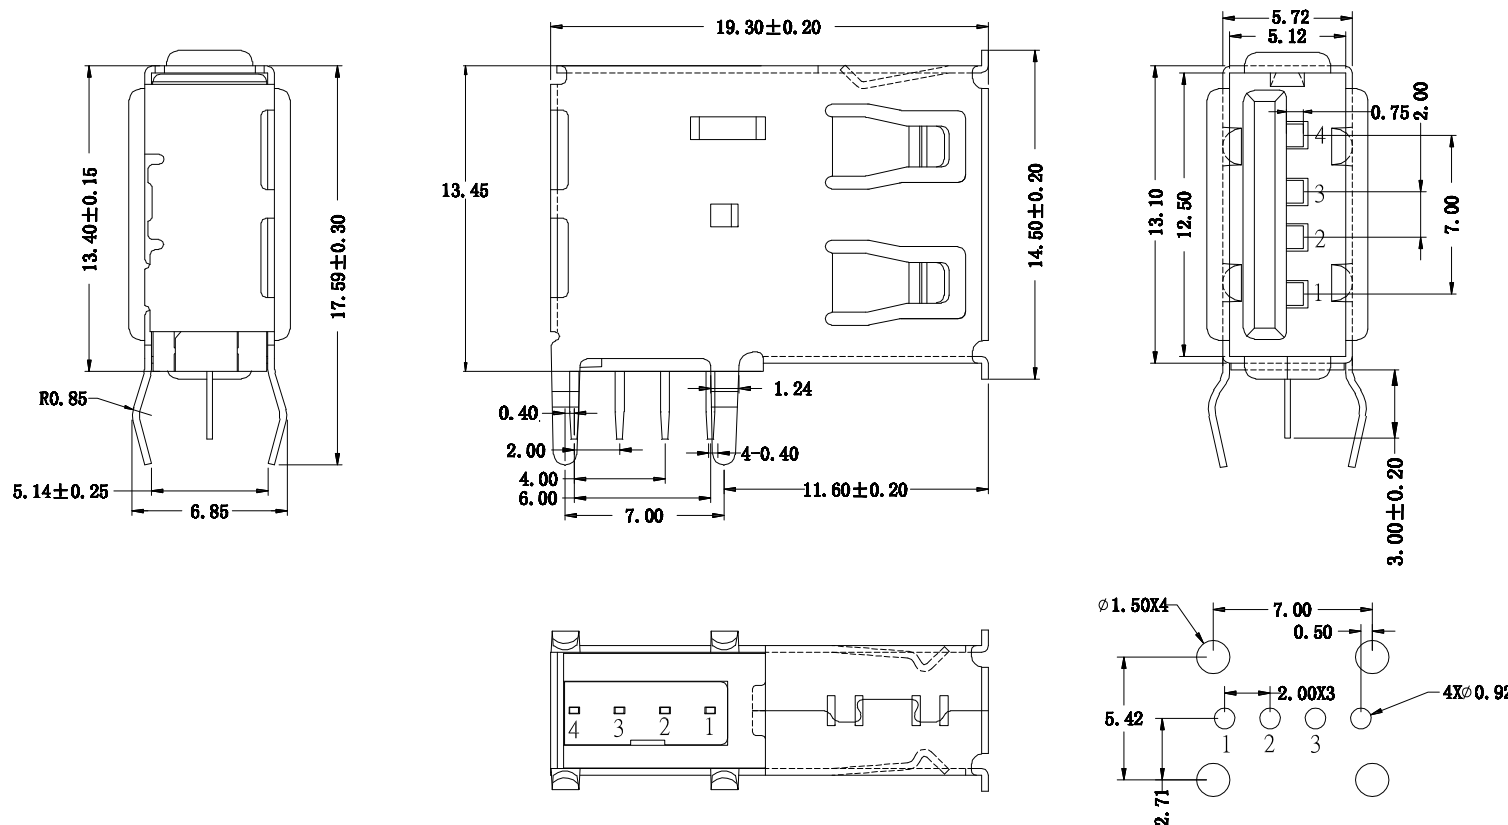

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30 VDC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC AT Sec Level
- 5.Insulation Resistance: 1,000 MΩ Min

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Spcc / Brass

Finish:

- 1.Contact: Plated Gold in Mating Area;
Tin on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel Plating

P.C.B LAYOUT MOUNTING PATTERN



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
04/16/20
04/16/20
04/16/20

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
USB AF 側插 90度 有後蓋 自動機
SUA-110PCxx-x-S175
SUA-110PCxx-x-S175

SIZE
A4
VER
R3