



SUA-110M36x-x-S235

Shell Material :

Blank : BRASS

I : SPCC

Color :

White : W

Black : B

SPECIFICATIONS

Electrical:





- 1.Contact Resistance: 30 mΩ Max
- 2. Insulation Resistance: 1,000 MΩ Min
- 3.Dielectric Withstanding Voltage: 500 V DC
- 4.Insertion Force: 35N Max
- 5.Extraction Force: 10N Min

Material:

- 1.Housing: LCP , UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass / SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

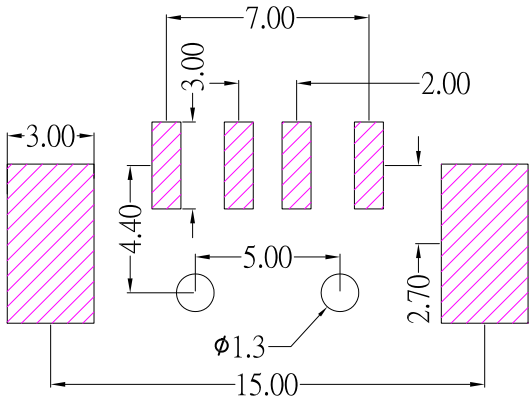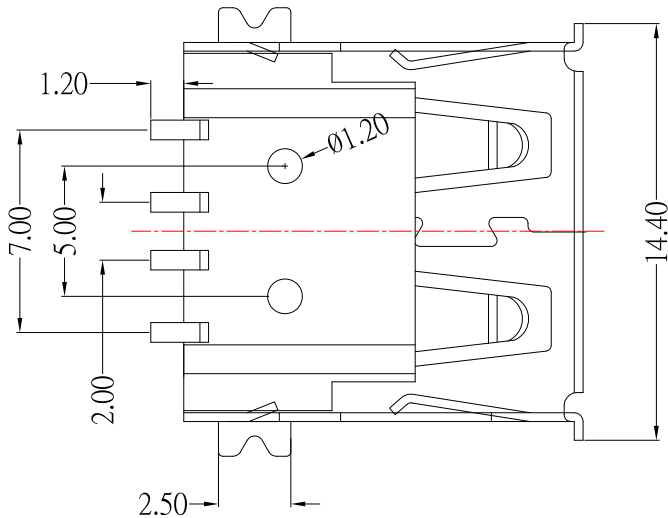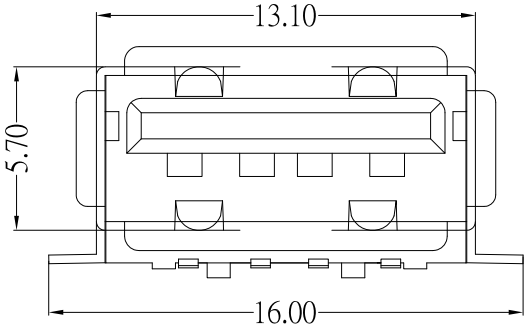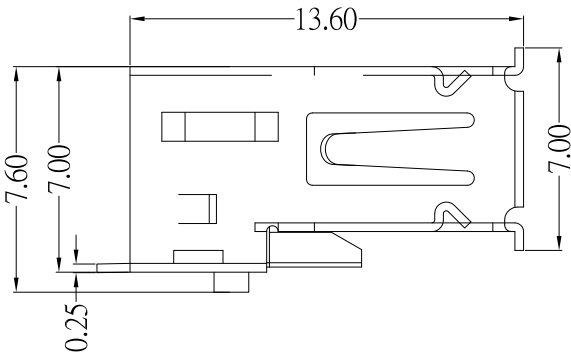

RECOMMENDED PCB LAYOUT



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 12/14/17
DATE: 12/14/17
DATE: 12/14/17

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	USB AF SMT 外殼腳貼板
SCALE	DWG NO.	SUA-110M36x-x-S235
SHEET NO.	PART NO.	SUA-110M36x-x-S235

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新圖面	Jack	121417
3	更新PCB LAYOUT尺寸	Jack	053117
2	更新為A0版	Jack	031617
1	更新PCB LAYOUT尺寸	Jack	011617