





SUA-110M34AI-x-S235





Color :

White : W

Black : B

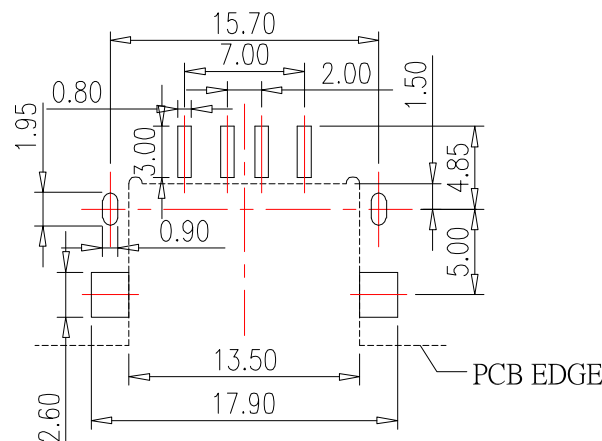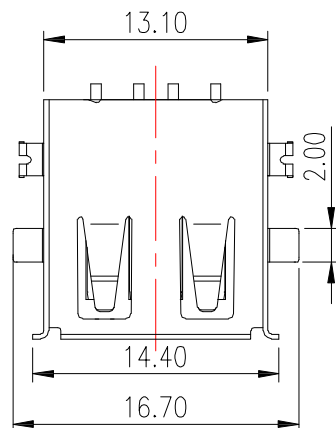

PCB LAYOUT

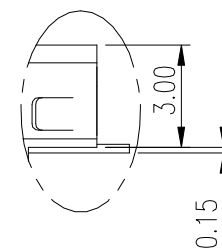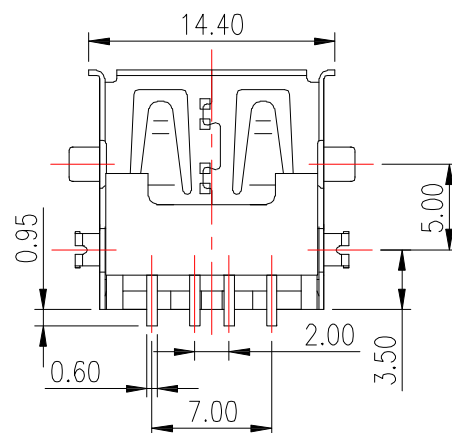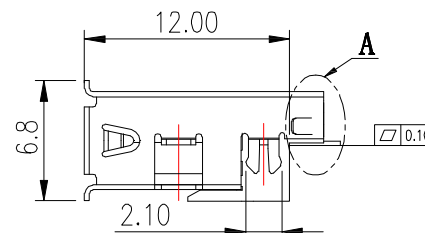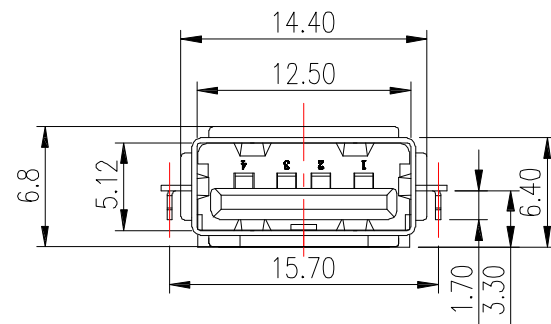

DET "A" 2:1

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 m Ω Max
- 2.Insulation Resistance: 1000 M Ω Min
- 3.Dielectric Withstanding Voltage: 500 V AC

Material:

- 1.Housing: LCP , UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
09/17/18
DATE
09/17/18
DATE
09/17/18

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
USB A/F 反向沉板SMT , 板上H:3.0mm
SUA-110M34AI-x-S235
SUA-110M34AI-x-S235

SIZE
A4
VER
A1

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新外觀樣式	Jack	091718
1	更新SPEC及更新為A0版	Jack	060116