


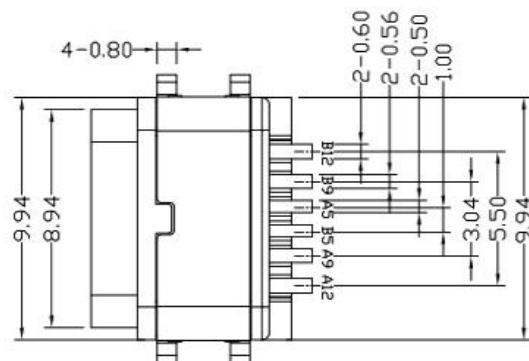


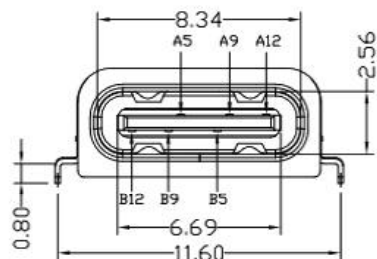


RoHS
Compliant
2002/95/EC

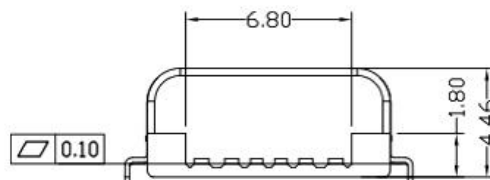

REV.	ECN.	NO.	APPD.

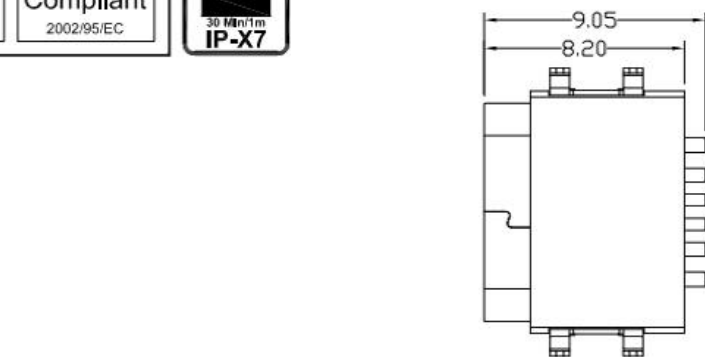

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

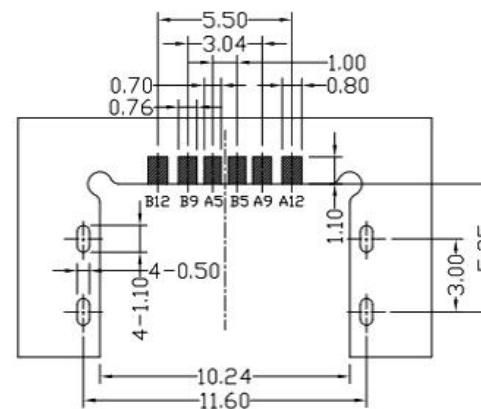

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:

1.ELECTRICAL:

- 1)CURRENT RATING: 3A MAX.
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 40mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC
- 5)OPERATING TEMPERATURE: -30°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 5N~20N
- 2)Unmating Force: 8N~20N
- 3)Durability: 10,000 cycles

3.DIMENSIONS MARKED "▽"

TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

14u 10"	1PBT
24u 30"	2PA6T
54u 15u"	3PA9T
64u 30u"	4LCP

6	WATERPROOF RING	硅橡胶	1	BLACK	X.X ±0.30	X.* ±2'	UNITS	mm
5	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.20	.XX' ±1'	MAT'L	
4	SHIELDING PLATE	STAINLESS STEEL	1		.XXX ±0.10	.XXX' ±0.5'	SEE NOTE	
3	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN			FINISH	
2	SHELL HOUSING	LCP+30%GF	1	UL94V-0			SEE NOTE	
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY	
NO	PARTS	MATERIAL	QTY	FINISHING				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.



東莞市高迪電子有限公司
DONGGUANGAODI ELECTRONICS CO., LTD.

TITLE:
USB Type-CF 单排6P
四脚插板 防水型
DR: Ricky 2019/08/20
CHKD: Ricky 2019/08/20
APPD:

PART NO.:			
DWG NO.:			
SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	