

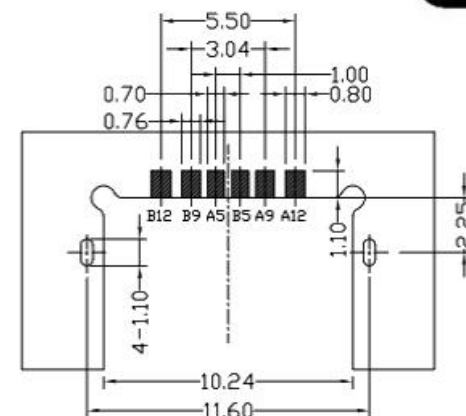
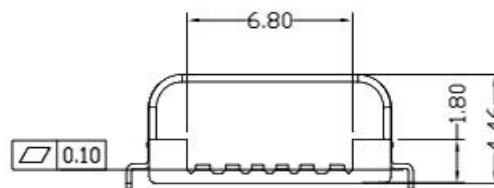




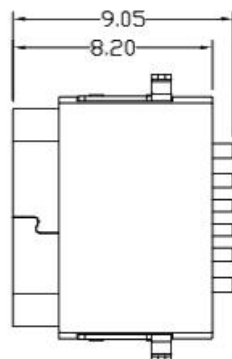


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

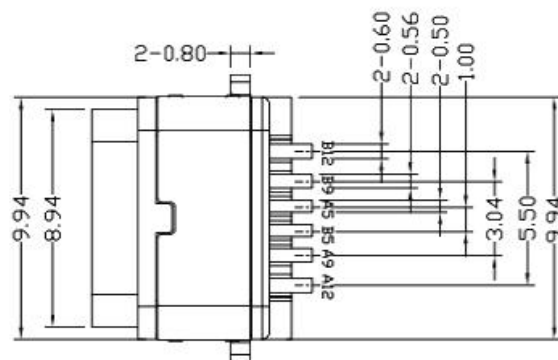

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

1.ELECTRICAL:

- 1)CURRENT RATING: 3A MAX.
- 2)INSULATION RESISTANCE: 100M Ω MIN;
- 3)CONTACT RESISTANCE: 40m Ω MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC
- 5)OPERATING TEMPERATURE:-30°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 5N~20N
- 2)Unmating Force: 8N~20N
- 3)Durability: 10,000 cycles

3.DIMENSIONS MARKED '▼'

TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

14u 1U'
24u 3U'
54u 15U'
64u 30U'

W/WHITE
B/BLACK

1PBT
2PA6T
3PA9T
4LCP

6	WATERPROOF RING	硅橡胶	1	BLACK	X.X ± 0.30	X.* $\pm 2^*$	UNITS	mm
5	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ± 0.20	.XX* $\pm 1^*$	MAT'L	
4	SHIELDING PLATE	STAINLESS STEEL	1		.XXX ± 0.10	.XXX* $\pm 0.5^*$	SEE NOTE	
3	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN			FINISH	
2	SHELL HOUSING	LCP+30%GF	1	UL94V-0			SEE NOTE	
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY	
NO	PARTS	MATERIAL	QTY	FINISHING				

THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF ACCURATE INNOTECH
INC. AND SHALL NOT BE REPRODUCED, COPIED
OR USED IN ANY MANNER WITHOUT THE
PRIOR WRITTEN CONSENT OF ACCURATE
INNOTECH INC.



東莞市高迪電子有限公司
DONGGUANGAODIELECTRONICS CO.,LTD.

TITLE: USB Type-CF
半掛6P 四層板板 防水型

PART NO.:

DR: Ricky 2019/08/20

DWG NO.:

CHKD: Ricky 2019/08/20

APPD:

SCALE	SHEET	REV.	CUSTOMER
1:1	1/1	B	DRAWING