


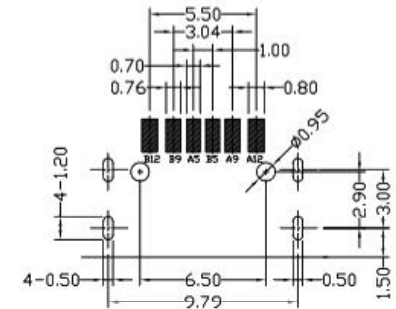








RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.



加防水圈示意图

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

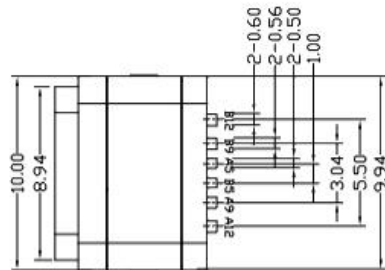

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

1.ELECTRICAL:

- 1)CURRENT RATING: 3A MAX.
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 40mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC
- 5)OPERATING TEMPERATURE:-30°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 5N~20N
- 2)Unmating Force: 8N~20N
- 3)Durability: 10,000 cycles

3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

14u 10"
2Au 30"
5Au 15u"
6Au 30u"

V:WHITE
B:BLACK
1PBT
2PA6T
3PA9T
4LCP

6	WATERPROOF RING	硅橡胶	1	BLACK	X.X ±0.30	X.* ±2*	UNITS	mm	 东莞市高迪电子有限公司 DONGGUANGAODIELECTRONICS CO., LTD.				
5	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.20	.XX* ±1*	MAT'L						
4	SHIELDING PLATE	STAINLESS STEEL	1		.XXX ±0.10	.XXX* ±0.5*	SEE NOTE		TITLE:		PART NO.:		
3	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN			FINISH		USB Type-CF 单排6P 板上防水型				
2	SHELL HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			SEE NOTE	DR: Ricky 2019/08/19		DWG NO.:		
1	HOUSING	LCP+30%GF	1	UL94V-0				Q'TY	CHKD: Ricky 2019/08/19				
NO	PARTS	MATERIAL	QTY	FINISHING					APPD:		SCALE	SHEET	REV.
									1:1	1/1	B		