


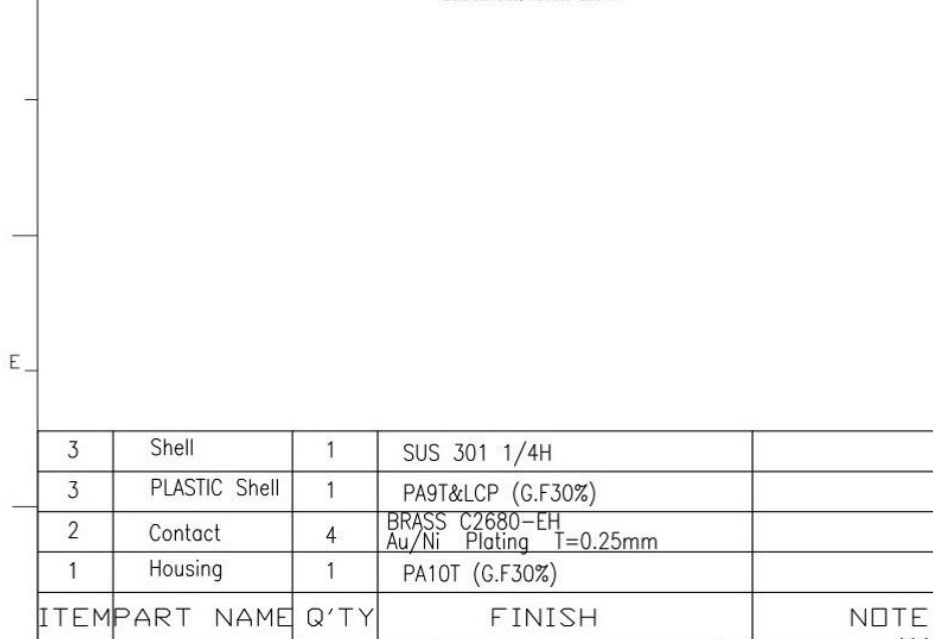

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES

X. ± 0.50		X.* ± 2°		UNITS mm		 東莞市高迪電子有限公司 DONGGUANGAODI ELECTRONICS CO., LTD.				
.X ± 0.30		.X* ± 1°		MAT'L /		PART NO.		TITLE: IP68		
.XX ± 0.10		.XX* ± 0.5°								
.XXX ± 0.05										
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.				FINISH /		APPD: RADDM		DWG NO: USB connector		
				Q'TY /		CHKD: MARK				
								DR: JANE CHOU 2019/07/11		
								SCALE	SHEET	REV.
								1/1	1/2	A2